


RoLED 70/416

RoLED 70/216

System of protection	IP67
Series	Ø 70 mm
Length	725 mm
Protective tube	G = Borosilikat glass K = PMMA
Power LED	35 / 42 W
Voltage	24 V/DC or 230 V
Luminous	3000 Lumen
Item nos.	591-155-001 (24 V / 33,6 W) 591-155-002 (24 V / 33,6 W) 591-156-001 (230 V / 40,5 W) 591-156-002 (230 V / 40,5 W)

CHARACTERISTICS

- LED option to Lumolux KE/236 and KE/436
- Several fastening options
- Machine lamp / tubular lamp
- Different versions available
- IP 67

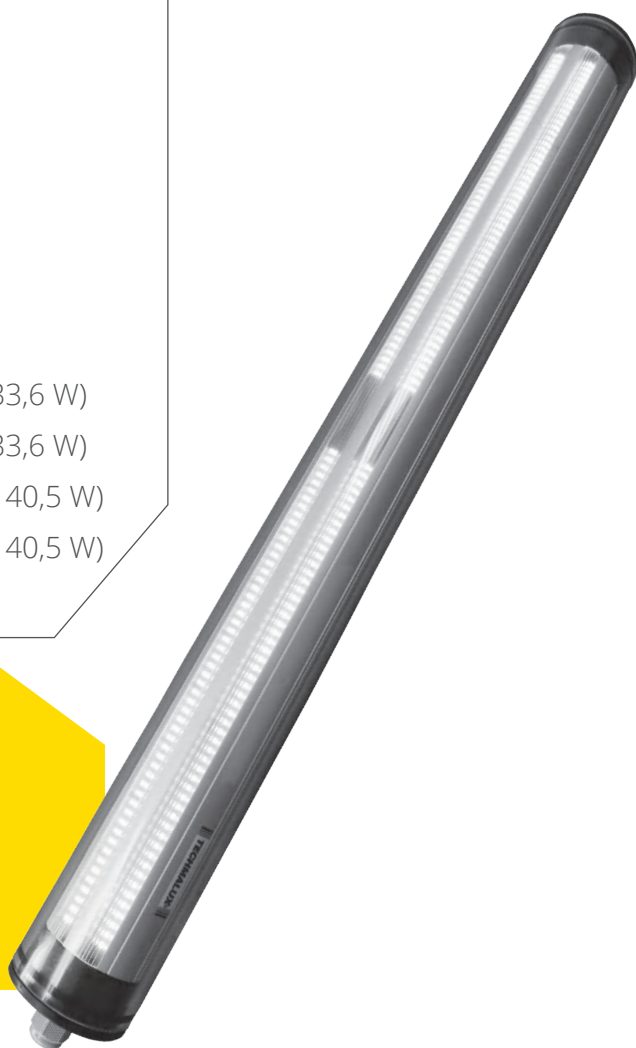

RoLED 70/416


RoLED 70/216




TYPE	PROTECTIVE TUBE	ITEM NO.	POWER LED	LUMINOUS / LUMEN	LENGTH / MM	VOLTAGE
RoLED 70/416	K	591-155-001	33,6 W	4200	725	24 V/DC
RoLED 70/416	G	591-155-002	33,6 W	4200	725	24 V/DC
RoLED 70/216	K	591-156-001	40,5 W	4200	725	230 V, 50-60 Hz
RoLED 70/216	G	591-156-002	40,5 W	4200	725	230 V, 50-60 Hz

Our RoLED-lamp is available in different versions. More information available on request!


DRAWING

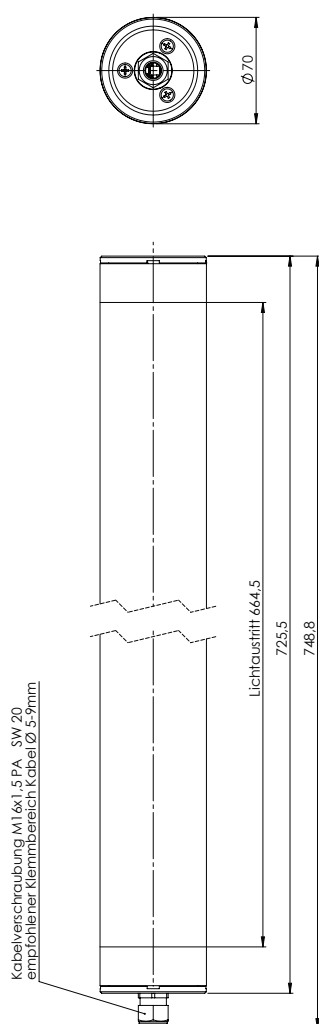


FASTENING with fixing clamp




item no. :
599-001-001




item no. :
599-001-002



item no. :
599-001-003



item no. :
599-001-004



item no. :
599-001-016