

# Surface Mount Bandpass Filter

## BPF-C4R5+

50Ω 2 to 7 MHz

### The Big Deal

- Low insertion loss
- Good VSWR
- Miniature shielded package



CASE STYLE: HU1186

### Product Overview

BPF-C4R5+ is a bandpass filter fabricated using SMT technology. This filter offers good rejection and low insertion loss for use in aviation and communication systems. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability.

### Key Features

Feature	Advantages
Low insertion loss	Suitable for high performance applications.
Good VSWR, 1.1:1 typical in passband	The BPF-C4R5+ has very good VSWR which provides good matching when used with other devices.
Shielded package	Reduced interference with the surrounding components.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-C4R5+

50Ω 2 to 7 MHz



CASE STYLE: HU1186

### Features

- Low insertion loss
- Good VSWR
- Miniature shielded package

### Applications

- Aviation
- Communication systems

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	-	4.5	-	MHz
	Insertion Loss	F1-F2	2-7	0.5	1.5	dB
	VSWR	F1-F2	2-7	1.1	1.5	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-0.6	20	35.9	dB
	VSWR	DC-F3	DC-0.6	-	20	:1
Stop Band, Upper	Insertion Loss	F4-F5	17-2100	20	28.9	dB
	VSWR	F4-F5	17-2100	-	20	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

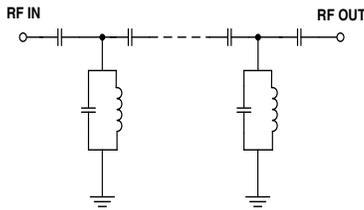





### Typical Frequency Response

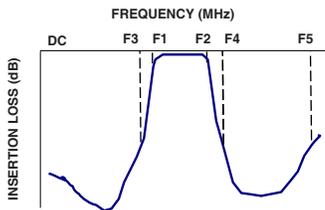

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.10	88.93	898.07	2.0	250.52
0.60	35.20	293.81	2.2	212.56
0.66	30.30	215.92	2.6	165.56
0.79	20.51	92.29	2.8	150.39
1.08	3.05	4.05	3.0	132.37
1.10	2.43	3.31	3.2	127.88
2.00	0.25	1.06	3.4	123.03
4.50	0.29	1.09	3.6	117.89
7.00	0.49	1.04	3.8	112.44
9.00	1.00	1.34	4.0	107.33
9.90	2.17	2.34	4.2	103.11
10.30	3.21	3.22	4.4	99.60
14.20	20.03	20.48	4.8	94.30
17.00	29.73	25.63	5.0	92.33
17.10	30.03	25.75	5.4	89.40
500.00	99.85	43.88	5.8	87.64
950.00	78.75	35.82	6.2	86.75
1500.00	44.47	12.10	6.6	86.61
1960.00	38.39	2.77	6.8	86.83
2100.00	40.73	2.18	7.0	87.26

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

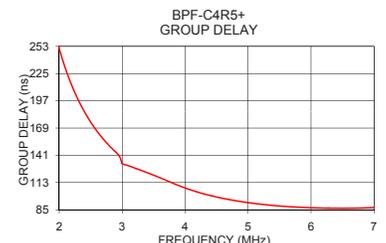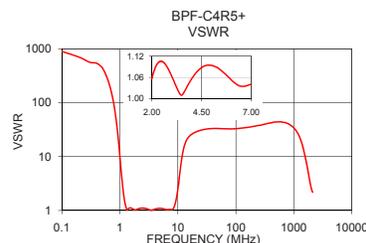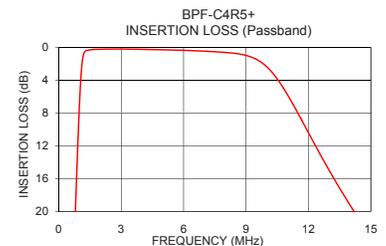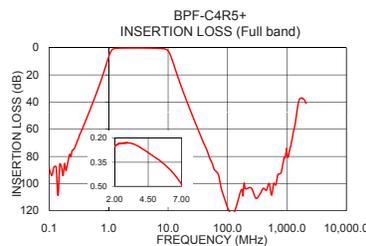

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Pad Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6 & 13
GROUND	1,3,4,5,7,8,10,11,12,14

**Demo Board MCL P/N: TB-500+**  
**Suggested PCB Layout (PL-294)**

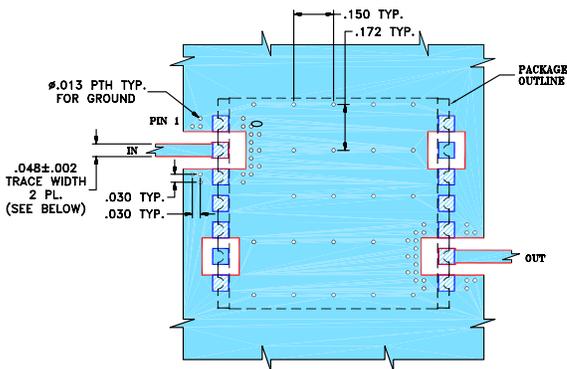


**NOTES:**


- TRACE WIDTH IS SHOWN FOR ROGERS R04850B.  
 DIELECTRIC THICKNESS:  $.030 \pm .002$ ;  
 COPPER: 1/2 OZ ON EACH SIDE.  
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

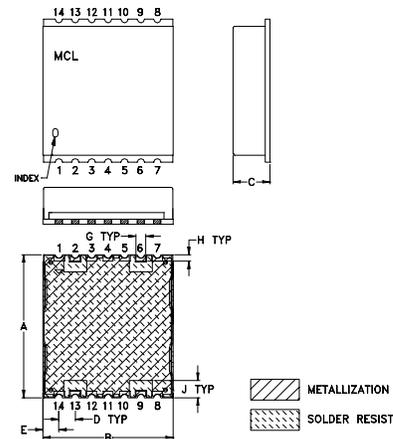

## PCB Land Pattern



Suggested Layout,  
 Tolerance to be within  $\pm .002$

## Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.870	.800	.25	.100	.097	--	.060	.040
22.10	20.32	6.35	2.54	2.46	--	1.52	1.02
J	K	L	M	N	P	wt	
.105	.910	--	.060	.060	--	grams	
2.67	23.11	--	1.52	1.52	--	2.85	

**Notes**

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)