

Setroline

System of protection	IP67 / IP69 K
Length	446 mm 725 mm 1285 mm
Cover plate	ESG - glass = toughened safety glass
Power LED	from 17,3 W to 77 W
Voltage	230 V/AC or 24 V/DC
Luminous	from 2000 to 8000 Lumen
Item nos.	591-170-021 (230 V/AC 17,3 W) 591-170-051 (24 V/DC 16,8 W) 591-170-001 (230 V/AC 34,6 W) 591-170-031 (24 V/DC 33,6 W) 591-170-011 (230 V/AC 77 W) 591-170-041 (24 V/DC 60,48 W)

CHARACTERISTICS


- Due to the new, innovative design, the lamp can be used as a
 - * built-in lamp
 - * surface lamp or as a
 - * kind of tubular lamp (with fixing clamps)
- Very robust Al-box!
- Toughened safety glass
- Plug connection M12
- IP 67/IP 69K - for extremely rough conditions
- LED-lamp




TYPE	COVER PLATE	ITEM NO.	POWER LED	LUMINOUS	LENGTH / MM	VOLTAGE	PLUG
Setroline	ESG	591-170-021	17,3 W	2000	446	230 V/AC	M12
Setroline	ESG	591-170-051	16,8 W	2100	446	24 V/DC	M12
Setroline	ESG	591-170-001	34,6 W	4000	725	230 V/AC	M12
Setroline	ESG	591-170-031	33,6 W	4200	725	24 V/DC	M12
Setroline	ESG	591-170-011	77 W	7912	1285	230 V/AC	M12
Setroline	ESG	591-170-041	60,48 W	7560	1285	24 V/DC	M12

FASTENING

1-4 surface lamps, 5 and 6 built-in lamps
(Fastening - without screws, seals and nuts)

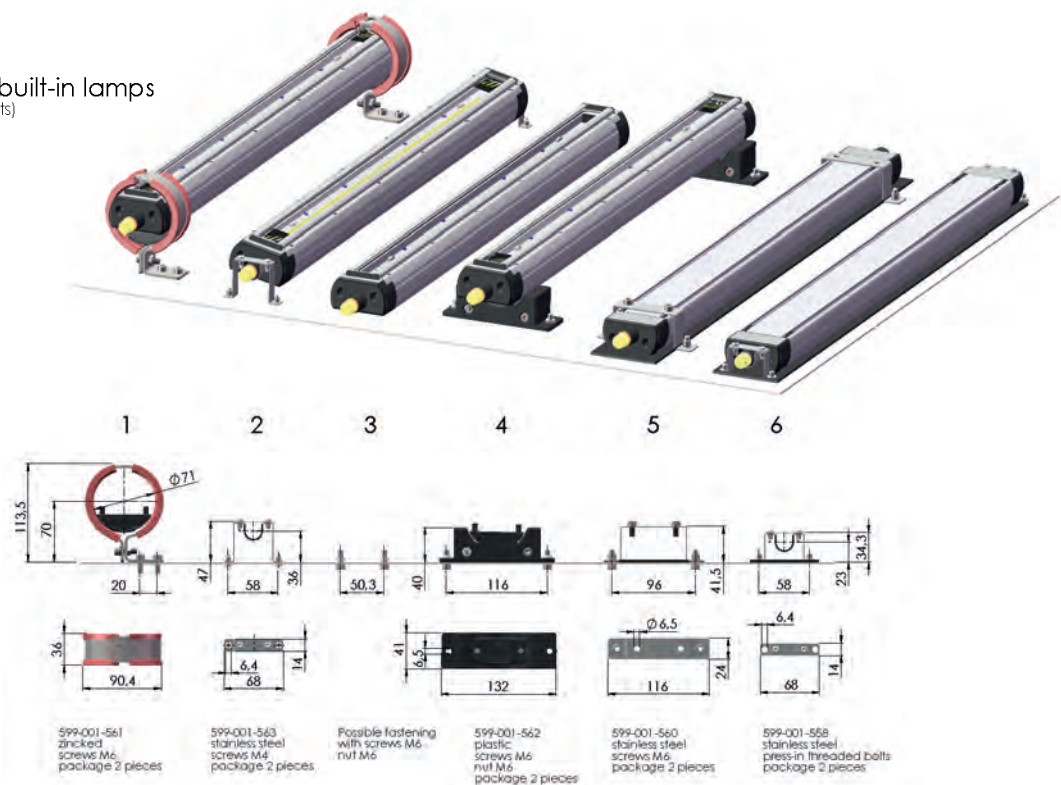

DRAWING (CORRESPOND TO ITEM 591-170-021 | 17,3 W)

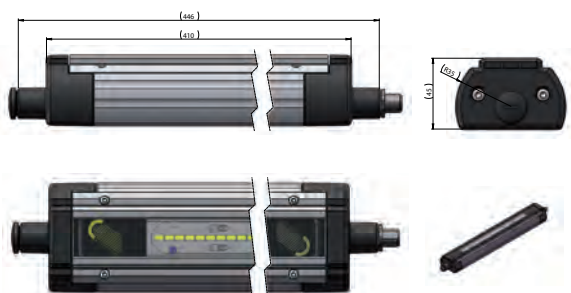

ACCESSORIES
OPTIONAL

Plug connection M12

24 V / DC
Item no.: 213-080-040

230 V / AC
Item no.: 213-080-046