

Genesys™

Programmable DC Power Supplies

10/15kW in 3U

Built in RS-232 & RS-485 Interface

Advanced Parallel Standard

Optional Interfaces:

IEEE488.2 SCPI (GPIB)

Isolated Analog Programming

LXI Compliant LAN



Genesys™ Family

GEN H 750W Half Rack

GEN 1U 750/1500W Full Rack

GEN 2U 3.3/5kW


GEN 3U 10/15kW

TDK-Lambda

www.us.tdk-lambda.com/hp

The Genesys™ family of programmable power supplies sets a new standard for flexible, reliable, AC/DC power systems in OEM, Industrial and Laboratory applications.

Features include:

- High Power Density 10/15kW in 3U
- High Current up to 1,000ADC
- Wide Range of popular worldwide 3Φ AC inputs, (208VAC, 400VAC, 480VAC)
- Power Factor 0.88 (Passive Correction on all Inputs)
- Output Voltage up to 600V, Current up to 1,000A
- Built-in RS-232/RS-485 Interface Standard
- Last Setting Memory; Front Panel Lockout
- Advanced Parallel reports total current up to four identical units
- Global Commands for Serial RS-232/RS-485 Interface
- Reliable Encoders for Voltage and Current Adjustment
- Independent Remote ON/OFF and Remote ENABLE/DISABLE
- Reliable Modular and SMT Design
- 19" Rack Mounted for ATE and OEM Applications, zero stack
- Optional Interfaces
 - Isolated Analog Programming and Monitoring Interface (0-5V/0-10V & 4-20mA)
 - IEEE 488.2 SCPI (GPIB) Multi-Drop
 -  Compliant LAN
- LabView™ and LabWindows™ drivers
- Five Year Warranty
- Worldwide Safety Agency Approvals; UL Recognized and CE Mark for LVD and EMC Regulation (208VAC and 400VAC Input)

Applications



Genesys™ power supplies are designed for demanding applications.

Test & Measurement systems using GPIB control save significant costs by incorporating the optional IEEE Multi-Drop Interface (IEMD) in the Master. Then up to 30 Slaves may be used with the standard RS-485 Multi-Drop (MD) interface.

Automated System designers will appreciate new, standard, remote programming features such as Global commands. Also, new high-speed status monitoring is available for the RS-485 bus as well as optional LAN (LXI compliant) Interface.

Industrial & Military high power systems can be configured with up to four identical units in parallel, up to 60kW. No space is required above or below each power supply (zero stack). The Master can be configured by the user to report total current of the combination. Applications include Heaters, Magnets and Laser Diodes.


Aerospace & Satellite Testing systems use the complete Genesys™ Family: 1U 750W Half Rack, 1U 750W or 1500W Full-Rack, 2U 3.3kW or 5kW and 3U 10/15kW. All are identical in Front Panel, Rear Panel Analog and Digital Interface Commands. A wide variety of outputs allows testing of many different devices.

Component Device Testing is simplified because of the many user-friendly control options in analog and digital interfaces. Lamps, capacitors, motors and actuators are typical devices tested.

Medical Imaging and Treatment systems require reliable power. Modular construction, SMT and thoroughly proven designs assure continuous performance at full rated power.

Semiconductor Processing & Burn-in equipment designers appreciate the wide variety of worldwide Inputs and Outputs from which to select depending on application. Selectable Safe and Auto Re-start protects loads and process integrity. Typical applications include Magnets, Filaments and Heaters.


Front Panel Description

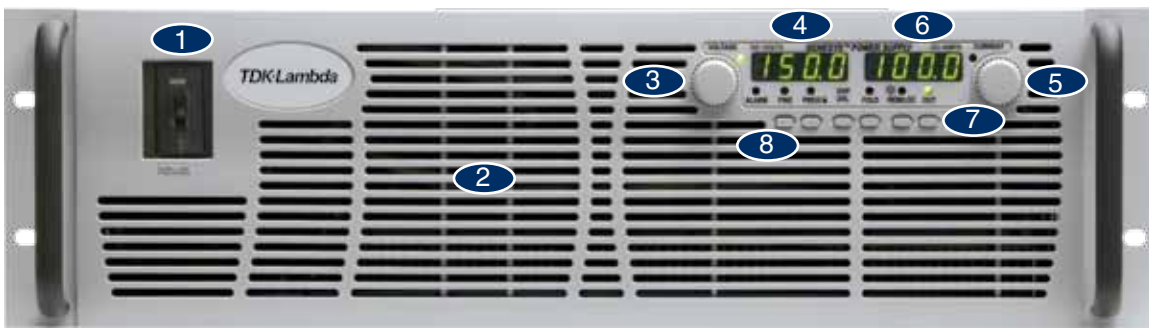

1. ON/OFF Switch
2. Air Intake allows zero stacking for maximum system flexibility and power density.
3. Reliable encoder controls Output Voltage, Address, OVP and UVL settings.
4. Volt Display shows Output Voltage and directly displays OVP, UVL and Address settings.
5. Reliable encoder controls Output Current, sets Baud rate and Advanced Parallel mode.
6. Current Display shows Output Current and displays Baud rate. Displays total current in Parallel Master/Slave Mode
7. Function/Status LEDs:

● Alarm	● Fine Control	● Preview Settings
● Foldback Mode	● Remote Mode	● Output On
8. Pushbuttons allow flexible user configuration
 - Coarse and Fine adjustment of Output Voltage/Current and Advanced Parallel Master or Slave select
 - Preview settings and set Voltage/Current with Output OFF, Front Panel Lock
 - Parallel Master/Slave
 - Set OVP and UVL Limits
 - Set Current Foldback Protection
 - Go to Local Mode and select Address and Baud rate
 - Output ON/OFF and Auto/Safe Re-Start Mode

Rear Panel Description

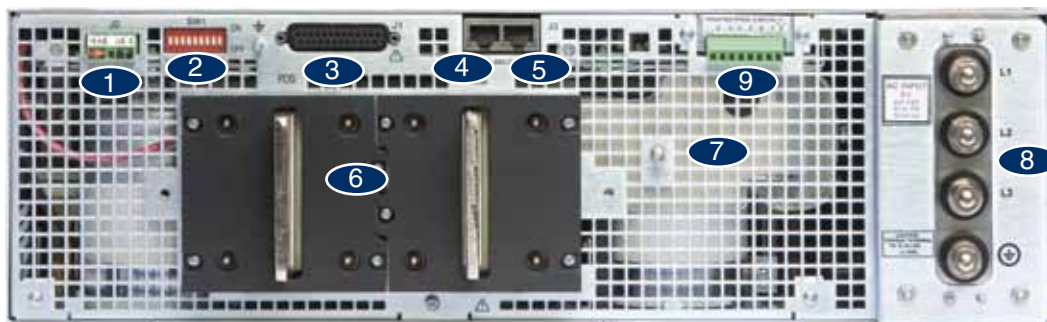

1. Remote/Local Output Voltage Sense Connections.
2. DIP Switches select 0-5V or 0-10V Programming and other functions.
3. DB25 (Female) connector allows (Non-isolated) Analog Program and Monitor and other functions.
4. RS-485 OUT to other Genesys™ Power Supplies.
5. RS-232/RS-485 IN Remote Serial Programming.
6. Output Connections: Rugged 2 hole busbars (shown) for up to 30V Output, single hole busbars 40 to 300V Output, threaded stud terminals above 300V Output
7. Exit air assures reliable operation when zero stacked.
8. Input Terminals L1, L2, L3, Ground, threaded studs.
9. Optional Interface Position for IEEE 488.2 SCPI, Isolated Analog, or LAN Interface.

LAN Interface complies with *LXI* Class C Specification

Genesys™ 3U 10/15kW Specifications

Genesys 30 10/15kW Specifications											10kW	15kW		
1.0 MODEL		GEN	7.5-1000	10-1000	12.5-800	20-500	25-400	30-333	40-250	50-200	60-167	X		
1.Rated Output Voltage		V	7.5	10	12.5	20	25	30	40	50	60	X		
2.Rated Output Current		A	1000	1000	800	500	400	333	250	200	167	X		
3.Rated Output Power		kW	7.5	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	X		
4.Efficiency (min) at low line, 100% Rated Load		%	77	83								X		
1.0 MODEL		GEN									60-250		X	
1.Rated Output Voltage		V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60		X	
2.Rated Output Current		A									250		X	
3.Rated Output Power		kW									15.0		X	
4.Efficiency (min) at low line, 100% Rated Load		%									88		X	
1.1 CONSTANT VOLTAGE MODE		Contact Factory for other models												
1. Max. line regulation (0.1% Vo Max≤30V; 0.01%>30V)		mV	7.5	10	12.5	20	25	30	4	5	6	X	X	
2. Max. load regulation (0.1% Vo Max≤30V; 0.02%>30V)		mV	7.5	10	12.5	20	25	30	8	10	12	X	X	
3. Ripple r.m.s 5Hz-1MHz c.v (*1)		mV	20	20	20	20	20	20	20	20	20	X	X	
4. Output noise p-p(20MHz) c.v (*1)		mV	60	60	60	60	60	60	60	75	75	X	X	
5.Remote sense compensation/wire		V	1	1	1	1	1	1.5	2	3	3	X	X	
6. Temperature stability		---	±0.05% of Vo Rated Over 8 hours, after 30 minute warm up, constant Line, Load & Temperature									X	X	
7. Temperature coefficient		PPM/°C	200 (0.02% Vo Rated)/°C									X	X	
8. Up-prog. response time, 0~Vomax full-load		mS	100									X	X	
9. Up-prog. response time, 0~Vomax, no load		mS	50									X	X	
10. Transient response time (cv mode) (*2)		mS	Less than 3.									X	X	
1.2 CONSTANT CURRENT MODE														
1. Max. line regulation (0.1%Io Max≥333A; 0.05%<333A)		mA	1000	1000	800	500	400	333	125	100	83.5	X		
2. Max. load regulation (0.1%Io Max≥333A; 0.075%<333A)		mA	1000	1000	800	500	400	333	188	150	125	X		
1. Max. line regulation (0.1%Io Max≥333A; 0.05%<333A)		mA										125		X
2. Max. load regulation (0.1%Io Max≥333A; 0.075%<333A)		mA										188		X
3. Ripple r.m.s 5Hz-1MHz c.c		mA	5100	5100	2600	2600	1700	1700	100	60	67	X		
3. Ripple r.m.s 5Hz-1MHz c.c		mA										100		X
4. Temperature stability		---	±0.05% of Io Rated Over 8 hours, after 30 minute warm up, constant Line, Load & Temperature									X	X	
5. Temperature coefficient		PPM/°C	300 (0.03% Io Rated)/°C									X	X	
1.3 PROTECTIVE FUNCTIONS														
1. OCP		%	0-100									X	X	
2. OCP type		---	Constant current									X	X	
3. Foldback protection		---	Output shut down, manual reset by front panel OUT button.									X	X	
4. Foldback response time		S	Less than 1									X	X	
5. OVP type		---	Inverter shut-down, manual reset by On/Off recycle or by OUT button									X	X	
6. OVP programming accuracy		%	5% Full Scale									X	X	
7. OVP trip point		V	0.05 to (1.02-1.05) x Rated Output Voltage									X	X	
8. OVP response time		mS	Less than 10mS for Output to begin to drop.									X	X	
9. Max. OVP reset time		S	7 from Turn On.									X	X	
10. Over temperature protection		---	Shut down if internal temperature exceeds safe operating levels. (Latched in Safe Mode/ Unlatched in Auto Mode).									X	X	
11. Phase Loss Protection		---	Yes									X	X	
1.4 REMOTE ANALOG CONTROLS & SIGNALS														
1. Vout voltage programming		0-100%, 0-5V or 0-10V, user selectable. Accuracy & Linearity ±1% of Rated Vo.										X	X	
2. Iout voltage programming		0-100%, 0-5V or 0-10V, user selectable. Accuracy & Linearity ±1% of Rated Io.										X	X	
3. Vout resistor programming		0-100%, 0-5/10kohm full scale, user selectable. Accuracy & Linearity ±1% of Rated Vo.										X	X	
4. Iout resistor programming		0-100%, 0-5/10kohm full scale, user selectable. Accuracy & Linearity ±1% of Rated Io.										X	X	
5. On/Off control (rear panel)		By Voltage: 0.6V = Disable, 2-15V = enable (default) or dry contact, user selectable logic										X	X	
6. Output current monitor		0-5V or 0-10V, accuracy:±1%, user selectable										X	X	
7. Output voltage monitor		0-5V or 0-10V, accuracy:±1%, user selectable										X	X	
8. Power supply OK signal		Yes. TTL high-OK, 0V (500ohm impedance)-Fail										X	X	
9. CV/CC signal		CV: TTL high (4-5V) source 10mA, CC: TTL low (0-0.4V), sink current: 10mA.										X	X	
10. Enable/Disable		Dry contact. Open:off, Short: on. Max. voltage at Enable/Disable Contacts 6V.										X	X	
11. Remote/Local selection		Selects Remote or Local operation by Voltage: 0-0.6V/2-15V, <0.6V = Local 2-15V = Remote										X	X	
12. Remote/Local signal		Signals operating mode in use.										X	X	
1.5 FRONT PANEL														
1.Control functions		Vout/ Iout manual adjust by separate encoders (coarse and fine adjustment selectable). OVP/UVL manual adjust by Voltage Adjust encoder, Front Panel Lock/Unlock Address selection by Voltage Adjust encoder. No of addresses:31 AC On/Off, Output ON/OFF, Restart Modes (Auto/Safe), Foldback Control (CV to CC), Go to Local RS232/485 and IEEE488.2 selection by IEEE enable switch and DIP switch Baud rate selection: 1200, 2400, 4800, 9600 and 19,200, by current adjust encoder. Parallel Master Slave:Hx, where x = Slaves 0 up to four.										X	X	
												X	X	
												X	X	
												X	X	
												X	X	
2.Display		Voltage: 4 digits, Accuracy: 0.5% of rated output Voltage ±1 count. Current: 4 digits, Accuracy: 0.5% of rated output current ±1 count. Voltmeter displays Voltage at power supply (local mode) or at load (remote mode).										X	X	
												X	X	
3.Indications		ADDR., OVP/UVL, V/A, FOLD, REM./LOCAL, OUT ON/OFF, LFP/UFF, CC/CV: GREEN LED's. ALRM (OVP, OTP, FOLD, AC FAIL): RED LED										X	X	
1.6 DIGITAL PROGRAMMING & READBACK														
1. Vout programming accuracy		±0.5% of rated output voltage										X	X	
2. Iout programming accuracy		±0.5% of rated output current for units with Io<187.5; +/-0.7% of rated output current for Io ≥187.5										X	X	
3. Vout programming resolution		0.02% of full scale										X	X	
4. Iout programming resolution		0.04% of full scale										X	X	
5. Vout readback accuracy		0.1%+0.2% of rated output voltage										X	X	
6. Iout readback accuracy		0.1%+0.4% of rated output current										X	X	
7. Vout readback resolution		0.02% of full scale										X	X	
8. Iout readback resolution		0.02% of full scale										X	X	
9. OV Response time		20 mS maximum between output V exceeding IEEE Limit and supply inhibit turning on.										X	X	
10. Other Functions		Set Over-Voltage Limit, Set Local/Remote										X	X	
All specifications subject to change without notice.														

Genesys™ 3U 10/15kW Specifications

												10kW	15kW	
1.0 MODEL		GEN	80-125	100-100	125-80	150-66	200-50	250-40	300-33	400-25	500-20	600-17	X	
1.Rated Output Voltage		V	80	100	125	150	200	250	300	400	500	600	X	
2.Rated Output Current		A	125	100	80	66	50	40	33	25	20	17	X	
3.Rated Output Power		kW	10.0	10.0	10.0	9.9	10.0	10.0	9.9	10.0	10.0	10.2	X	
4.Efficiency (min) at low line, 100% Rated Load		%	83										X	
1.0 MODEL		GEN	80-187.5	100-150	125-120	150-100	200-75	250-60	300-50	400-37.5	500-30	600-25		X
1.Rated Output Voltage		V	80	100	125	150	200	250	300	400	500	600		X
2.Rated Output Current		A	187.5	150	120	100	75	60	50	37.5	30	25		X
3.Rated Output Power		kW	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0		X
4.Efficiency (min) at low line, 100% Rated Load		%	88											X
1.1 CONSTANT VOLTAGE MODE		Contact Factory for other models												
1. Max. line regulation (0.1% Vo Max≤30V; 0.01%>30V)		mV	8	10	12.5	15	20	25	30	40	50	60	X	X
2. Max. load regulation (0.1% Vo Max≤30V; 0.02%>30V)		mV	16	20	25	30	40	50	60	80	100	120	X	X
3. Ripple r.m.s 5Hz-1MHz c.v (*1)		mV	25	25	25	25	35	35	60	60	60	60	X	X
4. Output noise p-p(20MHz) c.v (*1)		mV	100	100	125	150	175	200	200	300	350	350	X	X
5.Remote sense compensation/wire		V	4	5	5	5	5	5	5	5	5	5	X	X
6. Temperature stability		---	±0.05% of Vo Rated Over 8 hours, after 30 minute warm up, constant Line, Load & Temperature										X	X
7. Temperature coefficient		PPM/°C	200 (0.02% Vo Rated)/°C										X	X
8. Up-prog. response time, 0-Vomax full-load		mS	100										X	X
9. Up-prog. response time, 0-Vomax, no load		mS	50										X	X
10. Transient response time (cv mode) (*2)		mS	Less than 3.										X	X
1.2 CONSTANT CURRENT MODE														
1. Max. line regulation (0.1%Io Max≥333A; 0.05%<333A)		mA	62.5	50	40	33	25	20	17	13	10	9	X	
2. Max. load regulation (0.1%Io Max≥333A; 0.075%<333A)		mA	94	75	60	50	38	30	25	19	15	13	X	
1. Max. line regulation (0.1%Io Max≥333A; 0.05%<333A)		mA	94	75	60	50	38	30	25	19	15	13		X
2. Max. load regulation (0.1%Io Max≥333A; 0.075%<333A)		mA	141	113	90	75	56	45	38	28	23	19		X
3. Ripple r.m.s 5Hz-1MHz c.c		mA	50	40	32	26	20	16	13	10	8	7	X	
3. Ripple r.m.s 5Hz-1MHz c.c		mA	100	100	50	50	20	20	20	10	10	10		X
4. Temperature stability		---	±0.05% of Io Rated Over 8 hours, after 30 minute warm up, constant Line, Load & Temperature										X	X
5. Temperature coefficient		PPM/°C	300 (0.03% Io Rated)/°C										X	X
1.3 PROTECTIVE FUNCTIONS														
1. OCP		%	0-100										X	X
2. OCP type		---	Constant current										X	X
3. Foldback protection		---	Output shut down, manual reset by front panel OUT button.										X	X
4. Foldback response time		S	Less than 1										X	X
5. OVP type		---	Inverter shut-down, manual reset by On/Off recycle or by OUT button										X	X
6. OVP programming accuracy		%	5% Full Scale										X	X
7. OVP trip point		V	0.05 to (1.02-1.05) x Rated Output Voltage										X	X
8. OVP response time		mS	Less than 10mS for Output to begin to drop.										X	X
9. Max. OVP reset time		S	7 from Turn On.										X	X
10. Over temperature protection		---	Shut down if internal temp. exceeds safe operating levels. (Latched in Safe Mode/ Unlatched in Auto Mode).										X	X
11. Phase Loss Protection		---	Yes										X	X
1.4 REMOTE ANALOG CONTROLS & SIGNALS														
1. Vout voltage programming		0-100%, 0-5V or 0-10V, user selectable. Accuracy & Linearity ±1% of Rated Vo.											X	X
2. Iout voltage programming		0-100%, 0-5V or 0-10V, user selectable. Accuracy & Linearity ±1% of Rated Io.											X	X
3. Vout resistor programming		0-100%, 0-5/10kohm full scale, user selectable. Accuracy & Linearity ±1% of Rated Vo.											X	X
4. Iout resistor programming		0-100%, 0-5/10kohm full scale, user selectable. Accuracy & Linearity ±1% of Rated Io.											X	X
5. On/Off control (rear panel)		By Voltage: 0.6V = Disable, 2-15V = enable (default) or dry contact, user selectable logic											X	X
6. Output current monitor		0-5V or 0-10V, accuracy:±1%, user selectable											X	X
7. Output voltage monitor		0-5V or 0-10V, accuracy:±1% , user selectable											X	X
8. Power supply OK signal		Yes. TTL high-OK, 0V (500ohm impedance)-Fail											X	X
9. CV/CC signal		CV: TTL high (4-5V) source 10mA, CC: TTL low (0-0.4V), sink current: 10mA.											X	X
10. Enable/Disable		Dry contact. Open:off, Short: on. Max. voltage at Enable/Disable Contacts 6V.											X	X
11. Remote/Local selection		Selects Remote or Local operation by Voltage: 0-0.6V/2-15V, <0.6V = Local 2-15V = Remote											X	X
12. Remote/Local signal		Signals operating mode in use.											X	X
1.5 FRONT PANEL														
1.Control functions		Vout/ Iout manual adjust by separate encoders (coarse and fine adjustment selectable). OVP/UVL manual adjust by Voltage Adjust encoder, Front Panel Lock/Unlock Address selection by Voltage Adjust encoder. No of addresses:31 AC ON/OFF, Output ON/OFF, Restart Modes (Auto/Safe), Foldback Control (CV to CC), Go to Local RS232/485 and IEEE488.2 selection by IEEE enable switch and DIP switch Baud rate selection: 1200, 2400, 4800, 9600 and 19,200, by current adjust encoder. Parallel Master Slave:Hx, where x = Slaves 0 up to four.											X	X
2.Display		Voltage: 4 digits, Accuracy: 0.5% of rated output Voltage ±1 count. Current: 4 digits, Accuracy: 0.5% of rated output current ±1 count. Voltmeter displays Voltage at power supply (local mode) or at load (remote mode).											X	X
3.Indications		ADDR., OVP/UVL, V/A, FOLD, REM./LOCAL, OUT ON/OFF, LFP/UFP, CC/CV: GREEN LED's. ALRM (OVP, OTP, FOLD, AC FAIL): RED LED											X	X
1.6 DIGITAL PROGRAMMING & READBACK														
1. Vout programming accuracy		±0.5% of rated output voltage											X	X
2. Iout programming accuracy		±0.5% of rated output current for units with Io<187.5; +/-0.7% of rated output current for Io ≥187.5											X	X
3. Vout programming resolution		0.02% of full scale											X	X
4. Iout programming resolution		0.04% of full scale											X	X
5. Vout readback accuracy		0.1%+0.2% of rated output voltage											X	X
6. Iout readback accuracy		0.1%+0.4% of rated output current											X	X
7. Vout readback resolution		0.02% of full scale											X	X
8. Iout readback resolution		0.02% of full scale											X	X
9. OV Response time		20 mS maximum between output V exceeding OVP Limit and supply inhibit turning on.											X	X
10. Other Functions		Set Over-Voltage Limit, Set Local/Remote											X	X

*1. Ripple and Noise at Full Rated Voltage & Load at 25C, Nominal Line. Per EIJ R9002A

*2. Time for the rated output voltage to recover within 2% for a load change of 50-100% or 100-50% of rated output.

General Specifications 3U Genesys™ 10/15kW

2.1 INPUT CHARACTERISTICS		
1. Input voltage/freq.(range)	---	208VAC (180-253); 400VAC (360-440); 480VAC (432-528), all 47-63Hz.
2. No. of phases	---	3 Phase (Wye or Delta) 4 wire total (3 Phase and 1 protective earth ground)
3. Dropout voltage	V	180/360/432
4. Input current 180/360/432Vac	A	10kW - 45/23/20; 15kW - 64/32/27 All at full rated output power.
5. Inrush current	A	Not to exceed full rated Input current See Para. above
6. Power Factor	---	0.88 Passive
7. Leakage Current	mA	3.5 (EN60950) max.
8. Input Protection	---	208 VAC Circuit Breaker; 400VAC, 480VAC - Line Fuse
9. Input Overvoltage Protection		Unit shall not be damaged by line overvoltage with max. duration of 100uSec. Up to 120% of nominal AC input voltage.
10. Phase Imbalance	%	≤5% on Three Phase Input
2.2 POWER SUPPLY CONFIGURATION		
1. Parallel Operation	Up to Four (4) identical units may be connected in Master/Slave Mode with single wire connection. In Advanced parallel feature, the current of Master Unit, multiplied by number of units connected in parallel, is made available on digital interface and displayed on front panel of Master unit. Remote analog current monitor of the Master is scaled to output current of the Master unit (only).	
2. Series Operation	Possible (with external diodes), up to two identical units with total output not to exceed +/-600V from chassis ground.	
2.3 ENVIRONMENTAL CONDITIONS		
1. Operating temperature	0-50°C, 100% load.	
2. Storage temperature	-20-70°C	
3. Operating humidity	20-80% RH (non-condensing).	
4. Storage humidity	10-90% RH (non-condensing).	
5. Vibration & Shock	ASTM D4169, Standard Practice for Performance Testing of Shipping Containers and Systems, Shipping Unit: Single Package Assurance Level: Level II; Acceptance Criteria: Criterion 1 - No product damage Criterion 2 - Packaging is intact, Distribution Cycle: 12 - Air (intercity) and motor freight (local), unitized is used	
6. Altitude	Operating:50°C up to 7500 ft. (2500m), 45°C from 7501 to 10,000ft (2501m - 3000m), Non Operating 40,000 ft (12,000m)	
7. Audible Noise	65dBA at Full Load, measured 1m from Front Panel	
2.4 EMC		
1. 208 Volt Input Models	CE Mark	
1. ESD	EN61000-4-2 (IEC 801-2) Air-disch.+/-8kV , contact disch.+/-4kV	
2. Fast transients	EN61000-4-4 (IEC 1000-4-3)	
3. Surge immunity	EN61000-4-5 (IEC 1000-4-5)	
4. Conducted immunity	EN61000-4-6 (IEC 1000-4-6)	
5. Radiated immunity	EN61000-4-3 (IEC 1000-4-3)	
6. Power Frequency Magnetic Field	EN61000-4-8	
7. Conducted emission	EN55011A, FCC part 15J-A	
8. Radiated emission	EN55011A, FCC part 15J-A	
2. 400 Volt Input Models	CE Mark	
1. ESD	EN61000-4-2 (IEC 801-2) Air-disch.+/-8kV , contact disch.+/-4kV	
2. Fast transients	EN61000-4-4 (IEC 1000-4-3)	
3. Surge immunity	EN61000-4-5 (IEC 1000-4-5)	
4. Conducted immunity	EN61000-4-6 (IEC 1000-4-6)	
5. Radiated immunity	EN61000-4-3 (IEC 1000-4-3)	
6. Power Frequency Magnetic Field	EN61000-4-8	
7. Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests (400VAC Only).	IEC 61000-4-11	
8. Conducted emission	EN55011A, FCC part 15J-A	
9. Radiated emission	EN55011A, FCC part 15J-A	
2.5 SAFETY		
1.Applicable standards:	UL/CUL 60950-1, EN60950-1 recognized. Vout=≤40V: Output is SELV, IEEE/Isolated Analog/LAN/USB are SELV 40<Vout=≤400V: Output is hazardous; IEEE/Isolated Analog/LAN/USB are SELV 400<Vout=≤600V: Output is hazardous; IEEE/Isolated Analog/LAN/USB are not SELV, CE Mark 208 & 400VAC Inputs only (CB Scheme)	
2. Withstand Voltage	Vout =≤60V models :Input-Ground: 2818VDC 1 min, Input-Outputs (SELV): 4242VDC 1min, Output -Ground: 1000VDC 1min. 60<Vout =≤300V models: Input-Ground: 2828VDC 1 min, Input-Haz. Output: 3535VDC 1min, Input-SELV: 2828V DC 1min. Hazardous Output.-SELV: 2121VDC 1min, Hazardous Output-Ground: 2121VDC 1min. 300<Vout =≤600V models: Input-Ground: 2828VDC 1 min, Input-Haz. Output: 3535 1min, Input-SELV: 2828VDC 1min. Hazardous Output.-SELV: 2688VDC 1min, Hazardous Output-Ground:2688VDC 1 min	
3.Insulation resistance	100Mohm at 500Vdc	
2.6 MECHANICAL CONSTRUCTION		
1. Cooling	Fan driven, Airflow from Front to Rear. Supplemental vents on side that shall not be blocked. EIA Rack mounting, stackable. "Zero Stackable" top and bottom. Slides or suitable rear support required.	
2. Dimensions (WxHxD)	W: 429mm / 16.9"; H:3U - 133mm / 5.22"; D - 564mm / 22.2", excluding connectors, encoders, handles, etc.	
3. Weight	43kg. / 97lbs	
4. AC Input connector (with Protective Cover)	3 x M6 x 1" Threaded Studs and terminal cover. Strain relief optional.	
5.Output connectors	Up to and including 300V Models: bus-bars. Greater than 300V Models: threaded stud terminals	
6.Control connectors	Analog programming: DB25, plastic connector, AMP747461-5, Female on Supply, Male on Mating connector 747321. Std 25 pin D connector.	
7. Mounting method	Standard 19" Rack Mount, provision for standard slides. Side/Rear Support is required; do not mount by F/P only.	
8. Output ground connection	M5 Stud	
2.7 WARRANTY		
1. Warranty	5 years.	

*1. Ripple and Noise at Full Rated Voltage & Load at 25°C, Nominal Line. Per IJ R9002A

*2. Time for the rated output voltage to recover within 2% for a load change of 50~100% or 100~50% of rated output.

All specifications subject to change without notice.



Genesys™ Power Parallel and Series Configurations

Parallel operation - Master/Slave:

Active current sharing allows up to four identical units to be connected in an auto-parallel configuration for four times the output power. In Advanced Parallel Master/Slave Mode, total current is programmed and reported by the Master, Up to four supplies act as one.





Series operation

Up to two units may be connected in series to increase the output voltage or to provide bipolar output. (Max 600V to Chassis Ground).

Remote Programming via RS-232 & RS-485 Interface

Standard Serial Interface allows daisy-chain control of up to 31 power supplies on the same communication bus with built-in RS-232 & RS-485 Interface.

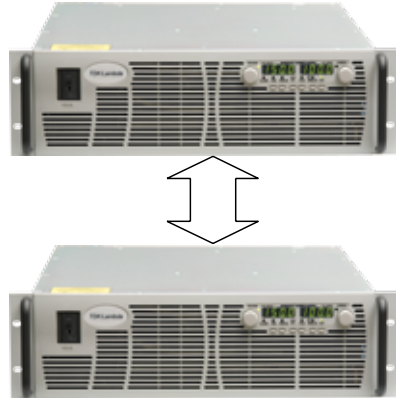

Programming Options (Factory installed)

IEEE Multi-Drop Interface

- Allows IEEE Master to control up to 30 (Standard) slaves over RS-485 daisy-chain
- Only the Master needs be equipped with IEEE Interface
- IEEE 488.2 SCPI Compliant
- Program Voltage
- Measure Voltage
- Over Voltage setting and shutdown
- Error and Status Messages
- Program Current
- Measure Current
- Current Foldback shutdown

P/N: IEMD

Multi-Drop Slave Option is Standard

- Standard Units are equipped with the MD Slave (RS-485) function

P/N: N/A

Isolated Analog Programming

- Four Channels to Program and Monitor Voltage and Current.
- Isolation allows operation with floating references in harsh electrical environments.
- Choose between programming with Voltage or Current.
- Connection via removable terminal block: Phoenix MC1,5/8-ST-3.81.
- Voltage Programming, user-selectable 0-5V or 0-10V signal.
 - Power supply Voltage and Current Programming Accuracy $\pm 1\%$
 - Power supply Voltage and Current Monitoring Accuracy $\pm 1.5\%$
- Current Programming with 4-20mA signal.
 - Power supply Voltage and Current Programming Accuracy $\pm 1\%$
 - Power supply Voltage and Current Monitoring Accuracy $\pm 1.5\%$

P/N: IS510

P/N: IS420



LAN Interface

LXI Compliant to Class C

- Meets all LXI-C Requirements
- Address Viewable on Front Panel
- Fixed and Dynamic Addressing
- Fast Startup
- VISA & SCPI Compatible
- LAN Fault Indicators
- Auto-detects LAN Cross-over Cable
- Compatible with most standard Networks

P/N: LAN

Outline Drawings Genesys™ GEN 10/15kW 3U

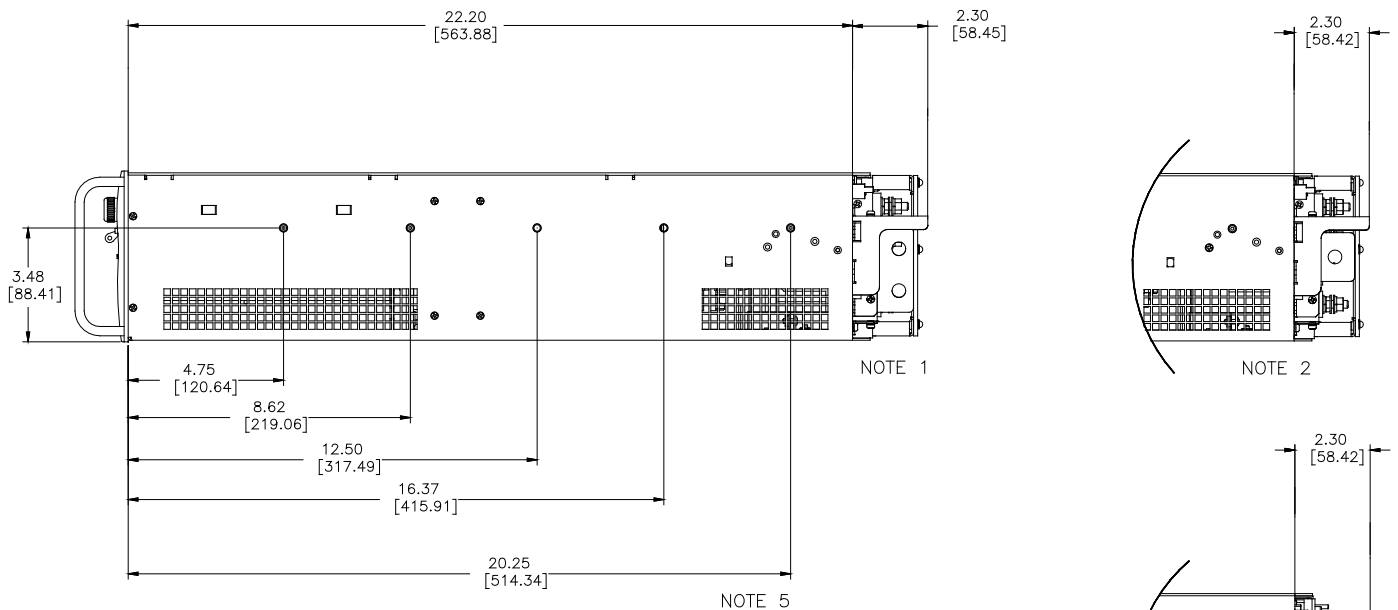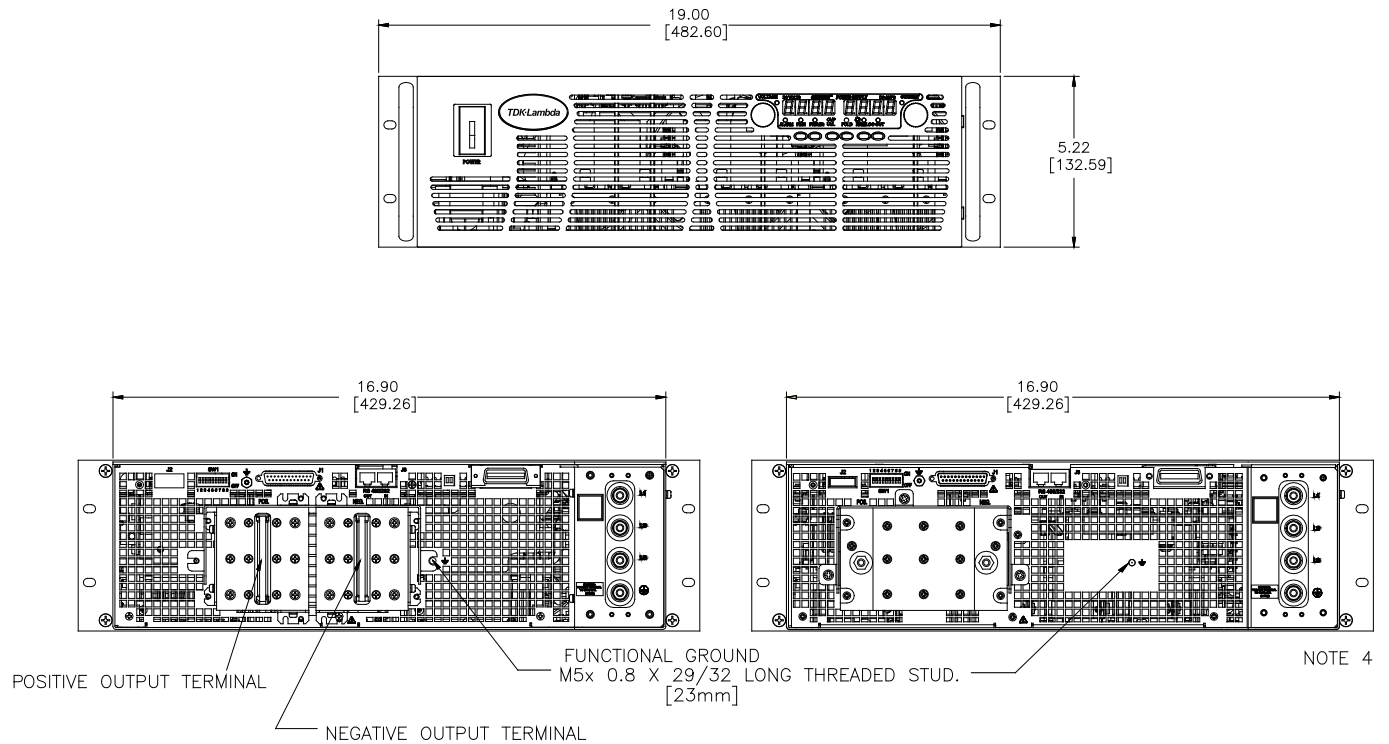

NOTES:

1. Bus bars for models up to 30VDC Output two holes 0.42" Dia (10.72mm)
2. Bus bars for models 40-300VDC Output one hole 0.42" Dia (10.72mm)
3. For models above 300V Output threaded stud terminal
4. Input Terminals M6x1 (3 + GND)
5. Mounting for Slide Mounts (not included).
Recommend General Devices, Chassis Trak P/N C230-S-122.
Secure with pan head screw M5x0.8-8mm long MAX.

Power Supply Identification / Accessories

How to order

GEN	10	- 1000	-	-	-
Series Name	Output Voltage (0~10V)	Output Current (0~1000A)	Factory Options Option:	IEMD IS510 IS420 LAN	AC Input Options 3P208 (Three Phase 208VAC) 3P400 (Three Phase 400VAC) 3P480 (Three Phase 480VAC)

Models 10/15kW

Model	Output Voltage (VDC)	Output Current (A)	Output Power (kW)
GEN 7.5-1000	0~7.5	0~1000	7.5
GEN 10-1000	0~10	0~1000	10
GEN 12.5-800	0~12.5	0~800	10
GEN 20-500	0~20	0~500	10
GEN 25-400	0~25	0~400	10
GEN 30-333	0~30	0~333	10
GEN 40-250	0~40	0~250	10
GEN 50-200	0~50	0~200	10
GEN 60-167	0~60	0~167	10
GEN 60-250		0~250	15
GEN 80-125	0~80	0~125	10
GEN 80-187.5		0~187.5	15
GEN 100-100	0~100	0~100	10
GEN 100-150		0~150	15
GEN 125-80	0~125	0~80	10
GEN 125-120		0~120	15

Model	Output Voltage (VDC)	Output Current (A)	Output Power (kW)
GEN 150-66	0~150	0~66	10
GEN 150-100		0~100	15
GEN 200-50	0~200	0~50	10
GEN 200-75		0~75	15
GEN 250-40	0~250	0~40	10
GEN 250-60		0~60	15
GEN 300-33	0~300	0~33	10
GEN 300-50		0~50	15
GEN 400-25	0~400	0~25	10
GEN 400-37.5		0~37.5	15
GEN 500-20	0~500	0~20	10
GEN 500-30		0~30	15
GEN 600-17	0~600	0~17	10
GEN 600-25		0~25	15

Factory options

RS-232/RS-485 Interface built-in Standard
 GPIB (Multi-Drop Master) Interface
 Multi-Drop Slave Interface
 Voltage Programming Isolated Analog Interface
 Current Programming Isolated Analog Interface
 LAN Interface (Complies with **LXI** Class C)

P/N

-
 IEMD
 Standard
 IS510
 IS420
 LAN

Accessories

1. Serial Communication cable

RS-232/RS-485 cable is used to connect the power supply to the Host PC.

Mode	RS-485	RS-232	RS-232
PC Connector	DB-9F	DB-9F	DB-25F
Communication Cable	Shield Ground L=2m	Shield Ground L=2m	Shield Ground L=2m
Power Supply Connector	EIA/TIA-568A (RJ-45)	EIA/TIA-568A (RJ-45)	EIA/TIA-568A (RJ-45)
P/N	GEN/485-9	GEN/232-9	GEN/232-25

2. Serial link cable*

Daisy-chain up to 31 Genesys™ power supplies.

Mode	Power Supply Connector	Communication Cable	P/N
RS-485	EIA/TIA-568A (RJ-45)	Shield Ground L=50cm	GEN/RJ45

* Included with power supply

USA

TDK-Lambda Americas Inc.
405 Essex Rd. Neptune, NJ 07753
Tel: +1-732-922-9300 Fax: +1-732-922-1441
E-mail: sales@us.tdk-lambda.com
www.us.tdk-lambda.com/hp

CANADA

ACA TMetrix
5805 Kennedy Road, Mississauga, Ontario, L4Z 2G3
Tel: +1-800-665-7301 Fax: +1-905-890-1959
Email: lambda@aca.ca
tmetrix.com

MEXICO

AcMax de Mexico
39 Poniente 3515 Piso 5 Col. Las Animas
Puebla, Pue. C.P. 72400
Tel: 01-800-211-0060 / (222) 891-8484 Fax: 222-264-1445
Email: info@acmax.mx, Web: www.acmax.mx

BRAZIL

Suplitech
Rua Sena Madureira 455, Belo Hte - 31340-000
Tel: +55-31-3498 1177 Fax: +55-31-3441 0841
www.suplitech.com.br

UK

TDK-Lambda UK
Kingsley Avenue
Ilfracombe, Devon EX 34 8ES
Tel: +44-1271-856666 Fax: +44-1271-864894
E-mail: powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com

IRELAND

FRANCE

TDK-Lambda France
ZAC des Delaches, CS 41077
9 rue Thuilliere, 91978 Villebon Courtaboeuf
Tel: +33 1 60 12 71 65 Fax: +33 1 60 12 71 66
www.fr.tdk-lambda.com

NETHERLANDS

SPAIN

GERMANY

TDK-Lambda Germany
Karl-Bold-Str.40, D-77855 Achern
Tel: +49-7841-666-0 Fax: +49-7841-500-0
E-mail: info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com

AUSTRIA

SWITZERLAND

ITALY

TDK-Lambda Italy
Via dei Lavoratori 128/130
IT 20092 Cinisello Balsamo (MI)
Tel: +39-02-6129-3863 Fax: +39-02-6129-0900
E-mail: info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com

SCANDINAVIA

BALTICS

TDK-Lambda Germany
Karl-Bold-Str.40, D-77855 Achern
Tel: +49-7841-666-0 Fax: +49-7841-500-0
E-mail: info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com

JAPAN

TDK-Lambda Corporation
International Sales Division,
3-9-1, Shibaura, Minato-ku,
Tokyo 108-0023
Tel: +81 3-6852-7136 Fax: +81 3-6852-7148
E-mail: t.morimoto@jp.tdk-lambda.com
www.jp.tdk-lambda.com

CHINA

TDK-Lambda Shanghai Office
28F, Xingyuan Technology Building No.418, Guiping Road,
Shanghai, 200233 P.R. CHINA
Tel: +86-21-6485-0777 Fax: +86-21-6485-0666
www.cn.tdk-lambda.com

TDK-Lambda Beijing Office
Room 12B11-12B12, Unit 7 DACHENG SQUARE,
No.28 Xuanwumenxi Street, Xuanwu District Beijing,
100053, P.R. CHINA
Tel: +86-10-6310-4872 Fax: +86-10-6310-4874
www.cn.tdk-lambda.com

TDK-Lambda Hong Kong Office
1 / F. SAE Technology Centre, 6 science Park East Avenue,
HongKong Science Park, Shatin, NT.,
Tel: +852-23766658 Fax: +852-23172150
www.cn.tdk-lambda.com

KOREA

TDK-Lambda Corporation
6F Songok Bldg. 4-1 Soonae-Dong
Pundang-Gu, Songnam-Shi Kyonggi-Do, 463-020
Tel: +82-2-556-1171 Fax: +82-2-555-2706
www.tdk-lambda.co.kr

MALAYSIA

TDK-Lambda Malaysia
Lot 709, Nilai Industrial Estate
71800 Nilai, Negeri Sembilan
Tel: +60-6-799-1130 Fax: +60-6-799-3277
www.my.tdk-lambda.com

SINGAPORE

TDK-Lambda Singapore
1008 Toa Payoh North # 06-01/08
Singapore 318996
Tel: +65-6251-7211 Fax: +65-6250-9171
www.sg.tdk-lambda.com

PHILIPPINES

THAILAND

INDIA

TDK-Lambda India
#526, Ground Floor, 10th Main, 7th Cross,
Jeevanbhimannagar, Bangalore 560 075,
Karnataka, India
Tel : +91-80-43550500 Fax : +91-80-43550501
www.in.tdk-lambda.com

ISRAEL

RUSSIA

TDK-Lambda Ltd. Israel
Kibbutz Givat Hashlosha Tel-Aviv 48800
Tel: +972-3-9024-333 Fax: +972-3-9024-777
E-mail: info@tdk-lambda.co.il
www.tdk-lambda.co.il



TDK-Lambda Americas Inc. 405 Essex Road, Neptune, NJ 07753 USA
Tel: +1 732 922 9300 Fax: +1 732 922 1441
www.us.tdk-lambda.com/hp