


Specifications

Maximum maintain or continuous exposure temperature (power on)	110°C
Temperature classification	T4 in accordance with European Standard EN 60079-30-1 5.1.13
Minimum installation temperature	-60°C
Minimum bend radius	at 20°C: 13 mm at -60°C: 35 mm

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

A 20QTVR2-CT
B 15QTVR2-CT
C 10QTVR2-CT

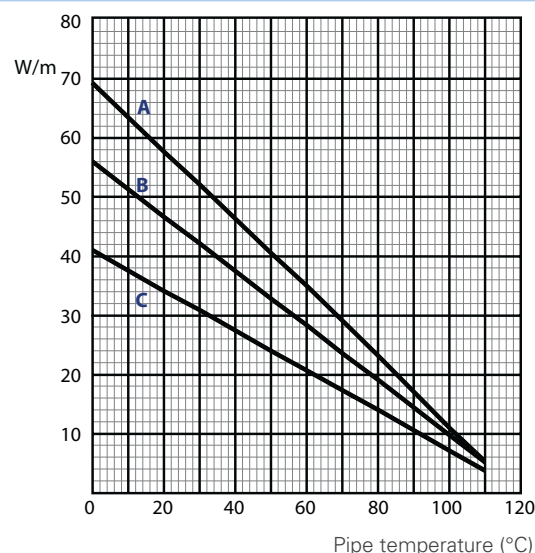

	10QTVR2-CT	15QTVR2-CT	20QTVR2-CT
Nominal power output (W/m at 10°C)	38	51	64
Product dimensions (nominal) and weight			
Thickness (mm)	4.5	4.5	5.1
Width (mm)	11.8	11.8	14.0
Weight (g/m)	126	126	180

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

Electrical protection sizing	Start-up temperature	Maximum heating cable length per circuit (m)		
25 A	-20°C	95	75	60
	+10°C	115	95	75
32 A	-20°C	115	100	75
	+10°C	115	100	95
40 A	-20°C	115	100	95
	+10°C	115	100	115

The above numbers are for circuit length estimation only. For more detailed information please use the Tyco Thermal Controls TraceCalc software or contact your local Tyco Thermal Controls representative.

Tyco Thermal Controls requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Ordering details

Part description	10QTVR2-CT	15QTVR2-CT	20QTVR2-CT
Part No.	391991-000	040615-000	988967-000

Components

Tyco Thermal Controls offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.

Self-regulating heating cable




Electrical heat-tracing for process temperature maintenance applications up to 120°C which may be subject to steam cleaning.

The XTV family of self-regulating, parallel circuit heating cables is used for process temperature maintenance of pipes and vessels.

It can also be used for frost protection of large pipes and for applications requiring high temperature exposure capability.

Heating cable construction

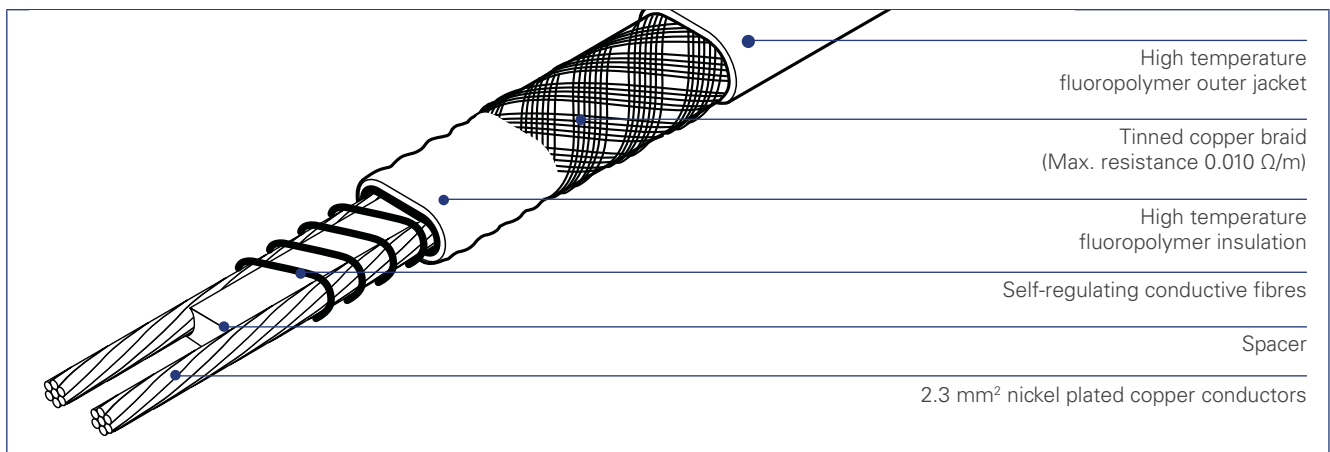

Application

Area classification	Hazardous, Zone 1, Zone 2 (Gas), Zone 21, Zone 22 (Dust)
	Ordinary
Traced surface type	Carbon steel
	Stainless steel
	Painted or unpainted metal
Chemical resistance	Organics and corrosives
	For aggressive organics and corrosives consult your local Tyco Thermal Controls representative

Supply voltage

230 Vac (Contact your local Tyco Thermal Controls representative for data on other voltages)

Approvals

The XTV heating cables are approved for use in hazardous areas by PTB and Baseefa Ltd.
 PTB 09 ATEX 1118 X & Baseefa06ATEX0184X
 Ex II 2G Ex e II T* & Ex II 2D Ex tD A21 IP66 T*
 IECEx PTB 09.0059X & IECEx BAS 06.0044X
 Ex II 2G Ex e II T* & Ex II 2D Ex tD A21 IP66 T*
 *See approval schedule

The XTV heating cables are approved by DNV for use on ships and mobile offshore units.
 DNV Certificate No. E-8934

The products also have the required approvals for use in Kazakhstan, Russia and many other countries. Contact your local Tyco Thermal Controls representative for more details.