



Position switch Extreme with safety function

ES 41 H 1Ö/1S +180°C Extreme

Material number: 1046303 (Material number old: 41013906)

Features/Options


- Metal enclosure
- Change-over contact with double break
- 3 cable entries M16 x 1.5

Note

- When used as safety switch, secure the enclosure against slipping with appropriate means, e.g. pinning.

- Heat-resistant up to +180 °C
- Locking screws, brass nickel-plated

Dimensions

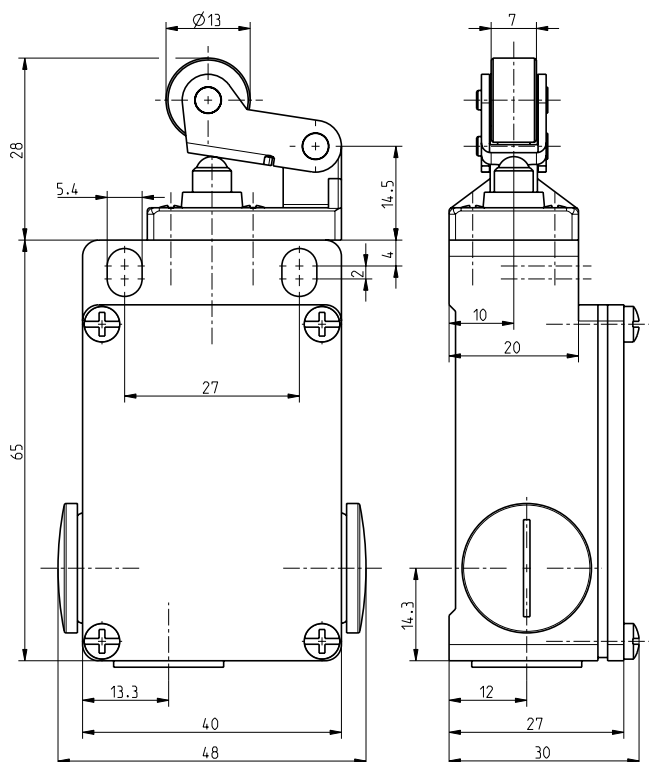

Technical data

Standards

EN ISO 13849-1; EN 60947-5-1; EN ISO 14119

Enclosure

aluminium die-cast, powder-coated
steel, powder-coated
type 1

Cover

Switch type

Coding level

Degree of protection

Contact material

Switching system

no coding

IP 65 to IEC/EN 60529

silver

slow action, positive break NC

contacts ⊖

Switching elements

Connection

Cable cross-section

1 NC/1 NO contact, type Za

screw connection terminals

max. 2.5 mm² (incl. conductor ferrules)

Cable entry

B_{10d} (10 % Load)

T_M

U_{imp}

U_i

I_{the}

Utilisation category

I_e/U_e

Max. fuse rating

Mechanical life

Operation cycles

Ambient temperature

Approvals

3 x M16 x 1.5

2 million

max. 20 years

4 kV

400 V

6 A

AC-15

6 A/400 VAC

6 A gG/gN fuse

> 1 million operations

1800/h

max. -20 °C ... +180 °C




Weight

180 g

Errors and omissions excepted.

Contact diagram





Position switch Extreme with safety function

ES 41 H 1Ö/1S +180°C Extreme

Material number: 1046303 (Material number old: 41013906)

Switching diagram

