




Description:

Powder Coated Aluminium Switchbox to IP67 fitted with 2 x SPDT switches for indication of fully open and fully closed positions.
 Solid and compact design with high visibility beacon indicator.
 Captive cover bolts are safely retained during installation and maintenance.
 The spring loaded splined cams are easily adjustable with no tools required.
 Dual cable entries are provided.
 The switchbox is mounted to the actuator using a NAMUR standard stainless steel mounting bracket.

Standard Specification:

Enclosure Material	:	Die Cast Aluminium
Enclosure Rating	:	IP67
Enclosure Finish	:	Polyester powder coating (Black)
Shaft Material	:	Stainless Steel
Cable Entries	:	2 x M20 (Options PG13.5 & 1/2"NPT)
Limit Switch Type	:	2 x SPDT, Mechanical
Voltage/Amps	:	250V AC/16A, 125V AC/16A, 250VDC/0.3A, 125VDC/0.6A, 30VDC/10A
Ambient Temperature	:	-20° to +80° C

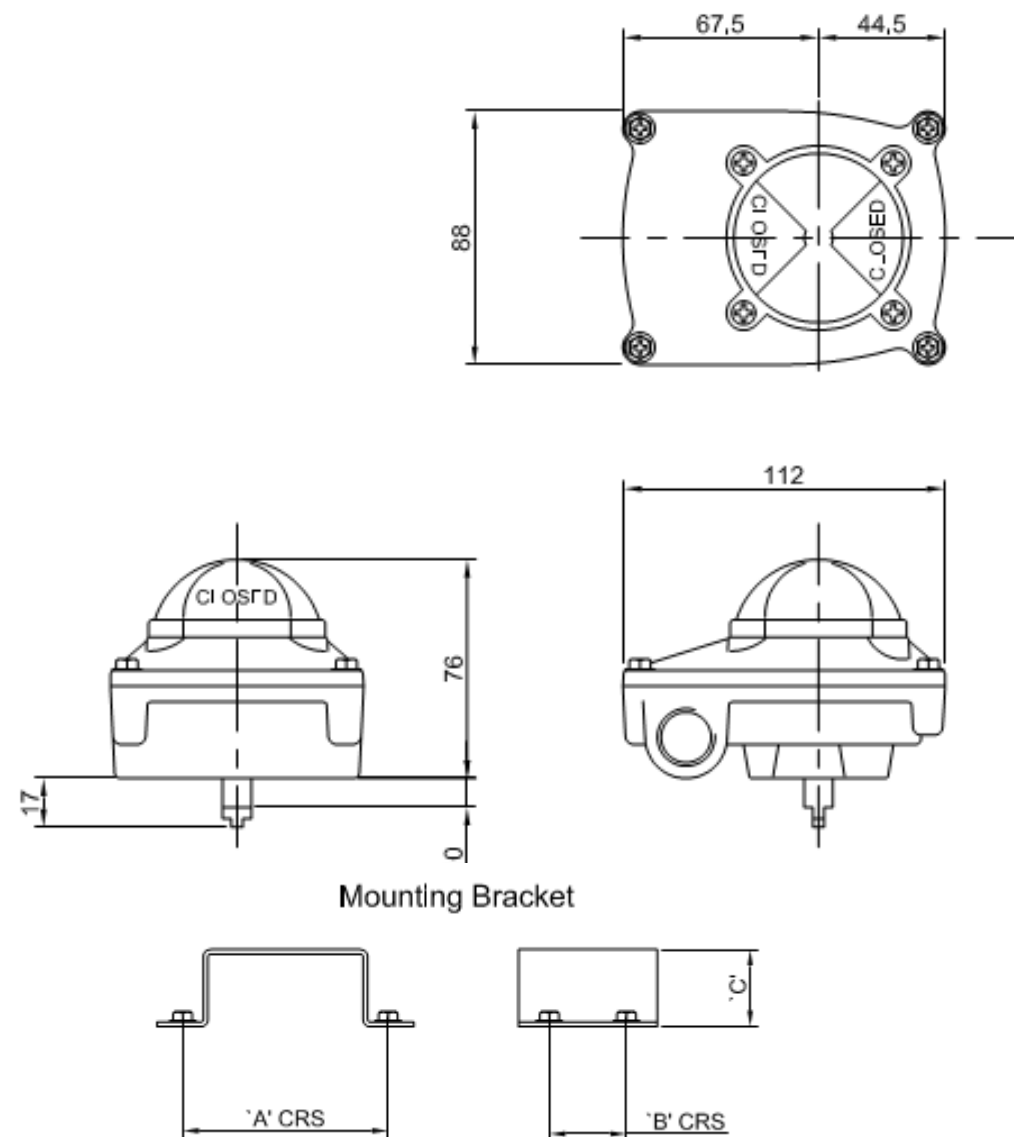

Options

Enclosure Rating	IP68
Enclosure Finish	Various Colours
Proximity Sensors	See Data Sheets
Beacon Indicator	3 Way Indication
ATEX Eexd I.S Versions	See Data Sheets

Bracket Details

Bracket	A	B	C	Application
MBP-100	80	30	30	80 x 30 x20
MBP-200	80	30	40	80 x 30 x30
MBP-300	130	30	40	130 x 30 x30
MBP-400	130	30	60	130 x 30 x30

