

# LR 100L TS58 J

## Remote Sensors

Standard, Remote Photoelectric Systems

### Compatible Transmitter:

LT 100L TS58 J



Product Data	
Function:	Receiver
Housing Material:	Stainless Steel
Housing:	M12 x 1
Connection:	4 pin, M12 plug
Sensing Range:	Up to 18 m
Optical Angle:	+/- 7° (opening)
Indicators:	Yes

Technical Data	
Photo Transistor:	Silicon NPN
Power On Indicator:	Green LED
Output Indicator:	-
Light Source:	-
Cable:	-
Housing Material Sensor Housing:	Stainless Steel (AISI 316)
Housing Material Lens Cover:	Polycarbonate
Transmitter Diode:	-
Cable Sleeve:	-
Min. Cable Bending Radius:	-


Environmental Data	
Vibration:	10 – 55 Hz, 0,5 mm
Shock:	30 g
Operation Temperature:	– 25 to +65 °C
Storage Temperature:	– 40 to +80 °C
Sealing Class:	IP 67
Light Immunity 20°:	> 80 000 lux

## Approvals




## Connections


## 4 pin, M12

Sensor Plug  
(Male)Cable Plug  
(Female)

## Wiring Diagram

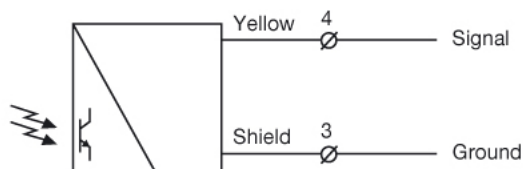


## Dimensions

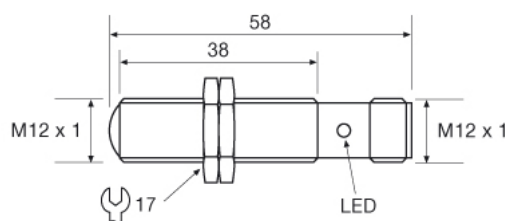

Sensing Characteristics

Parallel Displacement

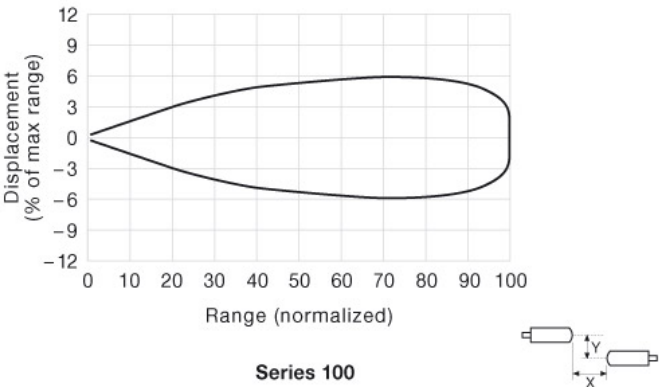

Angular Displacement

