

RSAN SERIES

SPECIFICATIONS




RSAN SERIES

SPECIFICATIONS

	Model Items		RSAN-2003	RSAN-2006	RSAN-2010	RSAN-2016	RSAN-2020	
1	Rated Voltage (AC, DC)		V	250				
2	Rated Current (AC, DC) *1		A	3	6	10	16	20
3	Test Voltage (terminals to base plate, 1min AC)		V	2500 at 20±15°C, 65± 20 %				
4	Isolation Resistance (terminals to base plate, 500V DC)		M Ω	100 min. at 20±15°C, 65± 20 %				
5	Leakage Current	250V, 60Hz	mA	1 max.				
6	DC Resistance (both lines)		m Ω	250	110	40	20	10
7	Temperature Rise		°C	30 max.				
8	Operating Temperature		°C	-25 ~ +85				
9	Operating Humidity		-	15 ~ 85 % RH				
10	Storage Temperature		°C	-25 ~ +85				
11	Storage Humidity		-	5 ~ 85 % RH				
12	Vibration		-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.				
13	Safety Standards		-	EN60939 (SEMKO), UL1283, CSA C22.2 No.8				
14	Weight		g	170	230	230	230	230

NOTE

- *1 Value for Ta less than 55 °C (include 55 °C)
For Ta more than 55 °C (not include 55 °C)
According to the derating curve shown on the right.

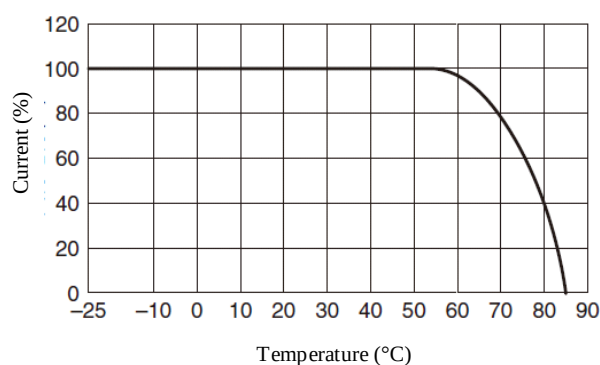

CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RSAN-001 200801


RSAN SERIES

SPECIFICATIONS

	Model Items		RSAN-2030	RSAN-2040	RSAN-2050	RSAN-2060		
1	Rated Voltage (AC, DC)		V	250				
2	Rated Current (AC, DC) *1		A	30	40	50	60	
3	Test Voltage (terminals to base plate, 1min AC)		V	2500 at 20±15°C, 65± 20 %				
4	Isolation Resistance (terminals to base plate, 500V DC)		M Ω	100 min. at 20±15°C, 65± 20 %				
5	Leakage Current	250V, 60Hz	mA	1 max.				
6	DC Resistance (both lines)		m Ω	6	6	4	3	
7	Temperature Rise		°C	30 max.				
8	Operating Temperature		°C	-25 ~ +85				
9	Operating Humidity		-	15 ~ 85 % RH				
10	Storage Temperature		°C	-25 ~ +85				
11	Storage Humidity		-	5 ~ 85 % RH				
12	Vibration		-	Frequency : 10~55Hz Amplitude : 1.5mm, Sweep for 1 min. Dimension and times : X, Y and Z directions for 2 hours each.				
13	Safety Standards		-	EN60939 (SEMKO), UL1283, CSA C22.2 No.8				
14	Weight		g	230	870	870	870	

NOTE

- *1 Value for Ta less than 55 °C (include 55 °C)
For Ta more than 55 °C (not include 55 °C)
According to the derating curve shown on the right.

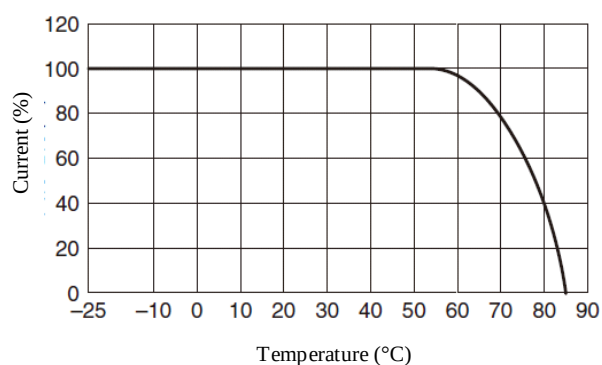

CAUTION

- Specifications which provide more details for the proper and safe use of the described product are available upon request.
- All specification are subject to change without notice.

A575NAA-RSAN-001 200801