


SUGATSUNE



SPRING LOADED LID STAY



S-AT01, S-AT02

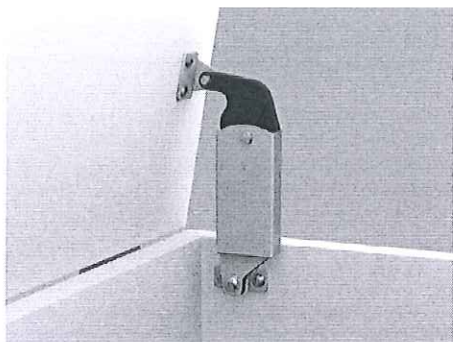

- Side mount type.
- Spring mechanism assists in lifting door and holds in open position (10°~80°).
- Can be installed individually or in pairs.
- Non-Handed: Can be installed on left or right side.
- *Does not work with concealed hinges.

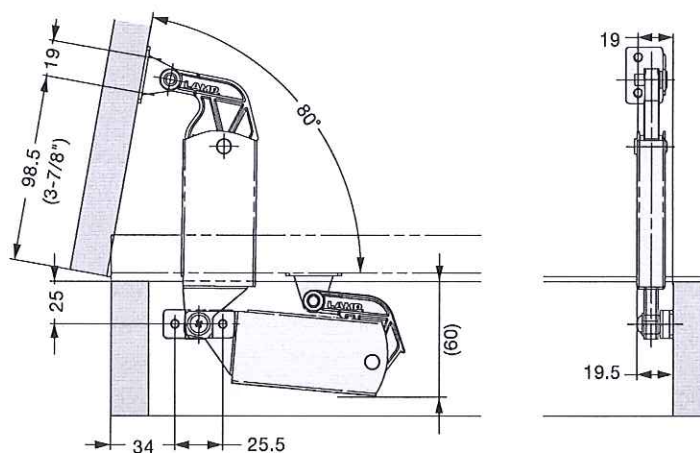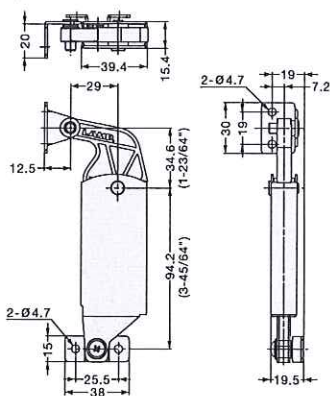


Item No.	Material	Finish	Max. Torque per piece (kgf·cm)	Box (pcs)	Carton (pcs)
S-AT01	430 Stainless Steel	Plain	90 (78 lbs-in)	10	50
S-AT02	Steel, Polyacetal		120 (104 lbs-in)		



SPRING LOADED LID STAY



S-AT01S, S-AT02S

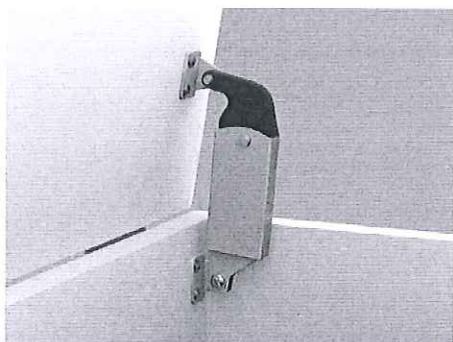

- Back panel mount type.
- Spring mechanism assists in lifting door and holds in open position (10°~80°).
- Can be used individually or in multiples.
- *Does not work with concealed hinges.

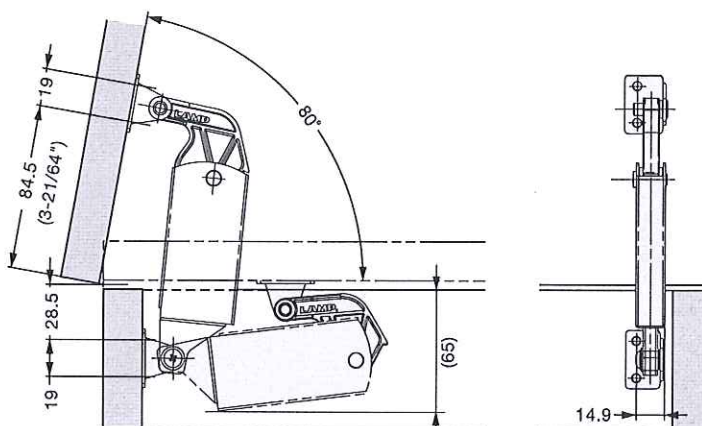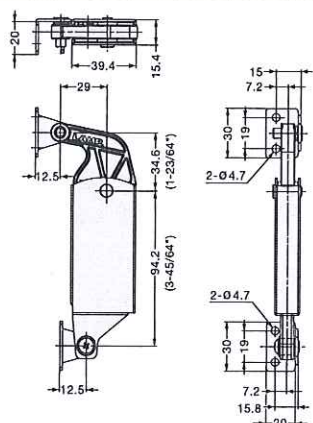

Item No.	Material	Finish	Max. Torque per piece (kgf·cm)	Box (pcs)	Carton (pcs)
S-AT01S	430 Stainless Steel	Plain	90 (78 lbs-in)	10	50
S-AT02S	Steel, Polyacetal		120 (104 lbs-in)		

www.sugatsune.com

LAMP
by SUGATSUNE1-800-562-5267
(U.S.A. Only)