


Vision is
our mission®

Multi Cable 1x coax + 2x power + 3x data


Article no. 1220100

2015 • DS1220100 EN R2-0

Product Data

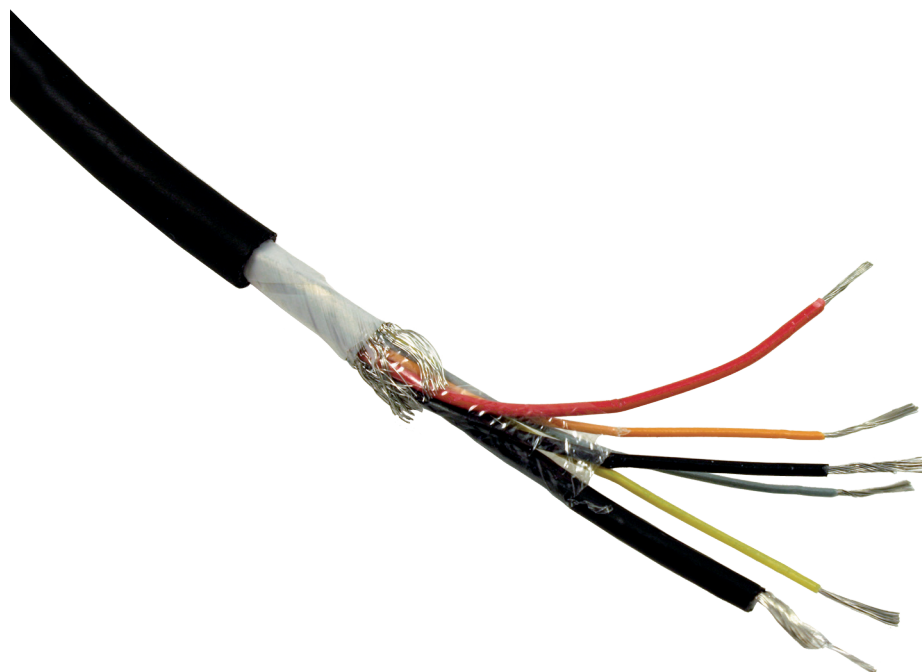

Cable section

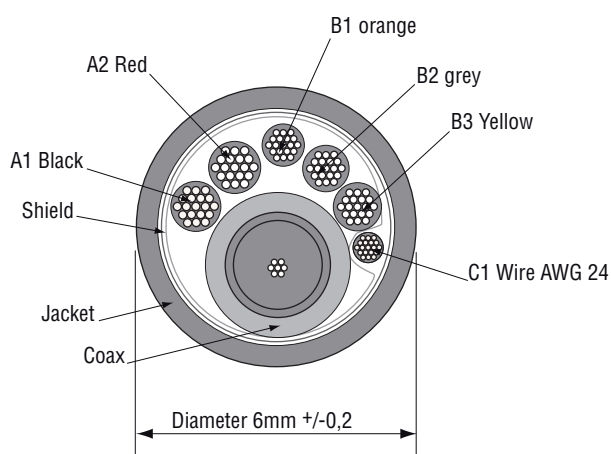

TECHNICAL DATA

Multi Cable 1x coax + 2x power + 3x data

	Description
Article number	1220100
Shield	Tinned copper, spiral, coverage approx 95%.
Coax	Coax Cable 26AWG 19 x 0,10 mm. Shield tinned copper spiral coverage approx 95%, Sheath PVC Black.
A1, A2 Conductor	2 x AWG22, 19 x 0,15mm, tinned copper. Color: Black, Red.
B1 to B3 Conductor	3 x AWG26, 19 x 0,10mm, tinned copper. Color: Yellow, Orange, Grey.
C1 Wire	Tinned copper 19 x 0,13mm 24AWG.
Jacket	PUR Santoprene D40, overall diameter 6mm +/-0,2mm, Color: Black.
Temperature range	-40°...+85°C.
Approval	UL.
Min. bending radius	Static: 59mm, not for dynamic applications.
Weight	0,07 kg/m

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

