




KIT
Available
See pg. 18

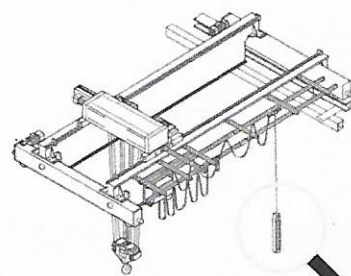


LIFTING EQUIPMENT

Characteristics:

- ☐ Bi-directional, mechanically interlocked
- ☐ IP 65 double insulation IEC/EN60529 ☐
- ☐ General and electrical data page 23
- ☐ Laser engraved symbols comply with EN60204-1, FEM 9.941
- ☐ Shock proof and heat resistant

CODE	PLB04/E	PLB04D2/E	PLB06/E	PLB06D2/E	PLB06D4/E	PLB08/E	PLB08D2/E	PLB08D4/E	PLB08D6/E	PLB10/E	PLB12/E	PLB14/E
weight [gr.]	530	555	700	730	755	860	895	920	945	1.080	1.245	1.445
N° push button	4	4	6	6	6	8	8	8	8	10	12	14
L length [mm]	345	345	399	399	399	453	453	453	453	547	604	655
LAYOUT												

DIMENSIONS

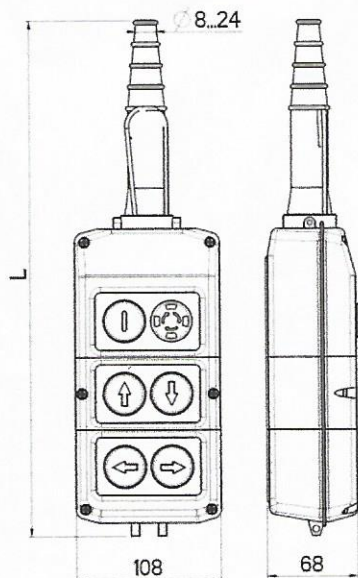

TIPO DI PULSANTE – TIPO DI CONTATTO ABBINATO								

(*) two speed contact block