




SMC™-3 and SMC Flex Smart Motor Controllers

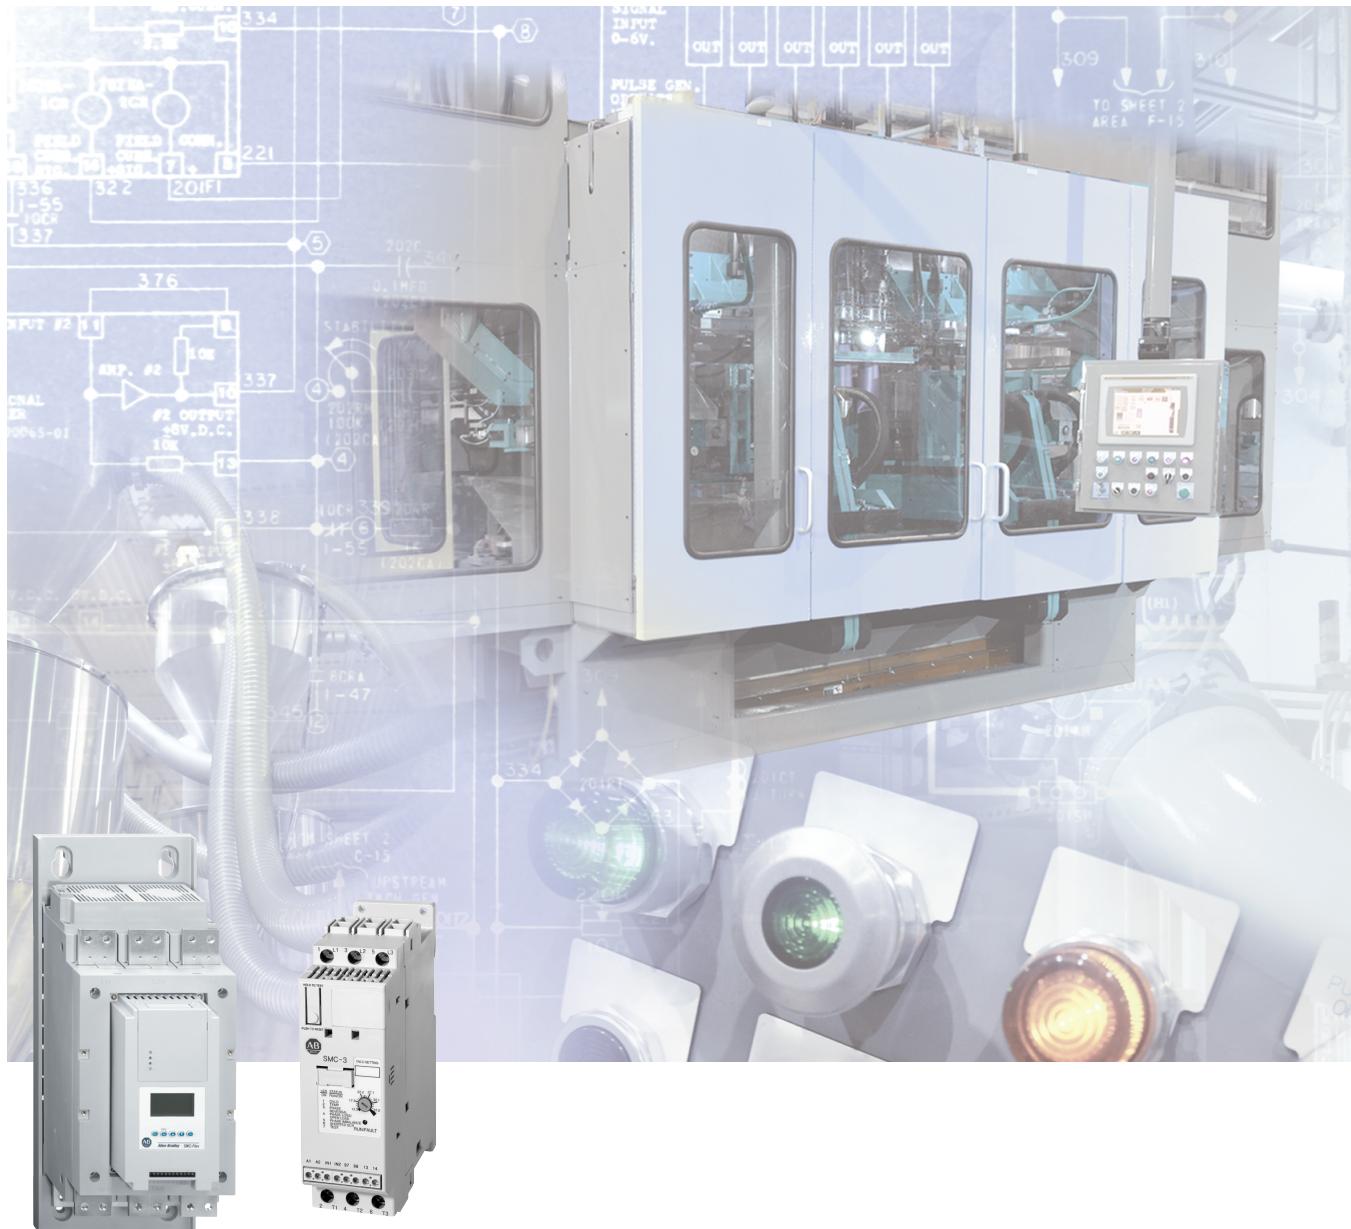

LISTEN.
THINK.
SOLVE.®

Allen-Bradley • Rockwell Software

**Rockwell
Automation**

Bulletin 150 — Solid-State Reduced Voltage Starters

The Allen-Bradley SMC™ Smart Motor Controller product line offers a broad range of products for starting and stopping standard 3-phase squirrel-cage induction motors and wye-delta motors.

		
Features	SMC™ Flex	SMC™-3
Soft Start	S	S
Kickstart	S	S
Current Limit	S	S
Dual Ramp Start	S	—
Full Voltage	S	—
Energy Saver	—	—
Soft Stop	S	S
Pump Control	O	—
Preset Slow Speed	S	—
Linear Acceleration/Deceleration	S	—
Torque Control	—	—
SMB™ Smart Motor Braking	O	—
Accu-Stop™	O	—
Slow Speed with Braking	O	—
Integrated Bypass Contactor	S	S
Integrated Motor Overload Protection	S	S
Single-phase Operation	—	—
DPI Communication	S	—
Metering	S	—
Real Time Clock	—	—
Motor Winding Heater Function	‡	—
Diagnostic Faults and Alarms	S	—
Motor and Starter	—	—
Individual Bit Enable of Faults and Alarms	—	—
Automatic Tuning of Motor Parameters	—	—
Parameter Configuration/Programming	S	—
Human Interface Module (HIM)	O	—
Parameter Configuration Module	—	—
Configuration Software: Drives Explorer and Drives Executive	O	—
Digital I/O Expansion Module§	—	—
Ground Fault/CT/PTC Module§	—	—
Network Communications	O	—
Inside Delta Connection	S	S
Standards Compliance: CE Marked per Low Voltage Directive 73/23/EEC, 93/68/EEC CSA Certified (File No. LR 1234) UL Listed (File No. E96956)	S	S
Product Selection	Page 6	Page 30

S = Standard Feature

O = Optional Feature

★ Starter does not include a configuration device as standard.

‡ Option using a Bulletin 1410 motor winding heater.

§ With removable terminal block.

▲ Starter ships with 2 DC inputs and 2 relay outputs as standard.

▲ The starter is fully solid-state (no integral bypass). An external bypass contactor can be added as an option.

& Note: Information for this product line is available on the Industrial Controls catalog web site: www.ab.com/catalogs.

△ Note: Information for this product line is available in publication 150-SG010* or on the Industrial Controls catalog web site: www.ab.com/catalogs.



Allen-Bradley

www.ab.com/catalogs

Publication 150-SG009F-EN-P

Reduced Voltage Starters


Modes of Operation

Modes of Operation

The SMC controllers provide the following modes of operation:


Soft Start

This method covers the most general applications. The motor is given an initial torque setting, which is user adjustable. From the initial torque level, the output voltage to the motor is steplessly increased during the acceleration ramp time, which is user adjustable.

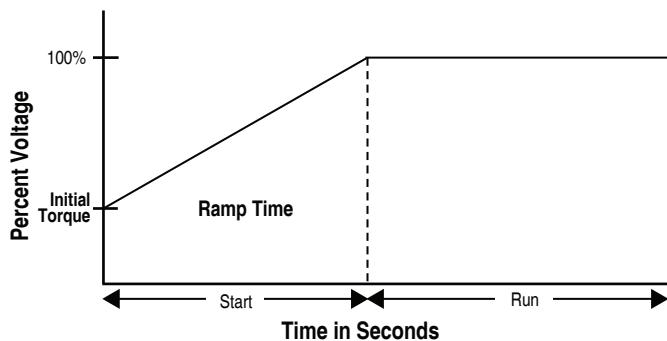


Selectable Kickstart

The kickstart feature provides a boost at startup to break away loads that may require a pulse of high torque to get started. It is intended to provide a current pulse, for a selected period of time.

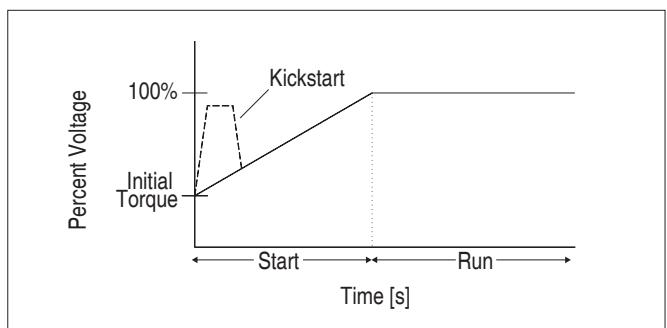


Current Limit Start

This method provides current limit start and is used when it is necessary to limit the maximum starting current. The starting current is user adjustable. The current limit starting time is user adjustable.

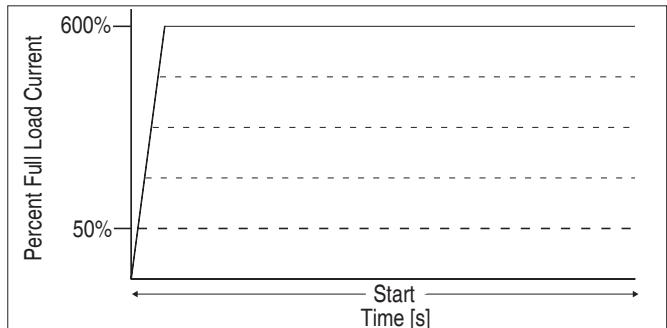


Dual Ramp Start

This starting method is useful on applications with varying loads, starting torque, and start time requirements. Dual Ramp Start offers the user the ability to select between two separate start profiles with separately adjustable ramp times and initial torque settings.

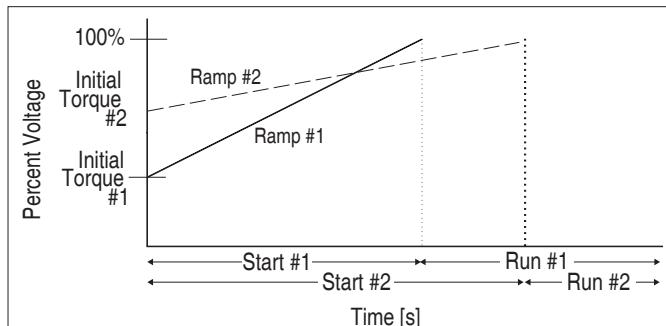


Full Voltage Start

This method is used in applications requiring across-the-line starting. The SMC controller performs like a solid-state contactor. Full inrush current and locked-rotor torque are realized. The SMC may be programmed to provide full voltage start in which the output voltage to the motor reaches full voltage.

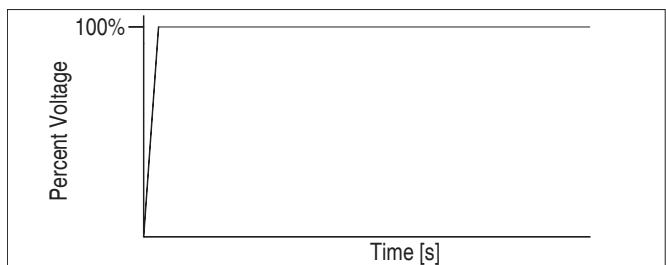


Linear Speed Acceleration

With this type of acceleration mode, a closed-loop feedback system maintains the motor acceleration at a constant rate. The required feedback signal is provided by a DC tachometer coupled to the motor (tachometer supplied by user 0...5V DC, 4.5V DC = 100% speed). Kickstart is available with this mode.

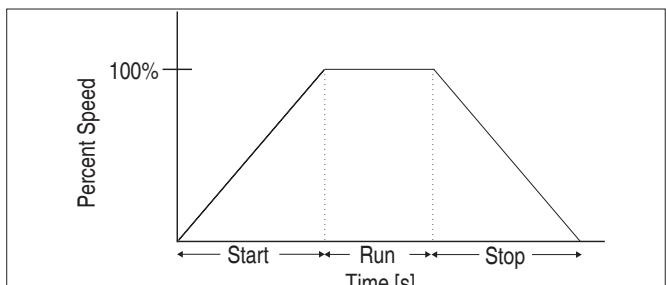


Preset Slow Speed

This method can be used on applications that require a slow speed for positioning material. The Preset Slow Speed can be set for either Low, 7% of base speed, or High, 15% of base speed. Reversing is also possible through programming. Speeds provided during reverse operation are (low) 10% of base speed, or (high) 20% of base speed.

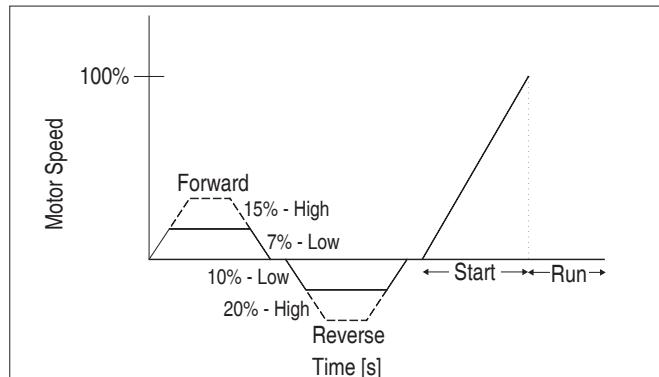

Soft Stop[‡]


The Soft Stop option can be used in applications requiring an extended coast-to-rest. The voltage ramp down time is user adjustable. The load will stop when the voltage drops to a point where the load torque is greater than the motor torque.

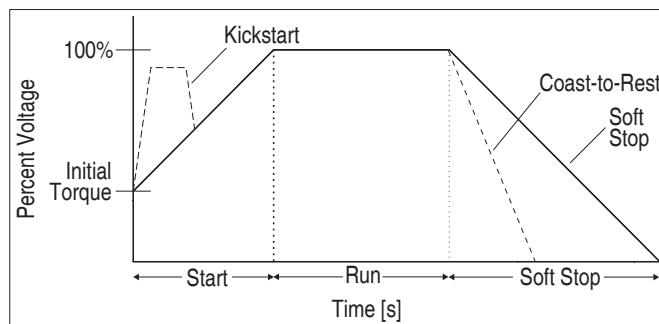

Pump Control


Start and Stop[‡]

This option is used to reduce surges during the starting and stopping of a centrifugal pump by smoothly accelerating and decelerating the motor. The microprocessor analyzes the motor variables and generates commands which control motor torque and reduce the possibility of surges occurring in the system.

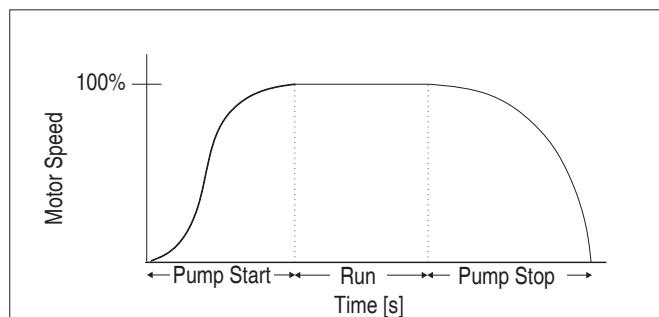


SMB Smart Motor Braking[‡]

This option provides motor braking for applications that require the motor to stop faster than a coast to rest. Braking control, with automatic zero speed shut off, is fully integrated into the compact design of the SMC controller. This design facilitates a clean, straightforward forward installation and eliminates the requirement for additional hardware such as braking contactors, resistors, timers, and speed sensors. The microprocessor based braking system applies braking current to a standard squirrel-cage induction motor. The strength of the braking current is user programmable.

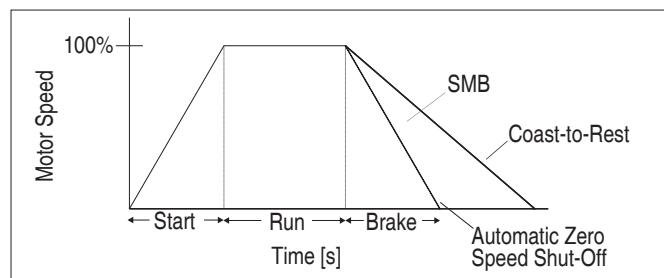


Accu-Stop[‡]

This option is used in applications requiring controlled position stopping. During stopping, braking torque is applied to the motor until it reaches preset slow speed (7% or 15% of rated speed) and holds the motor at this speed until a stop command is given. Braking torque is then applied until the motor reaches zero speed. Braking current and slow speed current are user programmable. Slow speed can be programmed for either 7% (low) or 15% (high).

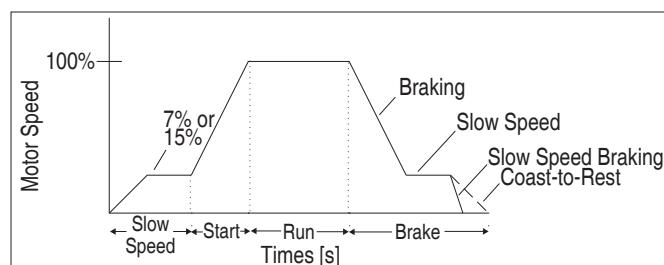

Slow Speed with Braking[‡]

Slow Speed with Braking is used on applications that require slow speed (in the forward direction) for positioning or alignment and also require braking control to stop. Slow speed adjustments are 7% (low) or 15% (high) of rated speed. Slow speed acceleration current, slow speed running current, and braking current are all adjustable.

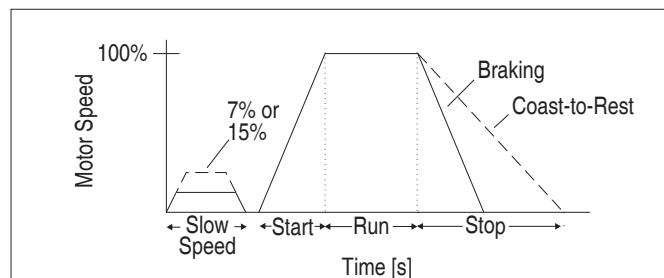

[‡] Not intended to be used as an emergency stop. Refer to the applicable standards for emergency stop requirements.



SMC™ Flex Smart Motor Controllers

Overview

**Bulletin 150 — SMC™ Flex Smart Motor Controller**

The SMC Flex controller provides microprocessor controlled starting for standard 3-phase squirrel-cage induction or Wye-Delta (6-lead) motors. Seven standard modes of operation are available within a single controller.

- 1...1250 A Range
- Seven Standard Start Modes
- Options Include Pump Control and Braking Control

Features

- | | |
|--|--|
| <ul style="list-style-type: none"> • Built in SCR Bypass/Run Contactor • Built in Electronic Motor Overload Protection • CT on each Phase • Metering | <ul style="list-style-type: none"> • DPI Communication • LCD Display • Keypad Programming • Four Programmable Auxiliary Contacts |
|--|--|

The SMC Flex controller is available for motors rated 1...1250 A; 200...480V AC, 200...600V AC, or 230...690V AC, 50/60 Hz. In addition to motors, the SMC Flex controller can be used to control resistive loads.

Table of Contents

Features.....	this page
Cat. No. Explanation	8
Product Selection.....	9
Options	19
Accessories.....	20
Specifications.....	22
Approx. Dims.	27

This catalog is based on the **minimum** information needed to select an SMC soft starter for applications with low starting torque requirements. For product selection involving loads with high starting torque requirements (large fan, rock crusher, chipper, etc.), use of the free tools available from the Rockwell Automation Website is recommended:

http://www.ab.com/industrialcontrols/products/solid-state_motor_control/software/

Standards Compliance

UL 508
CSA C22.2 No.14
EN/IEC 60947-1
EN/IEC 60947-4-2

Modes of Operation

The SMC Flex controller provides the following modes of operation as standard:

- | | |
|--|---|
| <ul style="list-style-type: none"> • Soft Start • Selectable Kickstart • Current Limit Start • Dual Ramp Start | <ul style="list-style-type: none"> • Full Voltage Start • Linear Speed Acceleration • Preset Slow Speed • Soft Stop |
|--|---|

Note: For detailed information about the different modes of operation, see page 4.

Description of Features**Electronic Motor Overload Protection**

The SMC Flex controller incorporates, as standard, electronic motor overload protection. This overload protection is accomplished electronically with an I^2t algorithm.

When coordinated with the proper short-circuit protection, overload protection is intended to protect the motor, motor controller, and power wiring against overheating caused by excessive overcurrent. The SMC Flex controller meets applicable requirements as a motor overload protective device.

The controller's overload protection is programmable, providing the user with flexibility. The overload trip class consists of either OFF, 10, 15, 20, or 30 protection. The trip current is programmed by entering the motor full-load current rating, service factor, and selecting the trip class.

Certifications

cULus Listed (Open Type) (File No. E96956, Guides NMFT, NMFT7)
CSA Certified (File No. LR 1234)
CE Marked
CCC Certified

Optional Modes of Operation**Pump Control**

- Start and Stop

Braking Control

- | | |
|--|---|
| <ul style="list-style-type: none"> • SMB — Smart Motor Braking • Slow Speed with Braking | <ul style="list-style-type: none"> • Accu-Stop |
|--|---|

Undervoltage Protection

The SMC Flex controller's undervoltage protection will halt motor operation if a drop in the incoming line voltage is detected.

The undervoltage trip level is adjustable as a percentage of the programmed line voltage, from 0...99%. To eliminate nuisance trips, a programmable undervoltage trip delay time of 0...99 seconds can also be programmed. The line voltage must remain below the undervoltage trip level during the programmed delay time.

Oversupply Protection

If a rise in the incoming line voltage is detected, the SMC Flex controller's oversupply protection will halt motor operation.

The oversupply trip level is adjustable as a percentage of the programmed line voltage, from 0...199%. To eliminate nuisance trips, a programmable oversupply trip delay time of 0...99 seconds can also be programmed. The line voltage must remain above the oversupply trip level during the programmed delay time.

Stall Protection and Jam Detection

Motors can experience locked-rotor currents and develop high torque levels in the event of a stall or a jam. These conditions can result in winding insulation breakdown or mechanical damage to the connected load. The SMC Flex controller provides both stall protection and jam detection for enhanced motor and system protection. Stall protection allows the user to program a maximum stall protection delay time from 0...10 seconds. The stall protection delay time is in addition to the programmed start time and begins only after the start time has timed out. If the controller senses that the motor is stalled, it will shut down after the delay period has expired. Jam detection allows the user to determine the motor jam detection level as a percentage of the motor's full-load current rating. To prevent nuisance tripping, a jam detection delay time, from 0.0...99.0 seconds, can be programmed. This allows the user to select the time delay required before the SMC Flex controller will trip on a motor jam condition. The motor current must remain above the jam detection level during the delay time. Jam detection is active only after the motor has reached full speed.

Underload Protection

Utilizing the underload protection of the SMC Flex controller, motor operation can be halted if a drop in current is sensed. The SMC Flex controller provides an adjustable underload trip setting from 0...99% of the programmed motor full-load current rating with an adjustable trip delay time of 0...99 seconds.

Voltage Unbalance Protection

Voltage unbalance is detected by monitoring the 3-phase supply voltage magnitudes in conjunction with the rotational relationship of the three phases. The controller will halt motor operation when the calculated voltage unbalance reaches the user-programmed trip level.

The voltage unbalance trip level is programmable from 0...25% unbalance.

Excessive Starts Per Hour

The SMC Flex controller allows the user to program the allowed number of starts per hour (up to 99). This helps eliminate motor stress caused by repeated starting during a short time period.

Metering

Power monitoring parameters include:

- 3-phase current
- Power Factor
- 3-phase voltage
- Motor thermal capacity usage
- Power in kW or MW
- Elapsed time
- Power usage in kWh or MWh

Note: The motor thermal capacity usage allows the user to monitor the amount of overload thermal capacity usage before the SMC Flex controller's built-in electronic overload trips.

Built-in DPI Communication Capabilities

A serial interface port is provided as standard, which allows connection to a Bulletin 20 Human Interface Module and a variety of Bulletin 20-COMM Communication Modules. This includes Allen-Bradley Remote I/O, DeviceNet, ControlNet, Ethernet, Profibus, Interbus, and RS485-DF1.

LCD Display

The SMC Flex controller's three-line 16-character backlit LCD display provides parameter identification using clear, informative text. Controller set up can be performed quickly and easily without the use of a reference manual. Parameters are arranged in an organized four-level menu structure for ease of programming and fast access to parameters.

Keypad Programming

Programming of parameters is accomplished through a five-button keypad on the front of the SMC Flex controller. The five buttons include up and down arrows, an Enter button, a Select button, and an Escape button. The user needs only to enter the correct sequence of keystrokes for programming the SMC Flex controller.

Auxiliary Contacts

Four fully programmable hard contacts are furnished as standard with the SMC Flex controller:

Aux #1, Aux #2, Aux #3, Aux #4

- N.O./N.C.

- Normal/Up-to-Speed/External Bypass/Fault/Alarm/Network

Network I/O

The SMC Flex can have up to two inputs and four outputs controlled via a communication network. The output contacts use the auxiliary contacts.

Ground Fault Input

The SMC Flex can monitor for ground fault conditions. An external core balance current transformer is required for this function. See SMC Flex User Manual for additional information.

Tach Input

A motor tachometer is required for the Linear Speed Start mode. Please see the Specifications section on page 22 for tachometer characteristics.

PTC Input

A motor PTC input can be monitored by the SMC Flex. In the event of a fault, the SMC Flex will shut down and indicate a motor PTC fault.



SMC™ Flex Smart Motor Controllers

Catalog Number Explanation

Open and Non-Combination

150 - F135 F B D B - 8L

a b c d e f g

Bulletin Number	
Code	Description
150	Solid-State Controller
150B	Enclosed Solid-State Controller with Isolation Contactor

Enclosure Type	
Code	Description
F	NEMA Type 4/12 (IP65) (Non-Combination Only)
J	NEMA Type 12 (IP54)
N	Open

Control Voltage	
Code	Description
D	100...240V AC (5...480 A units)
R	24V AC/DC (5...480 A units) (Open Only)
E	110/120V AC (625...1250 A units)
A	230/240V AC (625...1250 A units)

Controller Ratings	
Code	Description
F5	5 A, 3 Hp @ 460V AC
F25	25 A, 15 Hp @ 460V AC
F43	43 A, 30 Hp @ 460V AC
F60	60 A, 40 Hp @ 460V AC
F85	85 A, 60 Hp @ 460V AC
F108	108 A, 75 Hp @ 460V AC
F135	135 A, 100 Hp @ 460V AC
F201	201 A, 150 Hp @ 460V AC
F251	251 A, 200 Hp @ 460V AC
F317	317 A, 250 Hp @ 460V AC
F361	361 A, 300 Hp @ 460V AC
F480	480 A, 400 Hp @ 460V AC
F625	625 A, 500 Hp @ 460V AC
F780	780 A, 600 Hp @ 460V AC
F970	970 A, 800 Hp @ 460V AC
F1250	1250 A, 1000 Hp @ 460V AC

Input Line Voltage	
Code	Description
B	200...460V AC, 3-phase, 50 and 60 Hz
C	200...575V AC, 3-phase, 50 and 60 Hz
Z	230...690V AC, 3-phase, 50 and 60 Hz (Open Only, 108 A and above)
Non-Combination Enclosed Only	
H	200...208V AC, 3-phase, 50 and 60 Hz
A	230V AC, 3-phase, 50 and 60 Hz
B	400...460V AC, 3-phase, 50 and 60 Hz
C	500...575V AC, 3-phase, 50 and 60 Hz

Options (Select Only One)	
Code	Description
Blank	Standard
B	Pump Control
D	Braking Control

Options (Non-Combination only) (see page 19 for a full listing)	
Code	Description
8L	Line-Mounted Protective Module (enclosed only)
8M	Load-Mounted Protective Module (enclosed only)
8B	Line- and Load-Mounted Protective Modules (enclosed only)
Load-side MOVs are not available with Pump and Braking options, or on delta-connected motors. MOVs can be field installed for open type units.	

Combination

152H - F480 F BD B - 59 - 8B

a b c d e f g e

Bulletin Number	
Code	Description
152H	Solid-State Controller with Fusible Disconnect
152B	Solid-State Controller with Fusible Disconnect and Isolation Contactor
153H	Solid-State Controller with Circuit Breaker
153B	Solid-State Controller with Circuit Breaker and Isolation Contactor

Enclosure Type	
Code	Description
F	NEMA Type 4/12 (IP65)
J	NEMA Type 12 (IP54)

Control Options	
Code	Description
Blank	Standard
B	Pump Control
D	Braking Control

Line Voltage, 120V AC Control Voltage	
Code	Description
HD	200...208V AC, 3-phase, 50 and 60 Hz
AD	230V AC, 3-phase, 50 and 60 Hz
BD	400...460V AC, 3-phase, 50 and 60 Hz
CD	500...575V AC, 3-phase, 50 and 60 Hz

Options (see page 19 for a full listing)	
Code	Description
8L	Line-Mounted Protective Module
8M	Load-Mounted Protective Module
8B	Line- and Load-Mounted Protective Modules
Load-side MOVs are not available with Pump and Braking options, or when used with inside-the-delta connections.	

Controller Ratings	
Code	Description
F5	5 A, 3 Hp @ 460V AC
F25	25 A, 15 Hp @ 460V AC
F43	43 A, 30 Hp @ 460V AC
F60	60 A, 40 Hp @ 460V AC
F85	85 A, 60 Hp @ 460V AC
F108	108 A, 75 Hp @ 460V AC
F135	135 A, 100 Hp @ 460V AC
F201	201 A, 150 Hp @ 460V AC
F251	251 A, 200 Hp @ 460V AC
F317	317 A, 250 Hp @ 460V AC
F361	361 A, 300 Hp @ 460V AC
F480	480 A, 400 Hp @ 460V AC
F625	625 A, 500 Hp @ 460V AC
F780	780 A, 600 Hp @ 460V AC

Horsepower									
Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating
33	0.5	39	5	46	40	52	150	60	450
34	0.75	40	7.5	47	50	54	200	61	500
35	1	41	10	48	60	56	250	62	600
36	1.5	42	15	49	75	57	300	63	700
37	2	43	20	50	100	58	350	65	800
38	3	44	25	51	125	59	400	67	1000
—	—	45	30	—	—	—	—	—	—



Open Type and Non-Combination Enclosed (IP65, Type 4/12) Controllers — For use with Line-Connected Motors

Enclosures other than those listed are available; consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors ★	IP65 (Type 4/12) Enclosed Non-Combination Controllers◆◆
					Cat. No.	Cat. No.
200/208	1...5	—	1	100...240V AC, 50/60 Hz	150-F5NBD	150-F5FHD
				24V AC/DC△	150-F5NBR	—
	5...25	—	5	100...240V AC, 50/60 Hz	150-F25NBD	150-F25FHD
				24V AC/DC△	150-F25NBR	—
	8.6...43	—	10	100...240V AC, 50/60 Hz	150-F43NBD	150-F43FHD
				24V AC/DC△	150-F43NBR	—
	12...60	—	15	100...240V AC, 50/60 Hz	150-F60NBD	150-F60FHD
				24V AC/DC△	150-F60NBR	—
	17...85	—	25	100...240V AC, 50/60 Hz	150-F85NBD	150-F85FHD
				24V AC/DC△	150-F85NBR	—
	27...108	—	30	100...240V AC, 50/60 Hz	150-F108NBD	150-F108FHD
				24V AC/DC△	150-F108NBR	—
	34...135	—	40	100...240V AC, 50/60 Hz	150-F135NBD	150-F135FHD
				24V AC/DC△	150-F135NBR	—
	67...201	—	60	100...240V AC, 50/60 Hz	150-F201NBD	150-F201FHD
				24V AC/DC△	150-F201NBR	—
	84...251	—	75	100...240V AC, 50/60 Hz	150-F251NBD	150-F251FHD
				24V AC/DC△	150-F251NBR	—
	106...317	—	100	100...240V AC, 50/60 Hz	150-F317NBD	150-F317FHD
				24V AC/DC△	150-F317NBR	—
	120...361	—	125	100...240V AC, 50/60 Hz	150-F361NBD	150-F361FHD
				24V AC/DC△	150-F361NBR	—
	160...480	—	150	100...240V AC, 50/60 Hz	150-F480NBD	150-F480FHD
				24V AC/DC△	150-F480NBR	—
	208...625	—	200	110/120V AC, 50/60 Hz	150-F625NBE	▲ 150-F625JHE
				230/240V AC, 50/60 Hz	150-F625NBA	▲ 150-F625JHA
	260...780	—	250	110/120V AC, 50/60 Hz	150-F780NBE	▲ 150-F780JHE
				230/240V AC, 50/60 Hz	150-F780NBA	▲ 150-F780JHA
	323...970	—	350	110/120V AC, 50/60 Hz	150-F970NBE	—
				230/240V AC, 50/60 Hz	150-F970NBA	—
	416...1250	—	400	110/120V AC, 50/60 Hz	150-F1250NBE	—
				230/240V AC, 50/60 Hz	150-F1250NBA	—

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

◆ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single-phase power supply is required for fan operation.

◆ Line and load termination are provided as standard.

▲ Available in IP54 (Type 12) enclosure only.



SMC™ Flex Smart Motor Controllers

Product Selection

Open Type and Non-Combination Enclosed (IP65, Type 4/12) Controllers — For use with Line-Connected Motors, Continued

Enclosures other than those listed are available; consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors★	IP65 (Type 4/12) Enclosed Non-Combination Controllers◆♦
					Cat. No.	Cat. No.
230	1...5	1.1	1	100...240V AC, 50/60 Hz	150-F5NBD	150-F5FAD
				24V AC/DC△	150-F5NBR	—
	5...25	5.5	7.5	100...240V AC, 50/60 Hz	150-F25NBD	150-F25FAD
				24V AC/DC△	150-F25NBR	—
	8.6...43	11	15	100...240V AC, 50/60 Hz	150-F43NBD	150-F43FAD
				24V AC/DC△	150-F43NBR	—
	12...60	15	20	100...240V AC, 50/60 Hz	150-F60NBD	150-F60FAD
				24V AC/DC△	150-F60NBR	—
	17...85	22	30	100...240V AC, 50/60 Hz	150-F85NBD	150-F85FAD
				24V AC/DC△	150-F85NBR	—
	27...108	30	40	100...240V AC, 50/60 Hz	150-F108NBD	150-F108FAD
				24V AC/DC△	150-F108NBR	—
	34...135	37	50	100...240V AC, 50/60 Hz	150-F135NBD	150-F135FAD
				24V AC/DC△	150-F135NBR	—
	67...201	55	75	100...240V AC, 50/60 Hz	150-F201NBD	150-F201FAD
				24V AC/DC△	150-F201NBR	—
	84...251	75	100	100...240V AC, 50/60 Hz	150-F251NBD	150-F251FAD
				24V AC/DC△	150-F251NBR	—
	106...317	90	125	100...240V AC, 50/60 Hz	150-F317NBD	150-F317FAD
				24V AC/DC△	150-F317NBR	—
	120...361	110	150	100...240V AC, 50/60 Hz	150-F361NBD	150-F361FAD
				24V AC/DC△	150-F361NBR	—
	160...480	132	200	100...240V AC, 50/60 Hz	150-F480NBD	150-F480FAD
				24V AC/DC△	150-F480NBR	—
	208...625	200	250	110/120V AC, 50/60 Hz	150-F625NBE	▲ 150-F625JAE
				230/240V AC, 50/60 Hz	150-F625NBA	▲ 150-F625JAA
	260...780	250	300	110/120V AC, 50/60 Hz	150-F780NBE	▲ 150-F780JAE
				230/240V AC, 50/60 Hz	150-F780NBA	▲ 150-F780JAA
	323...970	315	400	110/120V AC, 50/60 Hz	150-F970NBE	—
				230/240V AC, 50/60 Hz	150-F970NBA	—
	416...1250	400	500	110/120V AC, 50/60 Hz	150-F1250NBE	—
				230/240V AC, 50/60 Hz	150-F1250NBA	—

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

◆ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single-phase power supply is required for fan operation.

♦ Line and load termination are provided as standard.

▲ Available in IP54 (Type 12) enclosure only.



Open Type and Non-Combination Enclosed (IP65, Type 4/12) Controllers — For use with Line-Connected Motors, Continued

Enclosures other than those listed are available; consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors★	IP65 (Type 4/12) Enclosed Non-Combination Controllers▲◆
					Cat. No.	Cat. No.
400/415/460	1...5	2.2	3	100...240V AC, 50/60 Hz	150-F5NBD	150-F5FBD
				24V AC/DC△	150-F5NBR	—
	5...25	11	15	100...240V AC, 50/60 Hz	150-F25NBD	150-F25FBD
				24V AC/DC△	150-F25NBR	—
	8.6...43	22	30	100...240V AC, 50/60 Hz	150-F43NBD	150-F43FBD
				24V AC/DC△	150-F43NBR	—
	12...60	30	40	100...240V AC, 50/60 Hz	150-F60NBD	150-F60FBD
				24V AC/DC△	150-F60NBR	—
	17...85	45	60	100...240V AC, 50/60 Hz	150-F85NBD	150-F85FBD
				24V AC/DC△	150-F85NBR	—
	27...108	55	75	100...240V AC, 50/60 Hz	150-F108NBD	150-F108FBD
				24V AC/DC△	150-F108NBR	—
	34...135	75	100	100...240V AC, 50/60 Hz	150-F135NBD	150-F135FBD
				24V AC/DC△	150-F135NBR	—
	67...201	110	150	100...240V AC, 50/60 Hz	150-F201NBD	150-F201FBD
				24V AC/DC△	150-F201NBR	—
	84...251	132	200	100...240V AC, 50/60 Hz	150-F251NBD	150-F251FBD
				24V AC/DC△	150-F251NBR	—
	106...317	160	250	100...240V AC, 50/60 Hz	150-F317NBD	150-F317FBD
				24V AC/DC△	150-F317NBR	—
	120...361	200	300	100...240V AC, 50/60 Hz	150-F361NBD	150-F361FBD
				24V AC/DC△	150-F361NBR	—
	160...480	250	400	100...240V AC, 50/60 Hz	150-F480NBD	150-F480FBD
				24V AC/DC△	150-F480NBR	—
	208...625	355	500	110/120V AC, 50/60 Hz	150-F625NBE	▲ 150-F625JBE
				230/240V AC, 50/60 Hz	150-F625NBA	▲ 150-F625JBA
	260...780	450	600	110/120V AC, 50/60 Hz	150-F780NBE	▲ 150-F780JBE
				230/240V AC, 50/60 Hz	150-F780NBA	▲ 150-F780JBA
	323...970	560	800	110/120V AC, 50/60 Hz	150-F970NBE	—
				230/240V AC, 50/60 Hz	150-F970NBA	—
	416...1250	710	1000	110/120V AC, 50/60 Hz	150-F1250NBE	—
				230/240V AC, 50/60 Hz	150-F1250NBA	—

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

▲ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single-phase power supply is required for fan operation.

◆ Line and load termination are provided as standard.

▲ Available in IP54 (Type 12) enclosure only.



SMC™ Flex Smart Motor Controllers

Product Selection

Open Type and Non-Combination Enclosed (IP65, Type 4/12) Controllers — For use with Line-Connected Motors, Continued

Enclosures other than those listed are available; consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors★		IP65 (Type 4/12) Enclosed Non-Combination Controllers▲◆
					Cat. No.	Cat. No.	
500/575	1...5	2.2	3	100...240V AC, 50/60 Hz 24V AC/DC△	150-F5NCD 150-F5NCR	—	150-F5FCD
	5...25	15	20	100...240V AC, 50/60 Hz 24V AC/DC△	150-F25NCD 150-F25NCR	—	150-F25FCD
	8.6...43	22	40	100...240V AC, 50/60 Hz 24V AC/DC△	150-F43NCD 150-F43NCR	—	150-F43FCD
	12...60	37	50	100...240V AC, 50/60 Hz 24V AC/DC△	150-F60NCD 150-F60NCR	—	150-F60FCD
	17...85	55	75	100...240V AC, 50/60 Hz 24V AC/DC△	150-F85NCD 150-F85NCR	—	150-F85FCD
	27...108	75	100	100...240V AC, 50/60 Hz 24V AC/DC△	150-F108NCD 150-F108NCR	—	150-F108FCD
	34...135	90	125	100...240V AC, 50/60 Hz 24V AC/DC△	150-F135NCD 150-F135NCR	—	150-F135FCD
	67...201	132	200	100...240V AC, 50/60 Hz 24V AC/DC△	150-F201NCD 150-F201NCR	—	150-F201FCD
	84...251	160	250	100...240V AC, 50/60 Hz 24V AC/DC△	150-F251NCD 150-F251NCR	—	150-F251FCD
	106...317	200	300	100...240V AC, 50/60 Hz 24V AC/DC△	150-F317NCD 150-F317NCR	—	150-F317FCD
	120...361	250	350	100...240V AC, 50/60 Hz 24V AC/DC△	150-F361NCD 150-F361NCR	—	150-F361FCD
	160...480	315	500	100...240V AC, 50/60 Hz 24V AC/DC△	150-F480NCD 150-F480NCR	—	150-F480FCD
	208...625	450	600	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F625NCE 150-F625NCA	▲	150-F625JCE 150-F625JCA
	260...780	560	800	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F780NCE 150-F780NCA	▲	150-F780JCE 150-F780JCA
	323...970	710	1000	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F970NCE 150-F970NCA	—	—
	416...1250	900	1300	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F1250NCE 150-F1250NCA	—	—

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors★	
					Cat. No.	
690/Y\$	27...108	90	100	100...240V AC, 50/60 Hz	150-F108NZD	
	34...135	132	175	100...240V AC, 50/60 Hz	150-F135NZD	
	67...201	160	200	100...240V AC, 50/60 Hz	150-F201NZD	
	84...251	200	250	100...240V AC, 50/60 Hz	150-F251NZD	
	106...317	315	400	100...240V AC, 50/60 Hz	150-F317NZD	
	120...361	355	450	100...240V AC, 50/60 Hz	150-F361NZD	
	160...480	450	600	100...240V AC, 50/60 Hz	150-F480NZD	
	208...625	630	800	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F625NZE 150-F625NZA	
	260...780	800	1000	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F780NZE 150-F780NZA	
	323...970	1000	1300	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F970NZE 150-F970NZA	
	416...1250	1200	1600	110/120V AC, 50/60 Hz 230/240V AC, 50/60 Hz	150-F1250NZE 150-F1250NZA	

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

▲ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single-phase power supply is required for fan operation.

◆ Line and load termination are provided as standard.

§ To be used only in a Y-type system.

▲ Available in IP54 (Type 12) enclosure only.



Open Type Controllers — For use with Delta-Connected Motors

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type★	
					Cat. No.	
200/208	1.7...8.7	—	2	100...240V AC, 50/60 Hz	150-F5NBD	
				24V AC/DC△	150-F5NBR	
	8.7...43	—	10	100...240V AC, 50/60 Hz	150-F25NBD	
				24V AC/DC△	150-F25NBR	
	14.9...74	—	20	100...240V AC, 50/60 Hz	150-F43NBD	
				24V AC/DC△	150-F43NBR	
	20.8...104	—	30	100...240V AC, 50/60 Hz	150-F60NBD	
				24V AC/DC△	150-F60NBR	
	29.4...147	—	40	100...240V AC, 50/60 Hz	150-F85NBD	
				24V AC/DC△	150-F85NBR	
	47...187	—	60	100...240V AC, 50/60 Hz	150-F108NBD	
				24V AC/DC△	150-F108NBR	
	59...234	—	75	100...240V AC, 50/60 Hz	150-F135NBD	
				24V AC/DC△	150-F135NBR	
	116...348	—	100	100...240V AC, 50/60 Hz	150-F201NBD	
				24V AC/DC△	150-F201NBR	
	145...435	—	150	100...240V AC, 50/60 Hz	150-F251NBD	
				24V AC/DC△	150-F251NBR	
	183...549	—	200	100...240V AC, 50/60 Hz	150-F317NBD	
				24V AC/DC△	150-F317NBR	
	208...625	—	200	100...240V AC, 50/60 Hz	150-F361NBD	
				24V AC/DC△	150-F361NBR	
	277...831	—	300	100...240V AC, 50/60 Hz	150-F480NBD	
				24V AC/DC△	150-F480NBR	
	283...850	—	300	110/120V AC, 50/60 Hz	150-F625NBE	
				230/240V AC, 50/60 Hz	150-F625NBA	
	300...900	—	300	110/120V AC, 50/60 Hz	150-F780NBE	
				230/240V AC, 50/60 Hz	150-F780NBA	
	400...1200	—	400	110/120V AC, 50/60 Hz	150-F970NBE	
				230/240V AC, 50/60 Hz	150-F970NBA	
	533...1600	—	500	110/120V AC, 50/60 Hz	150-F1250NBE	
				230/240V AC, 50/60 Hz	150-F1250NBA	

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

△ Separate 120V or 240V single-phase power supply is required for fan operation.



SMC™ Flex Smart Motor Controllers

Product Selection

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type★
					Cat. No.
230	1.7...8.7	2.2	2	100...240V AC, 50/60 Hz	150-F5NBD
				24V AC/DC△	150-F5NBR
	8.7...43	11	15	100...240V AC, 50/60 Hz	150-F25NBD
				24V AC/DC△	150-F25NBR
	14.9...74	22	25	100...240V AC, 50/60 Hz	150-F43NBD
				24V AC/DC△	150-F43NBR
	20.8...104	30	40	100...240V AC, 50/60 Hz	150-F60NBD
				24V AC/DC△	150-F60NBR
	29.4...147	45	50	100...240V AC, 50/60 Hz	150-F85NBD
				24V AC/DC△	150-F85NBR
	47...187	55	60	100...240V AC, 50/60 Hz	150-F108NBD
				24V AC/DC△	150-F108NBR
	59...234	75	75	100...240V AC, 50/60 Hz	150-F135NBD
				24V AC/DC△	150-F135NBR
	116...348	110	125	100...240V AC, 50/60 Hz	150-F201NBD
				24V AC/DC△	150-F201NBR
	145...435	132	150	100...240V AC, 50/60 Hz	150-F251NBD
				24V AC/DC△	150-F251NBR
	183...549	160	200	100...240V AC, 50/60 Hz	150-F317NBD
				24V AC/DC△	150-F317NBR
	208...625	200	250	100...240V AC, 50/60 Hz	150-F361NBD
				24V AC/DC△	150-F361NBR
	277...831	250	350	100...240V AC, 50/60 Hz	150-F480NBD
				24V AC/DC△	150-F480NBR
	283...850	250	350	110/120V AC, 50/60 Hz	150-F625NBE
				230/240V AC, 50/60 Hz	150-F625NBA
	300...900	250	350	110/120V AC, 50/60 Hz	150-F780NBE
				230/240V AC, 50/60 Hz	150-F780NBA
	400...1200	400	400	110/120V AC, 50/60 Hz	150-F970NBE
				230/240V AC, 50/60 Hz	150-F970NBA
	533...1600	500	600	110/120V AC, 50/60 Hz	150-F1250NBE
				230/240V AC, 50/60 Hz	150-F1250NBA

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

△ Separate 120V or 240V single-phase power supply is required for fan operation.

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type★	
					Cat. No.	
400/415/460	1.7...8.7	4	5	100...240V AC, 50/60 Hz	150-F5NBD	
				24V AC/DC△	150-F5NBR	
	8.7...43	22	30	100...240V AC, 50/60 Hz	150-F25NBD	
				24V AC/DC△	150-F25NBR	
	14.9...74	37	50	100...240V AC, 50/60 Hz	150-F43NBD	
				24V AC/DC△	150-F43NBR	
	20.8...104	55	75	100...240V AC, 50/60 Hz	150-F60NBD	
				24V AC/DC△	150-F60NBR	
	29.4...147	75	100	100...240V AC, 50/60 Hz	150-F85NBD	
				24V AC/DC△	150-F85NBR	
	47...187	90	150	100...240V AC, 50/60 Hz	150-F108NBD	
				24V AC/DC△	150-F108NBR	
	59...234	132	150	100...240V AC, 50/60 Hz	150-F135NBD	
				24V AC/DC△	150-F135NBR	
	116...348	160	250	100...240V AC, 50/60 Hz	150-F201NBD	
				24V AC/DC△	150-F201NBR	
	145...435	250	350	100...240V AC, 50/60 Hz	150-F251NBD	
				24V AC/DC△	150-F251NBR	
	183...549	315	450	100...240V AC, 50/60 Hz	150-F317NBD	
				24V AC/DC△	150-F317NBR	
	208...625	355	500	100...240V AC, 50/60 Hz	150-F361NBD	
				24V AC/DC△	150-F361NBR	
	277...831	450	700	100...240V AC, 50/60 Hz	150-F480NBD	
				24V AC/DC△	150-F480NBR	
	283...850	500	700	110/120V AC, 50/60 Hz	150-F625NBE	
				230/240V AC, 50/60 Hz	150-F625NBA	
	300...900	500	700	110/120V AC, 50/60 Hz	150-F780NBE	
				230/240V AC, 50/60 Hz	150-F780NBA	
	400...1200	710	1000	110/120V AC, 50/60 Hz	150-F970NBE	
				230/240V AC, 50/60 Hz	150-F970NBA	
	533...1600	900	1400	110/120V AC, 50/60 Hz	150-F1250NBE	
				230/240V AC, 50/60 Hz	150-F1250NBA	

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

△ Separate 120V or 240V single-phase power supply is required for fan operation.



SMC™ Flex Smart Motor Controllers

Product Selection

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type★	
					Cat. No.	
500/575	1.7...8.7	5.5	7.5	100...240V AC, 50/60 Hz	150-F5NCD	
				24V AC/DC△	150-F5NCR	
	8.7...43	15	40	100...240V AC, 50/60 Hz	150-F25NCD	
				24V AC/DC△	150-F25NCR	
	14.9...74	45	60	100...240V AC, 50/60 Hz	150-F43NCD	
				24V AC/DC△	150-F43NCR	
	20.8...104	55	100	100...240V AC, 50/60 Hz	150-F60NCD	
				24V AC/DC△	150-F60NCR	
	29.4...147	90	150	100...240V AC, 50/60 Hz	150-F85NCD	
				24V AC/DC△	150-F85NCR	
	47...187	132	150	100...240V AC, 50/60 Hz	150-F108NCD	
				24V AC/DC△	150-F108NCR	
	59...234	160	200	100...240V AC, 50/60 Hz	150-F135NCD	
				24V AC/DC△	150-F135NCR	
	116...348	250	300	100...240V AC, 50/60 Hz	150-F201NCD	
				24V AC/DC△	150-F201NCR	
	145...435	315	400	100...240V AC, 50/60 Hz	150-F251NCD	
				24V AC/DC△	150-F251NCR	
	183...549	400	500	100...240V AC, 50/60 Hz	150-F317NCD	
				24V AC/DC△	150-F317NCR	
	208...625	450	600	100...240V AC, 50/60 Hz	150-F361NCD	
				24V AC/DC△	150-F361NCR	
	277...831	560	900	100...240V AC, 50/60 Hz	150-F480NCD	
				24V AC/DC△	150-F480NCR	
	283...850	560	900	110/120V AC, 50/60 Hz	150-F625NCE	
				230/240V AC, 50/60 Hz	150-F625NCA	
	300...900	630	900	110/120V AC, 50/60 Hz	150-F780NCE	
				230/240V AC, 50/60 Hz	150-F780NCA	
	400...1200	800	1300	110/120V AC, 50/60 Hz	150-F970NCE	
				230/240V AC, 50/60 Hz	150-F970NCA	
	533...1600	1100	1600	110/120V AC, 50/60 Hz	150-F1250NCE	
				230/240V AC, 50/60 Hz	150-F1250NCA	

★ Controllers rated 108 A and greater are not equipped with line and load terminal lugs. See page 20 for terminal lug kits.

‡ Motor FLA rating should fall within specified current range for unit to operate properly. Special consideration should be given when using a motor with a potentially high starting current (greater than ten times motor FLA) with the SMC Flex in the "Full Voltage" starting mode. Contact Rockwell Automation technical support for further guidance.

△ Separate 120V or 240V single-phase power supply is required for fan operation.



Combination Line-Connected Controllers — IP65 (Type 4/12) Enclosed with Fusible Disconnect or Circuit Breaker

Rated Voltage [V AC]	kW, 50 Hz	Hp, 60 Hz	Controller Current Rating [A] ‡	IP65 (Type 4/12) Enclosed Combination Controllers with Fusible Disconnect★	IP65 (Type 4/12) Enclosed Combination Controllers with Circuit Breaker★
				Cat. No.◆	Cat. No.
200	—	0.5	5	152H-F5FHD-33	153H-F5FHD-33
	—	0.75	5	152H-F5FHD-34	153H-F5FHD-34
	—	1	5	152H-F5FHD-35	153H-F5FHD-35
	—	1.5	25	152H-F25FHD-36	153H-F25FHD-36
	—	2	25	152H-F25FHD-37	153H-F25FHD-37
	—	3	25	152H-F25FHD-38	153H-F25FHD-38
	—	5	25	152H-F25FHD-39	153H-F25FHD-39
	—	5	25	152H-F25FHD-40	153H-F25FHD-40
	—	10	43	152H-F43FHD-41	153H-F43FHD-41
	—	15	60	152H-F60FHD-42	153H-F60FHD-42
	—	20	85	152H-F85FHD-43	153H-F85FHD-43
	—	25	85	152H-F85FHD-44	153H-F85FHD-44
	—	30	108	152H-F108FHD-45	153H-F108FHD-45
	—	40	135	152H-F135FHD-46	153H-F135FHD-46
	—	50	201	152H-F201FHD-47	153H-F201FHD-47
	—	60	201	152H-F201FHD-48	153H-F201FHD-48
	—	75	251	152H-F251FHD-49	153H-F251FHD-49
	—	100	317	152H-F317FHD-50	153H-F317FHD-50
	—	125	361	152H-F361FHD-51	153H-F361FHD-51
	—	150	480	152H-F480FHD-52	153H-F480FHD-52
	—	200	625	152H-F625JHD-54	153H-F625JHD-54
	—	250	780	152H-F780JHD-56	153H-F780JHD-56
230	0.37	0.5	5	152H-F5FAD-33	153H-F5FAD-33
	0.55	0.75	5	152H-F5FAD-34	153H-F5FAD-34
	0.75	1	5	152H-F5FAD-35	153H-F5FAD-35
	1.1	1.5	25	152H-F25FAD-36	153H-F25FAD-36
	1.5	2	25	152H-F25FAD-37	153H-F25FAD-37
	2.2	3	25	152H-F25FAD-38	153H-F25FAD-38
	3.7	5	25	152H-F25FAD-39	153H-F25FAD-39
	5.5	7.5	25	152H-F25FAD-40	153H-F25FAD-40
	7.5	10	43	152H-F43FAD-41	153H-F43FAD-41
	11	15	43	152H-F43FAD-42	153H-F43FAD-42
	15	20	60	152H-F60FAD-43	153H-F60FAD-43
	18.5	25	85	152H-F85FAD-44	153H-F85FAD-44
	22	30	85	152H-F85FAD-45	153H-F85FAD-45
	30	40	108	152H-F108FAD-46	153H-F108FAD-46
	37	50	135	152H-F135FAD-47	153H-F135FAD-47
	45	60	201	152H-F201FAD-48	153H-F201FAD-48
	55	75	201	152H-F201FAD-49	153H-F201FAD-49
	75	100	251	152H-F251FAD-50	153H-F251FAD-50
	90	125	317	152H-F317FAD-51	153H-F317FAD-51
	110	150	361	152H-F361FAD-52	153H-F361FAD-52
	132	200	480	152H-F480JAD-54	153H-F480FAD-54
	185	250	625	152H-F625JAD-56	153H-F625JAD-56
	220	300	780	152H-F780JAD-57	153H-F780JAD-57

★ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

‡ The nominal current rating for the combination package may differ from the controller, based on the horsepower. Consult your local Rockwell Automation sales office or Allen-Bradley distributor.

◆ Provided with Class J or L fuse clips as standard.

△ Available in IP54 (Type 12) enclosure only.



SMC™ Flex Smart Motor Controllers

Product Selection

Combination Line-Connected Controllers — IP65 (Type 4/12) Enclosed with Fusible Disconnect or Circuit Breaker, Cont.

These controllers include line and load terminations. Enclosures other than those listed are available; consult your local Rockwell Automation sales office or Allen-Bradley distributor. All Bulletin 153 catalog numbers are supplied with thermal magnetic circuit breakers.

The fusible disconnects do not come with fuses.

Rated Voltage [V AC]	kW, 50 Hz	Hp, 60 Hz	Controller Current Rating [A] ‡	IP65 (Type 4/12) Enclosed Combination Controllers with Fusible Disconnect ★		IP65 (Type 4/12) Enclosed Combination Controllers with Circuit Breaker ★
				Cat. No. ▲	Cat. No.	
400/460	0.37	0.5	5	152H-F5FBD-33		153H-F5FBD-33
	0.55	0.75	5	152H-F5FBD-34		153H-F5FBD-34
	0.75	1	5	152H-F5FBD-35		153H-F5FBD-35
	1.1	1.5	5	152H-F5FBD-36		153H-F5FBD-36
	1.5	2	5	152H-F5FBD-37		153H-F5FBD-37
	2.2	3	5	152H-F5FBD-38		153H-F5FBD-38
	3.7	5	25	152H-F25FBD-39		153H-F25FBD-39
	5.5	7.5	25	152H-F25FBD-40		153H-F25FBD-40
	7.5	10	25	152H-F25FBD-41		153H-F25FBD-41
	11	15	25	152H-F25FBD-42		153H-F25FBD-42
	15	20	43	152H-F43FBD-43		153H-F43FBD-43
	18.5	25	43	152H-F43FBD-44		153H-F43FBD-44
	22	30	43	152H-F43FBD-45		153H-F43FBD-45
	30	40	60	152H-F60FBD-46		153H-F60FBD-46
	37	50	85	152H-F85FBD-47		153H-F85FBD-47
	45	60	85	152H-F85FBD-48		153H-F85FBD-48
	55	75	108	152H-F108FBD-49		153H-F108FBD-49
	75	100	135	152H-F135FBD-50		153H-F135FBD-50
	90	125	201	152H-F201FBD-51		153H-F201FBD-51
	110	150	201	152H-F201FBD-52		153H-F201FBD-52
	132	200	251	152H-F251FBD-54		153H-F251FBD-54
	160	250	317	152H-F317FBD-56		153H-F317FBD-56
	200	300	361	152H-F361FBD-57		153H-F361FBD-57
	250	350	480	152H-F480FBD-58		153H-F480FBD-58
	250	400	480	152H-F480JBD-59		153H-F480FBD-59
	355	500	625	152H-F625JBD-61	△	153H-F625JBD-61
	450	600	780	152H-F780JBD-62	△	153H-F780JBD-62
500/575	0.55	0.75	5	152H-F5FCD-34		153H-F5FCD-34
	0.75	1	5	152H-F5FCD-35		153H-F5FCD-35
	1.1	1.5	5	152H-F5FCD-36		153H-F5FCD-36
	1.5	2	5	152H-F5FCD-37		153H-F5FCD-37
	2.2	3	5	152H-F5FCD-38		153H-F5FCD-38
	3.7	5	25	152H-F25FCD-39		153H-F25FCD-39
	5.5	7.5	25	152H-F25FCD-40		153H-F25FCD-40
	7.5	10	25	152H-F25FCD-41		153H-F25FCD-41
	11	15	25	152H-F25FCD-42		153H-F25FCD-42
	15	20	43	152H-F43FCD-43		153H-F43FCD-43
	18.5	25	43	152H-F43FCD-44		153H-F43FCD-44
	22	30	43	152H-F43FCD-45		153H-F43FCD-45
	22	40	43	152H-F43FCD-46		153H-F43FCD-46
	37	50	60	152H-F60FCD-47		153H-F60FCD-47
	45	60	85	152H-F85FCD-48		153H-F85FCD-48
	55	75	85	152H-F85FCD-49		153H-F85FCD-49
	75	100	108	152H-F108FCD-50		153H-F108FCD-50
	90	125	135	152H-F135FCD-51		153H-F135FCD-51
	110	150	201	152H-F201FCD-52		153H-F201FCD-52
	132	200	201	152H-F201FCD-54		153H-F201FCD-54
	160	250	251	152H-F251FCD-56		153H-F251FCD-56
	200	300	317	152H-F317FCD-57		153H-F317FCD-57
	250	350	361	152H-F361FCD-58		153H-F361FCD-58
	295	400	480	152H-F480JCD-59		153H-F480FCD-59
	315	450	480	152H-F480JCD-60		153H-F480FCD-60
	315	500	480	152H-F480JCD-61		153H-F480FCD-61
	450	600	625	152H-F625JCD-62	△	153H-F625JCD-62
	560	800	780	152H-F780JCD-65	△	153H-F780JCD-65

★ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

‡ The nominal current rating for the combination package may differ from the controller, based on the horsepower. Consult your local Rockwell Automation sales office or Allen-Bradley distributor.

▲ Provided with Class J or L fuse clips as standard.

△ Available in IP54 (Type 12) enclosure only.



Control Options (open and enclosed)

Option	Description	Cat. No. Modification
Pump Control	Provides smooth motor acceleration and deceleration, reducing surges caused by the starting and stopping of centrifugal pumps. Starting time is adjustable from 0...30 s, and stopping time is adjustable from 0...120 s.	B★
Braking Control	Provides Smart Motor Braking (SMB), Accu-Stop, and Slow Speed with Braking.	D★

Enclosed Options

Option	Description	Cat. No. Modification
Push Buttons	Start-Stop Push Button	-1
	Start-Stop Push Button with H-O-A Selector Switch	-1F
	Soft Stop Push Button‡	1XA
	Pump Stop Push Button‡	1XB
	Slow Speed Push Button‡	1XC
	Brake Push Button‡	1XD
	Accu-Stop/Slow Speed Push Button‡	1XE
Selector Switch	Hand-Off-Auto Selector Switch	-3
	SMC-Off-Bypass Selector Switch	-3B ▽
Pilot Lights	Transformer Pilot Light - Green Power On Indicator	-4G
	Transformer Pilot Light - Red Run Indicator	-4R
	Push-to-Test Pilot Light - Red Run Indicator	-5R
Control Circuit Transformer	Control Circuit Transformer (fused primary and secondary)	-6P
	Additional 100VA Control Circuit Transformer (fused primary and secondary)	-6PX
	1000VA Control Circuit Transformer (fused primary and secondary)	-6PK
	1600VA Control Circuit Transformer (fused primary and secondary)	-6PL
	2000VA Control Circuit Transformer (fused primary and secondary)	-6PM
Protective Modules	480V Line Side Protective Module	-8L
	600V Line Side Protective Module	
	480V Load Side Protective Module	
	600V Load Side Protective Module	-8M
	480V Both Line and Load Side Protective Modules	
	600V Both Line and Load Side Protective Modules	-8B
Human Interface Module	Door-mounted, Full Numeric (Type 4/12)	-HC3
Communication Module	RS-485	-20S
	DeviceNet	-20D
	Ethernet/IP	-20E
	Control Net	-20C
	ProfiBUS	-20P
Disconnect Auxiliary	N.O. disconnect auxiliary mounted on operating mechanism	-98
	N.C. disconnect auxiliary mounted on operating mechanism	-99
Circuit Breaker Auxiliary	Internal N.O. circuit breaker auxiliary	-98X
	Internal N.C. circuit breaker auxiliary	-99X
Service Entrance Label	Service Entrance Label	-SEL
Oil Pump Starter	Bulletin 509 NEMA Size 1starter and Bulletin 592 solid-state overload	-OPS

* Add the designated letter to the end of the cat. no. Example: To add the Pump Control option: **Cat. No. 150-F361NBDB** or **Cat. No. 152H-F361FBDB-57**.

† Option push buttons are available only when the corresponding option module is selected. Example: **Cat. No. 150-F108FBDB-1XB**.

▽ Bypass contactor and overload are not included with this option. A **-NB** or **-BP** needs to be added to the catalog string to add these devices.



SMC™ Flex Smart Motor Controllers

Modifications/Accessories

Enclosed Options, Continued

Option	Description	Cat. No. Modification
NEMA Bypass Contactor and Overload Relay	5...43 A	-NB
	60...85 A	
	108...135 A	
	201...251 A	
	317...361 A	
	480 A	
NEMA Isolation Contactor	5...43 A	-NI
	60...85 A	
	108...135 A	
	201...251 A	
	317...361 A	
	480 A	
MCS Bypass Contactor and Overload Relay	5...43 A	-BP
	60...85 A	
	108...135 A	
	201...251 A	
	317...361 A	
	480 A	


Accessories**Protective Modules★**

Protective modules must not be placed on the load side of a device when using an inside-the-delta connection or with Pump, Braking, or Linear Speed control.

	Current Rating [A]	Description	Field Modification Cat. No.
			150-F84
	5...85	480V Protective Module	150-F84L
	90...520		150-F86
	5...85	600V Protective Module	150-F86L
	90...520		150-F86L

★ The same protective module mounts on the line or load side of the SMC Flex. For applications requiring both line and load side protection, two protective modules must be ordered.

Terminal Lug Kits (108...1250 A)

	Current Rating [A] ‡	Wire Size	Total No. of Line Controller Terminal Lugs Possible Each Side		Pkg. Qty.	Cat. No.
			Line Side	Load Side		
	108...135△	#6...250 MCM AWG 16 mm ² ...120 mm ²	3	3		199-LF1
	201...251△		6	6		
	317...480△	#4...500 MCM AWG 25 mm ² ...240 mm ²	6	6		199-LG1
	625...780	2/0...500 MCM AWG	6	6		100-DL630
	970	4/0...500 MCM AWG	3	3		100-DL860
	1250‡	2/0...500 MCM AWG	3	3		100-DL630
		4/0...500 MCM AWG	3	3	3	100-DL860

Line and Load terminals are provided as standard on enclosed SMCs.

‡ 5...85 A units have box lugs standard. No additional lugs are required.

‡ The 1250 A device requires (1) 100-DL630 and (1) 100-DL860 per connection.

△ When a multi-conductor lug is required, refer to the User Manual for appropriate lug catalog number.

IEC Terminal Covers

	Description\$	Package Quantity	Field Modification Cat. No.
	IEC line or load terminal covers for 108 and 135 A devices. Dead front protection	1	150-TC1
	IEC line or load terminal covers for 201...251 A devices. Dead front protection	1	150-TC2
	IEC line or load terminal covers for 317...480 A devices. Dead front protection	1	150-TC3

\$ 5...85 A units have terminal guards standard. No additional terminal guards are required.

Human Interface and Communication Modules

	Description		Cat. No.	
	Hand-Held Human Interface Modules	LCD Display, Full Numeric Keypad*	20-HIM-A3	
		LCD Display, Programmer Only*	20-HIM-A5	
	Door-Mounted Human Interface Modules	Remote (Panel Mount) LCD Display, Full Numeric Keypad	20-HIM-C3S	
		LCD Display, Programmer Only HIM (includes 3 m cable)	20-HIM-C5S	
		PowerFlex HIM Interface Cable, 1 m (39 in)	20-HIM-H10	
		Cable Kit (Male-Female) 0.33 m (1.1 ft)	1202-H03	
	Human Interface Module Interface Cables	Cable Kit (Male-Female) 1 m (3.3 ft)	1202-H10	
		Cable Kit (Male-Female) 3 m (9.8 ft)	1202-H30	
		Cable Kit (Male-Female) 9 m (29.5 ft)	1202-H90	
		DPI/SCANport™ One to Two Port Splitter Cable	1203-S03	
	Description (IP30/Type 1)		For Use With	
	Communication Modules	RS485 DF1 Communication Adapter	Bulletin 150 SMC-Flex	20-COMM-S
		PROFIBUS™ DP Communication Adapter		20-COMM-P
		ControlNet™ Communication Adapter (Coax)		20-COMM-C
		Interbus™ Communication Adapter		20-COMM-I
		Modbus/TCP Communication Adapter		20-COMM-M
		DeviceNet™ Communication Adapter		20-COMM-D
		EtherNet/IP™ Communication Adapter		20-COMM-E
		HVAC Communication Adapter		20-COMM-H
		ControlNet™ Communication Adapter (Fiber)		20-COMM-Q
	DriveTools™	Programming Software		WIN NT/2000/XP 9303-4DTE01ENE
		DriveTools™ Sp		WIN NT/2000/XP 9303-4DTS01ENE
		AnaCANda™ RS-232 to DPI	Serial	1203-SSS
		DPI to USB	USB	1203-USB

* Requires a 20-HIM-H10 cable to connect to the SMC Flex.




SMC™ Flex Smart Motor Controllers

Specifications

Specifications

Functional Design Specifications		
Standard Features	Installation	Power Wiring Standard squirrel-cage induction motor or a Wye-Delta, six-lead motor.
		Control Wiring 2- and 3-wire control for a wide variety of applications.
	Setup	Keypad Front keypad and backlit LCD display.
		Software Parameter values can be downloaded to the SMC-Flex Controller with DriveTools programming software and the Cat. No. 20-COMM... DPI communication module.
	Communications	One DPI provided for connection to optional human interface and communication modules.
		Starting and Stopping Modes Soft Start Current Limit Start Dual Ramp Full Voltage Linear Speed Acceleration Preset Slow Speed Soft Stop
	Protection and Diagnostics	Power loss, line fault, voltage unbalance, excessive starts/hour, phase reversal, undervoltage, overvoltage, controller temp, stall, jam, open gate, overload, underload, communication fault.
	Metering	Amps, volts, kW, kWh, MW, MWH, elapsed time, power factor, motor thermal capacity usage.
	Alarm Contact	Overload, underload, undervoltage, overvoltage, unbalance, jam, stall, and ground fault
Optional Features	Status Indication	Stopped, starting, stopping, at speed, alarm, and fault.
	Auxiliary Contacts	Four fully programmable contacts as normal/up-to-speed/fault/alarm/network (N.O./N.C.), or external bypass (N.O. only).
	Pump Control	Helps reduce fluid surges in centrifugal pumping systems during starting and stopping period. Starting time is adjustable from 0...30 s. Stopping time is adjustable from 0...120 s.
	SMB Smart Motor Braking	Provides motor braking without additional equipment for applications that require the motor to stop quickly. Braking current is adjustable from 0...400% of the motor's full-load current rating.
Braking Control	Accu-Stop	Provides controlled position stopping. During stopping, braking torque is applied to the motor until it reaches preset slow speed (7% or 15% of rated speed) and holds the motor at this speed until a stop command is given. Braking torque is then applied until the motor reaches zero speed. Braking current is programmable from 0...450% of full-load current.
	Slow Speed with Braking	Used on applications that require slow speed (in the forward direction) for positioning or alignment and also require braking control to stop.

Wiring Diagram — Line Controller

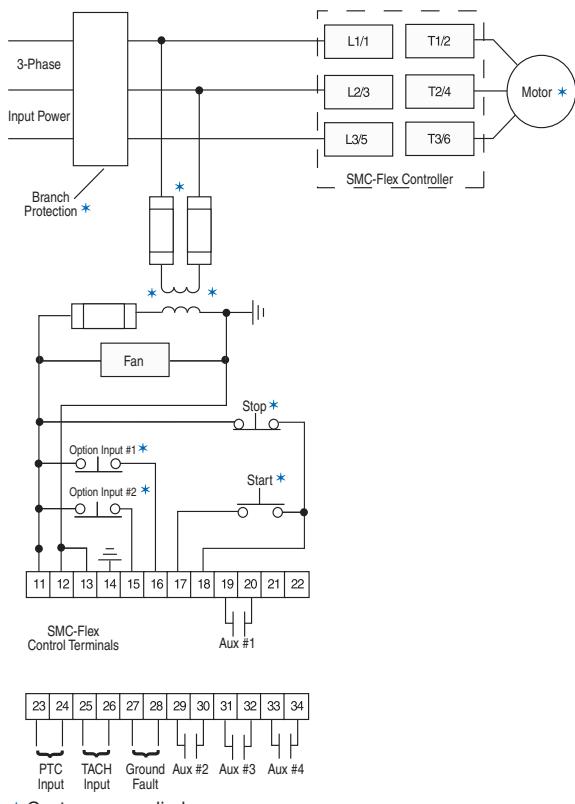

★ Customer supplied.

SMC™ Flex Smart Motor Controllers

Specifications

Electrical Ratings				
		Device Rating	UL/CSA/NEMA	IEC
Power Circuit	Rated Operation Voltage	480V	200...480V AC (-15%, +10%)	200...415V
		600V	200...600V AC (-15%, +10%)	200...500V
		690V	230...600V AC (-15%, +10%)	230...690V/Y (-15%, +10%)
	Rated Insulation Voltage	480V	N/A	500V
		600V		500V
		690V		690V
	Rated Impulse Voltage	480V	N/A	6000V
		600V		
		690V		
	Dielectric Withstand	480V	2200V AC	2500V
		600V		
		690V		
Control Circuit	Repetitive Peak Inverse Voltage Rating	480V	1400V	1400V
		600V	1600V	1600V
		690V	1800V	1800V
	Operating Frequency	All	50/60 Hz	
		5...480 A	MG 1	AC-53B:3.0-50:1750
	Protection Against Electrical Shock	625...1250 A	MG 1	AC-53B:3.0-50:3550
		5...85 A	N/A	IP20
		108...480 A		IP2X (with terminal covers)
		625...1250 A		IP00 (open device)
	DV/DT Protection	480V & 600V	RC Snubber Network	
		690V	None	
	Transient Protection	480V & 600V	Metal Oxide Varistors: 220 Joules	
		690V	None	

* 690V power is only available with 100...240V control.



SMC™ Flex Smart Motor Controllers

Specifications

Electrical Ratings							
SCPD Performance 200...600V		Type 1+△					
SCCR List★	Max. Standard Available Fault	Max. Standard Fuse [A]‡	Max. Standard Available Fault	Max. Circuit Breaker [A]	Max. High Fault	Max. Fuse [A]§	
Line Device Operational Current Rating [A]	5	5 kA	20	5 kA	20	70 kA	10
	25	5 kA	100	5 kA	100	70 kA	50
	43	10 kA	150	10 kA	150	70 kA	90
	60	10 kA	225	10 kA	225	70 kA	125
	85	10 kA	300	10 kA	300	70 kA	175
	108	10 kA	400	10 kA	300	70 kA	200
	135	10 kA	500	10 kA	400	70 kA	225
	201	18 kA	600	18 kA	600	70 kA	350
	251	18 kA	700	18 kA	700	70 kA	400
	317	30 kA	800	30 kA	800	69 kA	500
	361	30 kA	1000	30 kA	1000	69 kA	600
	480	42 kA	1200	42 kA	1200	69 kA	800
	625	42 kA	1600	42 kA	1600	74 kA	1600
	780	42 kA	1600	42 kA	2000	74 kA	1600
	970	85 kA	2500	85 kA	2500	85 kA	2500
	1250	85 kA	3000	85 kA	3200	85 kA	3000
Delta Device Operational Current Rating [A]	8.7	5 kA	35	5 kA	35	70 kA	17.5
	43	5 kA	150	5 kA	150	70 kA	90
	74	10 kA	300	10 kA	300	70 kA	150
	104	10 kA	400	10 kA	400	70 kA	200
	147	10 kA	400	10 kA	400	70 kA	200
	187	10 kA	600	10 kA	500	70 kA	300
	234	10 kA	700	10 kA	700	70 kA	400
	348	18 kA	1000	18 kA	1000	70 kA	600
	435	18 kA	1200	18 kA	1200	70 kA	800
	549	30 kA	1600	30 kA	1600	69 kA	1000
	625	30 kA	1600	30 kA	1600	69 kA	1200
	831	42 kA	1600	30 kA	1600	69 kA	1600
	850	42 kA	1600	42 kA	2000	74 kA	1600
	900	42 kA	1600	42 kA	2000	74 kA	1600
	1200	85 kA	3000	85 kA	3200	85 kA	3000
	1600	85 kA	3000	85 kA	3200	85 kA	3000
SCPD Performance 690V		Type 1+*					
SCCR List★	Device Rating	Max. Standard Available Fault	Max. Ampere Tested — North American Style		Max. Ampere Tested — European Style		
Maximum FLC	108	70 kA	A070URD33xxx500		6,9 gRB 73xxx400 6,6URD33xxx500		
	135	70 kA	A070URD33xxx500		6,9 gRB 73xxx400 6,6URD33xxx500		
	201	70 kA	A070URD33xxx700		6,9 gRB 73xxx630 6,6URD33xxx700		
	251	70 kA	A070URD33xxx700		6,9 gRB 73xxx630 6,6URD33xxx700		
	317	70 kA	A070URD33xxx900		6,9 gRB 73xxx800 6,6URD33xxx900		
	361	70 kA	A070URD33xxx900		6,9 gRB 73xxx800 6,6URD33xxx900		
	480	70 kA	A070D33xxx1250 A100URD73xxx1250		9 URD 73xxx1250 6,6URD33xxx1250		
	625	70 kA	A070URD33xxx1400		6,6URD33xxx1400		
	780	70 kA	A070URD33xxx1400		6,6URD33xxx1400		
	970	85 kA	Two fuses in parallel A070URD33xxx1250		Two fuses in parallel 6,6URD33xxx1250		
	1250	85 kA	Two fuses in parallel A070URD33xxx1250		Two fuses in parallel 6,6URD33xxx1250		

★ Consult local codes for proper sizing of short circuit protection.

‡ Non-time delay fuses (K5 — 5...480V (8.7...831 A) devices; Class L — 625...1250V (850...1600 A) devices).

§ High capacity fault rating when used with time delay class CC, J, or L fuses.

▲ Type 1 performance/protection indicates that, under a short-circuit condition, the fused or circuit breaker-protected starter shall cause no danger to persons or installation but may not be suitable for further service without repair or replacement.

△ For short-circuit current rating (SCCR) for enclosed panel with external bypass or isolation contactor, see the Industrial Controls catalog website: www.ab.com/catalogs.

Bulletin 150
SMC™ Flex Smart Motor Controllers
 Specifications

Electrical Ratings							
Power Requirements	Control Module	1...480 A	120...240V AC	Transformer	75 VA		
			24V AC	Transformer	130 VA		
			24V DC	Inrush Current	5 A		
				Inrush Time	250 ms		
				Transient Watts	60 W		
			24V DC	Transient Time	500 ms		
				Steady State Watts	24 W		
				Minimum Allen-Bradley Power Supply	1606-XLP50E		
			625...1250 A	751 VA (recommended 800 VA)			
			5...135 A, 20 VA				
			201...251 A, 40 VA				
			317...480 A, 60 VA				
			625...1250 A, 150 VA				
Steady State Heat Dissipation with Control and Fan Power (Watts)	Controller Rating [A]		5	70			
			25	70			
			43	81			
			60	97			
			85	129			
			108	91			
			135	104			
			201	180			
			251	198			
			317	225			
			361	245			
			480	290			
			625	446			
			780	590			
			970	812			
			1250	1222			
Auxiliary Contacts 19/20 (Aux #1) 29/30 (Aux #2) 31/32 (Aux #3) 33/34 (Aux #4)	Type of Control Circuit	Electromagnetic relay					
	Number of Contacts	1					
	Type of Contacts	programmable N.O./N.C.					
	Type of Current	AC					
	Rated Operational Current	3 A @ 120V AC, 1.5 A @ 240V AC					
	Conventional Thermal Current/ I_{th} AC/DC	5 A					
	Make/Break VA	3600/360					
	Utilization Category	AC-15/DC					
PTC Input Ratings	Response Resistance	$3400 \Omega \pm 150 \Omega$					
	Reset Resistance	$1600 \Omega \pm 100 \Omega$					
	Short-Circuit Trip Resistance	$25 \Omega \pm 10 \Omega$					
	Max. Voltage at PTC Terminals ($R_{PTC} = 4 \text{ k}\Omega$)	< 7.5V					
	Max. Voltage at PTC Terminals ($R_{PTC} = \text{open}$)	30V					
	Max. No. of Sensors.	6					
	Max. Cold Resistance of PTC Sensor Chain	1500 Ω					
	Response Time	800 ms					
Tach Input		0...5V DC, 4.5V DC = 100% Speed					

△ Heatsink fans can be powered by either 110/120V AC or 220/240V AC.



Allen-Bradley

www.ab.com/catalogs

Publication 150-SG009F-EN-P

SMC™ Flex Smart Motor Controllers

Specifications

Environmental			
Operating Temperature Range			-5...+50 °C (23...+122 °F) (open) -5...+40 °C (23...+104 °F) (enclosed)
Storage and Transportation Temperature Range			-20...+75 °C (-4...167 °F)
Altitude			2000 m (6560 ft)
Humidity			5...95% (non-condensing)
Pollution Degree			2
Mechanical			
Resistance to Vibration	Operational	All	1.0 G Peak, 0.15 mm (0.006 in.) displacement
	Non-Operational	5...480 A	2.5 G Peak, 0.38 mm (0.015 in.) displacement
		625...1250 A	1.0 G Peak, 0.15 mm (0.006 in.) displacement
Resistance to Shock	Operational	5...85 A	15 G
		108...480 A	5.5 G
		625...1250 A	4 G
	Non-Operational	5...85 A	30 G
		108...480 A	25 G
		625...1250 A	12 G
Construction	Power Poles	5...85 A	Heatsink thyristor modular design
	Power Poles	108...1250 A	Heatsink hockey puck thyristor modular design
	Control Modules	Thermoset and Thermoplastic Moldings	
	Metal Parts	Plated Brass, Copper, or Painted Steel	
Terminals	Power Terminals	5...85 A	Cable size — Line Upper — 2.5...95 mm ² (14...3/0 AWG) Line Lower — 0.8...2.5 mm ² (18...14 AWG) Load Upper — 2.5...50 mm ² (14...1 AWG) Load Lower — 0.8...2.5 mm ² (18...14 AWG) Tightening torque — 14.7 N•m (130 lb.-in.)
		108...135 A	One M10 x 1.5 diameter hole per power pole
		201...251 A	Two M10 x 1.5 diameter holes per power pole
		317...480 A	Two M12 x 1.75 diameter holes per power pole
		625...1250 A	Two 13.5 mm (0.53 in.) diameter holes per power pole
	Power Terminal Markings		NEMA, CENELEC EN50 012
	Control Terminals	M3 screw clamp	Clamping yoke connection
Other			
EMC Emission Levels	Conducted Radio Frequency Emissions Radiated Emissions		Class A Class A
EMC Immunity Levels	Electrostatic Discharge Radio Frequency Electromagnetic Field Fast Transient Surge Transient		8 kV Air Discharge Per EN/IEC 60947-4-2 Per EN/IEC 60947-4-2 Per EN/IEC 60947-4-2
Overload Characteristics	Current Range [A]	5	Line Delta
		1...5	1.7...9
		25	5...25
		43	8.6...43
		60	12...60
		85	17...85
		108	27...108
		135	34...135
		201	67...201
		251	84...251
		317	106...317
		361	120...361
		480	160...480
		625	208...625
		780	260...780
		970	323...970
		1250	416...1250
	Trip Classes Trip Current Rating Number of Poles		10, 15, 20, and 30 117% of Motor FLC 3
Certifications	Open-Type Controllers		CE Marked Per Low Voltage Directive 73/23/EEC, 93/68/EEC UL Listed (File No. E96956)

Approximate Dimensions and Shipping Weights**Open Type Controllers**

Dimensions are in millimeters (inches).

Dimensions are not intended for manufacturing purposes.

Rating [A]	Height	Width	Depth	Weight
5...85	321 (12.6)	150 (5.9)	203 (8.0)	5.7 kg (12.6 lbs)
108...135	443.7 (17.47)	196.4 (7.74)	205.2 (8.08)	15.0 kg (33 lbs)
201...251	560 (22.05)	225 (8.86)	253.8 (9.99)	30.4 kg (67 lbs)
317...480	600 (23.62)	290 (11.42)	276.5 (10.89)	45.8 kg (101 lbs)
625...780	1041.1 (41.0)	596.9 (23.5)	346.2 (13.63)	179 kg (395 lbs)
970...1250	1041.1 (41.0)	596.9 (23.5)	346.2 (13.63)	224 kg (495 lbs)

Enclosed-Type Line-Connected Controllers

Factory-installed options may affect enclosure size requirements.

Exact dimensions can be obtained after order entry. Please consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Dimensions are in millimeters (inches). Dimensions are not intended for manufacturing purposes.

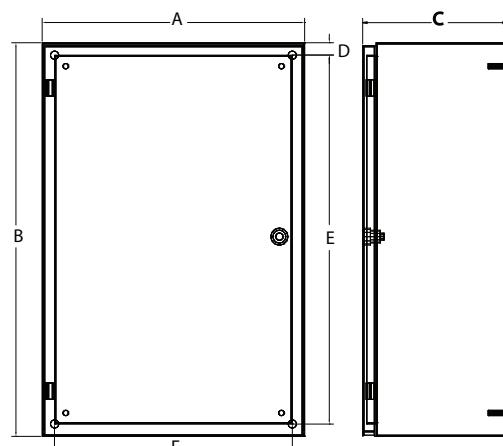


Figure 1 — Wall-Mount

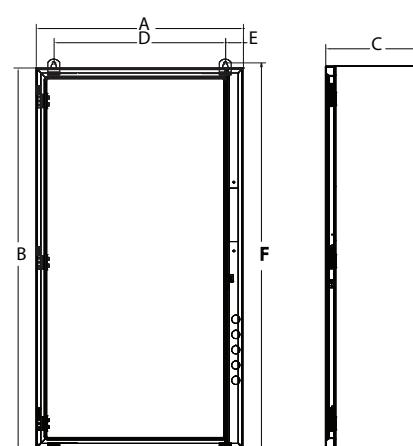


Figure 2 — Wall-Mount

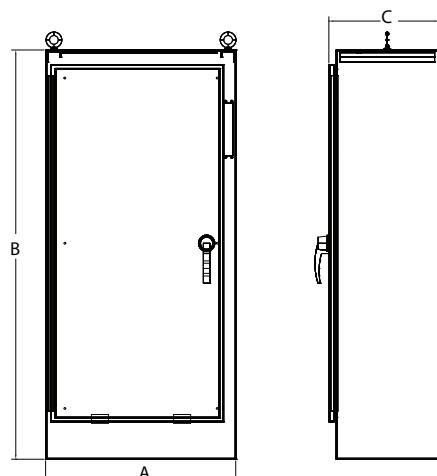


Figure 3 — Floor-Mount

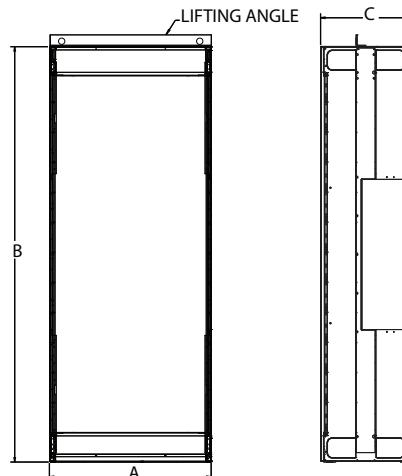


Figure 4 — Floor-Mount



SMC™ Flex Smart Motor Controllers

Approximate Dimensions

Controller Rating [A]	Bulletin	With Option	Dimension Figure No.	Dimensions in inches (mm)					
				A (Width)	B (Height)	C (Depth)	D (Mtg. Dim.)	E (Mtg. Dim.)	F (Mtg. Dim.)
SMC-Flex Combination Controller									
5...25	152H,152B,153H,153B	— BP,NB,NI,6_	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
43	152H,152B,153H,153B	— BP, 6_ NI, NB	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				153H,153B	—	16 (406)		22.5 (572)	14.5 (368)
60	152H,153H,153B	6_	1	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				152H,152B,153H,153B	NI, NB	30 (762)		36.5 (927)	28.5 (724)
85	153H,153B	— 152H,152B 6_	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
				24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				152H,152B,153B	BP,NB,NI	30 (762)		36.5 (927)	28.5 (724)
108	152H,153H	— 6_	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
135	152H,153H	— 6_	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
201	152H,153H	— 6_	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
251	152H,153H	— 6_	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
				30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
317	153H	BP,NB,NI	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
		153B	1	36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
				36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
361	152H,152B	— 6_	2	38 (965)	60 (1524)	17 (431)	33.88 (861)	58.5 (1486)	34.5 (876)
				38 (965)	60 (1524)	17 (431)		58.5 (1486)	34.5 (876)
				38 (965)	60 (1524)	17 (431)		58.5 (1486)	34.5 (876)
		152H,152B,153B	3	40 (1016)	84 (2134)	18 (457)		—	—
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
				36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
480	153H	BP	1	36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
				36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
				36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
		153B	2	36 (914)	60 (1524)	17 (431)		1.75 (45)	61.69 (1567)
				38 (965)	60 (1524)	17 (431)		1.75 (45)	61.69 (1567)
				38 (965)	60 (1524)	17 (431)		1.75 (45)	61.69 (1567)
625	152H,152B,153H,153B	BP,NI	3	40 (1016)	84 (2134)	18 (457)	33.88 (861)	49.5 (1257)	34.5 (876)
				40 (1016)	84 (2134)	18 (457)		49.5 (1257)	34.5 (876)
				40 (1016)	84 (2134)	18 (457)		58.5 (1486)	34.5 (876)
		152H	4	20 (508)	91.5 (2324)	20 (508)		—	—
				3★‡	40 (1016)	84 (2134)		1.75 (45)	61.69 (1567)
				3★‡	40 (1016)	84 (2134)		1.75 (45)	61.69 (1567)
780	152H,152B,153H,153B	BP,NB,NI,6_	3	20 (508)	91.5 (2324)	20 (508)	—	—	—
				20 (508)	91.5 (2324)	20 (508)		—	—
				20 (508)	91.5 (2324)	20 (508)		—	—
		153H,153B	4	55 (1397)	91.5 (2324)	20 (508)		—	—
				55 (1397)	91.5 (2324)	20 (508)		—	—
				55 (1397)	91.5 (2324)	20 (508)		—	—

* Assumed line voltage to be 480V AC. Different voltage may necessitate a bigger enclosure size. Consult your local Rockwell Automation sales office or Allen-Bradley distributor.

† 350 Hp max.

‡ 150 Hp @ 208V AC, 350 Hp @480V, 400...450 Hp @ 600V

▲ 200 Hp @ 240V AC, 400 Hp @480V, 500 Hp @ 600V



SMC™ Flex Smart Motor Controllers

Approximate Dimensions

Controller Rating [A]	Bulletin	With Option	Dimension Figure No.	Dimensions in inches (mm)					
				A (Width)	B (Height)	C (Depth)	D (Mtg. Dim.)	E (Mtg. Dim.)	F (Mtg. Dim.)
Non-Combination Controller									
5...43	150	—	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
		6_	1★	16 (406)	24 (610)	10 (254)		22.5 (572)	14.5 (368)
		BP	1	24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	150, 150B	NB,NI	1	24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
60	150	NB,6P_	1‡	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	150	—	1	16 (406)	24 (610)	10 (254)		22.5 (572)	14.5 (368)
	150B	—		24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	BP	—		24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	150	6_	1‡	24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	NB	—	1	24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	150, 150B	NI		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
85	150	—	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
	150B	—		24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	BP	—		24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	150	NB		24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	6_	—	1‡	24 (610)	30 (762)	12 (305)		28.5 (724)	22.5 (572)
	150, 150B	NB,NI,6P_	1‡	30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
108	150	—	1	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
	BP	—		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	NB	—		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	150B	—		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	NB,NI	—		36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
	150	—	1	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
135	BP	—		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	150B	—		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	150	NB		30 (762)	38 (965)	14 (356)		36.5 (927)	28.5 (724)
	150B	NB,NI		36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
201	150	—	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	150,150B	NB,NI,BP;6_		36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
251	150	—	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	150,150B	NB,NI,BP;6_		36 (914)	51 (1295)	14 (356)		49.5 (1257)	34.5 (876)
317	150	NB,NI,BP;6_	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
	150B	NB,NI,BP;6_		36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
361	150	NB,NI,BP;6_	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
	150B	NB,NI,BP;6_		36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
480	150	—	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
	150, 150B	BP;NB,NI		36 (914)	60 (1524)	14 (356)		58.5 (1486)	34.5 (876)
625	150	—	4	35 (889)	91.5 (2324)	20 (508)	—	—	—
	BP;NB	—		60 (1524)	91.5 (2324)	20 (508)			
	150B	—		60 (1524)	91.5 (2324)	20 (508)			
	NB	—		90 (2286)	91.5 (2324)	20 (508)			
780	150	—	4	35 (889)	91.5 (2324)	20 (508)	—	—	—
	BP;NB	—		60 (1524)	91.5 (2324)	20 (508)			
	150B	—		60 (1524)	91.5 (2324)	20 (508)			
	NB	—		90 (2286)	91.5 (2324)	20 (508)			

* Extra capacity transformer may require a larger enclosure; consult your local Rockwell Automation sales office or Allen-Bradley distributor.

† 1 kVA control transformers or larger extra capacity transformers may require a larger enclosure; consult your local Rockwell Automation sales office or Allen-Bradley distributor.



SMC™-3 Smart Motor Controllers

Overview

	<p>Bulletin 150 — Smart Motor Controllers — SMC™-3 Smart Motor Controller</p> <p>The SMC-3 is a compact, simple to use, solid-state motor controller designed to operate 3-phase motors. It features a built-in overload relay and a built-in SCR bypass contactor on all three phases, allowing a smaller footprint than other soft starters on the market. This product is designed for many applications, including compressors, chillers, pumps, conveyors, and crushers. Modes of operation for the controller are as follows:</p> <ul style="list-style-type: none"> • Soft Start • Current Limit Start • Soft Stop • Kick Start <p>The controllers offer two voltage ranges: 200...480V AC and 200...600V AC. All voltage ranges will operate at either 50 or 60 Hz.</p> <ul style="list-style-type: none"> • 1...480 A Range • Built-In Electronic Motor Overload Protection • Built-In SCR/Run Bypass • Delta Compatibility 	<p>Table of Contents</p> <table border="0"> <tr> <td>Cat. No. Explanation</td> <td>31</td> </tr> <tr> <td>Product Selection</td> <td>32</td> </tr> <tr> <td>Typical Wiring Diags.</td> <td>44</td> </tr> <tr> <td>Specifications.....</td> <td>46</td> </tr> <tr> <td>Approx. Dimensions .</td> <td>50</td> </tr> <tr> <td>Enclosed Options</td> <td>42</td> </tr> <tr> <td>Accessories.....</td> <td>42</td> </tr> </table>	Cat. No. Explanation	31	Product Selection	32	Typical Wiring Diags.	44	Specifications.....	46	Approx. Dimensions .	50	Enclosed Options	42	Accessories.....	42
Cat. No. Explanation	31															
Product Selection	32															
Typical Wiring Diags.	44															
Specifications.....	46															
Approx. Dimensions .	50															
Enclosed Options	42															
Accessories.....	42															

This catalog is based on the **minimum** information needed to select an SMC soft starter for applications with low starting torque requirements. For product selection involving loads with high starting torque requirements (large fan, rock crusher, chipper, etc.), use of the free tools available from the Rockwell Automation Website is recommended:

http://www.ab.com/industrialcontrols/products/solid-state_motor_control/software/

Standards Compliance

UL 508
CSA C22.2 No.14
EN/IEC 60947-1
EN/IEC 60947-4-2

Modes of Operation

- Soft Start
- Current Limit Start
- Selectable Kickstart
- Soft Stop

Note: For detailed information about the different modes of operation, see page 4

Description of Features**Electronic Motor Overload Protection**

The SMC-3 controller incorporates, as standard, electronic motor overload protection. This motor overload protection is accomplished electronically with the use of current transformers on each of the three phases. The controller's overload protection is programmable, providing the user with flexibility. The overload trip class selection consists of either OFF, 10, 15, or 20. The trip current is easily selected by adjusting the rotary potentiometer to the motor full-load current rating. Trip reset is selectable to either automatic or manual mode.

Note: Trip rating is 120% of dial setting.

Over-temperature

The SMC-3 monitors the SCR temperature by means of internal thermistors. When the power poles maximum rated temperature is reached, the microcomputer switches off the SMC, a TEMP fault is indicated via LED, and the 97/98 fault contact closes.

Phase Reversal Protection

When enabled via a DIP switch, 3-phase input power will be verified before starting. If input power phasing is detected to be incorrect, the start will be aborted and a fault indicated.

Phase Loss/Open Load

The unit will not attempt a start if there is a single-phase condition on the line. This protects from motor burnout during single-phase starting.

Certifications

cULus Listed (Open Type) (File No. E96956, Guides NMFT, NMFT7)
CSA Certified (File No. LR 1234)
CE Marked (Open Type) per EMC and Low Voltage Directive
CCC Certified

Phase Imbalance

The unit monitors for imbalance between phase currents. To prevent motor damage, the unit will trip if the difference between the minimum phase current and the maximum phase current exceeds 65% for 3 s, and a fault will be indicated.

Shorted SCR

Prior to every start and during starting, the unit will check all SCRs for shorts and unit load connections to the motor. If there is a shorted SCR in the SMC-3 and/or open load, the start will be aborted and a shorted SCR or open load fault will be indicated. This prevents damage from phase imbalance.

Push to Test

The unit with control wiring can be tested for fault conditions by using the Push to Test function. Hold down the Reset button for 7 s to activate the fault Aux (97, 98) and shut down the SMC-3. To clear, either push the Reset button or cycle control power to the device.

LED Description (Number of Flashes)

1. Overload
2. Overtemperature
3. Phase Reversal
4. Phase Loss/Open Load
5. Phase Imbalance
6. Shorted SCR
7. Test

Cat. No. Explanation

Open and Non-Combination

150 - C 30 F B D - 8L

a b c d e f g

a

Bulletin Number	
Code	Description
150	Solid-State Controller

b

Controller Type	
Code	Description
C	SMC-3

c

Ampere Ratings	
Code	Description
3	3 A
9	9 A
16	16 A
19	19 A
25	25 A
30	30 A
37	37 A
43	43 A
60	60 A
85	85 A
108	108 A
135	135 A
201	201 A
251	251 A
317	317 A
361	361 A
480	480 A

d

Enclosure Type	
Code	Description
N	Open
F	NEMA 4/12 (IP65)

f

Control Voltage	
Code	Description
D	100...240V AC
R	24V AC/DC (Open Type only)

g

Options (see page 42 for a full listing)	
Code	Description
8L	Line Mounted Protective Module (Enclosed Type only)
Load-side MOVs are not available when used with inside-the-delta connections. MOVs can be field installed for open type units.	

Combination

152H - C 30 F BD 43 - 8L

a b c d e f g

a

Bulletin Number	
Code	Description
152H	Solid-State Controller with Fusible Disconnect
153H	Solid-State Controller with Circuit Breaker

b

Controller Type	
Code	Description
C	SMC-3

c

Ampere Ratings	
Code	Description
3	3 A
9	9 A
16	16 A
19	19 A
25	25 A
30	30 A
37	37 A
43	43 A
60	60 A
85	85 A
108	108 A
135	135 A
201	201 A
251	251 A
317	317 A
361	361 A
480	480 A

e

Input Line Voltage Open Type	
Code	Description
HD	200...208V AC, 3-Phase, 50/60 Hz
AD	230V AC, 3-Phase, 50/60 Hz
BD	400...460V AC, 3-Phase, 50/60 Hz
CD	500...575V AC, 3-Phase, 50/60 Hz

g

Options (see page 42 for a full listing)	
Code	Description
8L	Line Mounted Protective Module (Enclosed Type only)
Load-side MOVs are not available when used with inside-the-delta connections.	

f

Horsepower									
Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating	Cat. No.	Hp Rating
33	0.5	39	5	46	40	52	150	60	450
34	0.75	40	7.5	47	50	54	200	61	500
35	1	41	10	48	60	56	250	62	600
36	1.5	42	15	49	75	57	300	63	700
37	2	43	20	50	100	58	350	65	800
38	3	44	25	51	125	59	400	67	1000
—	—	45	30	—	—	—	—	—	—

d

Enclosure Type	
Code	Description
F	NEMA Type 4/12 (IP65)
J	NEMA Type 12 (IP54)
X	NEMA Type 3R (IP44)



Allen-Bradley

www.ab.com/catalogs

Publication 150-SG009F-EN-P

SMC™-3 Smart Motor Controllers

Product Selection

Open Type and Non-Combination Enclosed (IP65, NEMA 4/12) Controllers — For use with Line-Connected Motors

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors	IP65 (Type 4/12) Enclosed Non-Combination Controllers◆
					Cat. No.	Cat. No.
200/208	1...3	—	0.5	100...240V AC, 50/60 Hz	150-C3NBD	150-C3FHD
		—		24V AC/DC	150-C3NBR	—
	3...9	—	0.75...2	100...240V AC, 50/60 Hz	150-C9NBD	150-C9FHD
		—		24V AC/DC	150-C9NBR	—
	5.3...16	—	1.5...3	100...240V AC, 50/60 Hz	150-C16NBD	150-C16FHD
		—		24V AC/DC	150-C16NBR	—
	6.3...19	—	1.5...3	100...240V AC, 50/60 Hz	150-C19NBD	150-C25FHD
		—		24V AC/DC	150-C19NBR	—
	9.2...25	—	3...7.5	100...240V AC, 50/60 Hz	150-C25NBD	150-C25FHD
		—		24V AC/DC	150-C25NBR	—
	10...30	—	3...7.5	100...240V AC, 50/60 Hz	150-C30NBD	150-C30FHD
		—		24V AC/DC	150-C30NBR	—
200/208	12.3...37	—	5...10	100...240V AC, 50/60 Hz	150-C37NBD	150-C37FHD
		—		24V AC/DC	150-C37NBR	—
	14.3...43	—	5...10	100...240V AC, 50/60 Hz	150-C43NBD	150-C43FHD
		—		24V AC/DC	150-C43NBR	—
	20...60	—	7.5...15	100...240V AC, 50/60 Hz	150-C60NBD	150-C60FHD
		—		24V AC/DC	150-C60NBR	—
	28.3...85	—	10...25	100...240V AC, 50/60 Hz	150-C85NBD	150-C85FHD
		—		24V AC/DC	150-C85NBR	—
	27...108	—	20...30	100...240V AC, 50/60 Hz	150-C108NBD	150-C108FHD
		—		24V AC/DC△	150-C108NBR	—
200/208	34...135	—	25...40	100...240V AC, 50/60 Hz	150-C135NBD	150-C135FHD
		—		24V AC/DC△	150-C135NBR	—
	67...201	—	40...60	100...240V AC, 50/60 Hz	150-C201NBD	150-C201FHD
		—		24V AC/DC△	150-C201NBR	—
	84...251	—	50...75	100...240V AC, 50/60 Hz	150-C251NBD	150-C251FHD
		—		24V AC/DC△	150-C251NBR	—
	106...317	—	60...100	100...240V AC, 50/60 Hz	150-C317NBD	150-C317FHD
		—		24V AC/DC△	150-C317NBR	—
	120...361	—	75...125	100...240V AC, 50/60 Hz	150-C361NBD	150-C361FHD
		—		24V AC/DC△	150-C361NBR	—
	160...480	—	100...150	100...240V AC, 50/60 Hz	150-C480NBD	150-C480FHD
		—		24V AC/DC△	150-C480NBR	—

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

◆ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single phase is required for fan operation.



**Open Type and Non-Combination Enclosed (IP65, NEMA 4/12) Controllers — For use with Line-Connected Motors,
Continued**

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors	IP65 (Type 4/12) Enclosed Non-Combination Controllers◆
					Cat. No.	Cat. No.
230	1...3	0.55	0.5	100...240V AC, 50/60 Hz	150-C3NBD	150-C3FAD
				24V AC/DC	150-C3NBR	—
	3...9	2.2	0.75...2	100...240V AC, 50/60 Hz	150-C9NBD	150-C9FAD
				24V AC/DC	150-C9NBR	—
	5.3...16	4	1.5...5	100...240V AC, 50/60 Hz	150-C16NBD	150-C16FAD
				24V AC/DC	150-C16NBR	—
	6.3...19	4	2...5	100...240V AC, 50/60 Hz	150-C19NBD	150-C25FAD
				24V AC/DC	150-C19NBR	—
	9.2...25	5.5	3...7.5	100...240V AC, 50/60 Hz	150-C25NBD	150-C25FAD
				24V AC/DC	150-C25NBR	—
208	10...30	7.5	5...10	100...240V AC, 50/60 Hz	150-C30NBD	150-C30FAD
				24V AC/DC	150-C30NBR	—
	12.3...37	7.5	5...10	100...240V AC, 50/60 Hz	150-C37NBD	150-C37FAD
				24V AC/DC	150-C37NBR	—
	14.3...43	11	5...15	100...240V AC, 50/60 Hz	150-C43NBD	150-C43FAD
				24V AC/DC	150-C43NBR	—
	20...60	15	7.5...20	100...240V AC, 50/60 Hz	150-C60NBD	150-C60FAD
				24V AC/DC	150-C60NBR	—
	28.3...85	22	15...30	100...240V AC, 50/60 Hz	150-C85NBD	150-C85FAD
				24V AC/DC	150-C85NBR	—
240	27...108	30	20...40	100...240V AC, 50/60 Hz	150-C108NBD	150-C108FAD
				24V AC/DC△	150-C108NBR	—
	34...135	37	25...50	100...240V AC, 50/60 Hz	150-C135NBD	150-C135FAD
				24V AC/DC△	150-C135NBR	—
	67...201	55	40...75	100...240V AC, 50/60 Hz	150-C201NBD	150-C201FAD
				24V AC/DC△	150-C201NBR	—
	84...251	75	50...100	100...240V AC, 50/60 Hz	150-C251NBD	150-C251FAD
				24V AC/DC△	150-C251NBR	—
	106...317	90	60...125	100...240V AC, 50/60 Hz	150-C317NBD	150-C317FAD
				24V AC/DC△	150-C317NBR	—
	120...361	110	75...150	100...240V AC, 50/60 Hz	150-C361NBD	150-C361FAD
				24V AC/DC△	150-C361NBR	—
	160...480	132	100...200	100...240V AC, 50/60 Hz	150-C480NBD	150-C480FAD
				24V AC/DC△	150-C480NBR	—

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

◆ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single phase is required for fan operation.



SMC™-3 Smart Motor Controllers

Product Selection

Open Type and Non-Combination Enclosed (IP65, NEMA 4/12) Controllers — For use with Line-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]†	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors	IP65 (Type 4/12) Enclosed Non-Combination Controllers‡
					Cat. No.	Cat. No.
380/400/ 415/460	1...3	1.1	0.5...1.5	100...240V AC, 50/60 Hz	150-C3NBD	150-C3FBD
				24V AC/DC	150-C3NBR	—
	3...9	4	1.5...5	100...240V AC, 50/60 Hz	150-C9NBD	150-C9FBD
				24V AC/DC	150-C9NBR	—
	5.3...16	7.5	5...10	100...240V AC, 50/60 Hz	150-C16NBD	150-C16FBD
				24V AC/DC	150-C16NBR	—
	6.3...19	7.5	5...10	100...240V AC, 50/60 Hz	150-C19NBD	150-C19NBR
				24V AC/DC	150-C19NBR	—
	9.2...25	11	7.5...15	100...240V AC, 50/60 Hz	150-C25NBD	150-C25NBR
				24V AC/DC	150-C25NBR	—
10...30	10...30	15	7.5...20	100...240V AC, 50/60 Hz	150-C30NBD	150-C30FBD
				24V AC/DC	150-C30NBR	—
	12.3...37	18.5	10...25	100...240V AC, 50/60 Hz	150-C37NBD	150-C37FBD
				24V AC/DC	150-C37NBR	—
	14.3...43	22	10...30	100...240V AC, 50/60 Hz	150-C43NBD	150-C43FBD
				24V AC/DC	150-C43NBR	—
	20...60	30	15...40	100...240V AC, 50/60 Hz	150-C60NBD	150-C60FBD
				24V AC/DC	150-C60NBR	—
	28.3...85	45	25...60	100...240V AC, 50/60 Hz	150-C85NBD	150-C85FBD
				24V AC/DC	150-C85NBR	—
67...201	27...108	55	50...75	100...240V AC, 50/60 Hz	150-C108NBD	150-C108FBD
				24V AC/DC△	150-C108NBR	—
	34...135	75	60...100	100...240V AC, 50/60 Hz	150-C135NBD	150-C135FBD
				24V AC/DC△	150-C135NBR	—
	67...201	95...110	75...150	100...240V AC, 50/60 Hz	150-C201NBD	150-C201FBD
				24V AC/DC△	150-C201NBR	—
	84...251	95...132	100...200	100...240V AC, 50/60 Hz	150-C251NBD	150-C251FBD
				24V AC/DC△	150-C251NBR	—
	106...317	95...160	125...250	100...240V AC, 50/60 Hz	150-C317NBD	150-C317FBD
				24V AC/DC△	150-C317NBR	—
120...361	110...200	250...300	100...240V AC, 50/60 Hz	150-C361NBD	150-C361FBD	
				24V AC/DC△	150-C361NBR	—
160...480	160...250	300...400	100...240V AC, 50/60 Hz	150-C480NBD	150-C480FBD	
				24V AC/DC△	150-C480NBR	—

† Motor FLA rating should fall within specified current range for unit to operate properly.

‡ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single phase is required for fan operation.



**Open Type and Non-Combination Enclosed (IP65, NEMA 4/12) Controllers — For use with Line-Connected Motors,
Continued**

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type — Line-Connected Motors	IP65 (Type 4/12) Enclosed Non-Combination Controllers◆
					Cat. No.	Cat. No.
500/575	1...3	1.5	0.75...2	100...240V AC, 50/60 Hz	150-C3NCD	150-C3FCD
				24V AC/DC	150-C3NCR	—
	3...9	5.5	3...7.5	100...240V AC, 50/60 Hz	150-C9NCD	150-C9FCD
				24V AC/DC	150-C9NCR	—
	5.3...16	7.5	5...10	100...240V AC, 50/60 Hz	150-C16NCD	150-C16FCD
				24V AC/DC	150-C16NCR	—
	6.3...19	11	7.5...15	100...240V AC, 50/60 Hz	150-C19NCD	150-C25FCD
				24V AC/DC	150-C19NCR	—
	9.2...25	15	7.5...20	100...240V AC, 50/60 Hz	150-C25NCD	150-C25FCD
				24V AC/DC	150-C25NCR	—
500/575	10...30	18.5	10...25	100...240V AC, 50/60 Hz	150-C30NCD	150-C30FCD
				24V AC/DC	150-C30NCR	—
	12.3...37	22	15...30	100...240V AC, 50/60 Hz	150-C37NCD	150-C37FCD
				24V AC/DC	150-C37NCR	—
	14.3...43	22	15...40	100...240V AC, 50/60 Hz	150-C43NCD	150-C43FCD
				24V AC/DC	150-C43NCR	—
	20...60	37	20...50	100...240V AC, 50/60 Hz	150-C60NCD	150-C60FCD
				24V AC/DC	150-C60NCR	—
	28.3...85	55	30...75	100...240V AC, 50/60 Hz	150-C85NCD	150-C85FCD
				24V AC/DC	150-C85NCR	—
500/575	27...108	75	60...100	100...240V AC, 50/60 Hz	150-C108NCD	150-C108FCD
				24V AC/DC△	150-C108NCR	—
	34...135	90	75...125	100...240V AC, 50/60 Hz	150-C135NCD	150-C135FCD
				24V AC/DC△	150-C135NCR	—
	67...201	75...132	100...200	100...240V AC, 50/60 Hz	150-C201NCD	150-C201FCD
				24V AC/DC△	150-C201NCR	—
	84...251	90...160	125...250	100...240V AC, 50/60 Hz	150-C251NCD	150-C251FCD
				24V AC/DC△	150-C251NCR	—
	106...317	100...200	200...300	100...240V AC, 50/60 Hz	150-C317NCD	150-C317FCD
				24V AC/DC△	150-C317NCR	—
500/575	120...361	132...250	200...350	100...240V AC, 50/60 Hz	150-C361NCD	150-C361FCD
				24V AC/DC△	150-C361NCR	—
500/575	160...480	200...315	250...500	100...240V AC, 50/60 Hz	150-C480NCD	150-C480FCD
				24V AC/DC△	150-C480NCR	—

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

◆ These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

△ Separate 120V or 240V single phase is required for fan operation.



SMC™-3 Smart Motor Controllers

Product Selection

Open Type Controllers — For use with Delta-Connected Motors

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type
					Cat. No.
200/208	1.7...5.1	—	1	100...240V AC, 50/60 Hz	150-C3NBD
		—		24V AC/DC	150-C3NBR
	5.1...16	—	1.5...3	100...240V AC, 50/60 Hz	150-C9NBD
		—		24V AC/DC	150-C9NBR
	9.1...27.6	—	3...7.5	100...240V AC, 50/60 Hz	150-C16NBD
		—		24V AC/DC	150-C16NBR
	10.9...32.8	—	3...10	100...240V AC, 50/60 Hz	150-C19NBD
		—		24V AC/DC	150-C19NBR
	14.3...43	—	3...10	100...240V AC, 50/60 Hz	150-C25NBD
		—		24V AC/DC	150-C25NBR
	17.3...52	—	5...10	100...240V AC, 50/60 Hz	150-C30NBD
		—		24V AC/DC	150-C30NBR
	21...64	—	7.5...20	100...240V AC, 50/60 Hz	150-C37NBD
		—		24V AC/DC	150-C37NBR
	25...74	—	7.5...20	100...240V AC, 50/60 Hz	150-C43NBD
		—		24V AC/DC	150-C43NBR
	34.6...104	—	15...30	100...240V AC, 50/60 Hz	150-C60NBD
		—		24V AC/DC	150-C60NBR
	50...147	—	15...40	100...240V AC, 50/60 Hz	150-C85NBD
		—		24V AC/DC	150-C85NBR
	47...187	—	20...60	100...240V AC, 50/60 Hz	150-C108NBD
		—		24V AC/DCΔ	150-C108NBR
	59...234	—	20...75	100...240V AC, 50/60 Hz	150-C135NBD
		—		24V AC/DCΔ	150-C135NBR
	116...348	—	75...100	100...240V AC, 50/60 Hz	150-C201NBD
		—		24V AC/DCΔ	150-C201NBR
	145...435	—	100...150	100...240V AC, 50/60 Hz	150-C251NBD
		—		24V AC/DCΔ	150-C251NBR
	183...549	—	100...200	100...240V AC, 50/60 Hz	150-C317NBD
		—		24V AC/DCΔ	150-C317NBR
	208...625	—	125...200	100...240V AC, 50/60 Hz	150-C361NBD
		—		24V AC/DCΔ	150-C361NBR
	277...831	—	200...300	100...240V AC, 50/60 Hz	150-C480NBD
		—		24V AC/DCΔ	150-C480NBR

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

Δ Separate 120V or 240V single phase is required for fan operation.

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type
					Cat. No.
230	1.7...5.1	0.25...1.1	1	100...240V AC, 50/60 Hz	150-C3NBD
				24V AC/DC	150-C3NBR
	5.1...16	1.1...4	1...5	100...240V AC, 50/60 Hz	150-C9NBD
				24V AC/DC	150-C9NBR
	9.1...27.6	2.2...7.5	3...7.5	100...240V AC, 50/60 Hz	150-C16NBD
				24V AC/DC	150-C16NBR
	10.9...32.8	2.2...7.5	3...10	100...240V AC, 50/60 Hz	150-C19NBD
				24V AC/DC	150-C19NBR
	14.3...43	4...11	3...15	100...240V AC, 50/60 Hz	150-C25NBD
				24V AC/DC	150-C25NBR
230	17.3...52	4...15	5...15	100...240V AC, 50/60 Hz	150-C30NBD
				24V AC/DC	150-C30NBR
	21...64	5.5...18.5	7.5...20	100...240V AC, 50/60 Hz	150-C37NBD
				24V AC/DC	150-C37NBR
	25...74	5.5...22	7.5...25	100...240V AC, 50/60 Hz	150-C43NBD
				24V AC/DC	150-C43NBR
	34.6...104	7.5...30	15...40	100...240V AC, 50/60 Hz	150-C60NBD
				24V AC/DC	150-C60NBR
	50...147	15...45	20...50	100...240V AC, 50/60 Hz	150-C85NBD
				24V AC/DC	150-C85NBR
230	47...187	55	20...60	100...240V AC, 50/60 Hz	150-C108NBD
				24V AC/DC [△]	150-C108NBR
	59...234	75	25...75	100...240V AC, 50/60 Hz	150-C135NBD
				24V AC/DC [△]	150-C135NBR
	116...348	110	75...125	100...240V AC, 50/60 Hz	150-C201NBD
				24V AC/DC [△]	150-C201NBR
	145...435	132	100...150	100...240V AC, 50/60 Hz	150-C251NBD
				24V AC/DC [△]	150-C251NBR
	183...549	160	125...200	100...240V AC, 50/60 Hz	150-C317NBD
				24V AC/DC [△]	150-C317NBR
230	208...625	200	150...250	100...240V AC, 50/60 Hz	150-C361NBD
				24V AC/DC [△]	150-C361NBR
230	277...831	250	200...300	100...240V AC, 50/60 Hz	150-C480NBD
				24V AC/DC [△]	150-C480NBR

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

△ Separate 120V or 240V single phase is required for fan operation.



SMC™-3 Smart Motor Controllers

Product Selection

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type
					Cat. No.
380/400/415/460	1.7...5.1	0.55...2.2	0.5...2	100...240V AC, 50/60 Hz	150-C3NBD
				24V AC/DC	150-C3NBR
	5.1...16	2.2...7.5	2...7.5	100...240V AC, 50/60 Hz	150-C9NBD
				24V AC/DC	150-C9NBR
	9.1...27.6	4...11	5...15	100...240V AC, 50/60 Hz	150-C16NBD
				24V AC/DC	150-C16NBR
	10.9...32.8	4...15	5...15	100...240V AC, 50/60 Hz	150-C19NBD
				24V AC/DC	150-C19NBR
	14.3...43	5.5...22	7.5...20	100...240V AC, 50/60 Hz	150-C25NBD
				24V AC/DC	150-C25NBR
	17.3...52	7.5...22	7.5...30	100...240V AC, 50/60 Hz	150-C30NBD
				24V AC/DC	150-C30NBR
	21...64	7.5...30	10...40	100...240V AC, 50/60 Hz	150-C37NBD
				24V AC/DC	150-C37NBR
	25...74	11...37	10...50	100...240V AC, 50/60 Hz	150-C43NBD
				24V AC/DC	150-C43NBR
	34.6...104	15...55	20...75	100...240V AC, 50/60 Hz	150-C60NBD
				24V AC/DC	150-C60NBR
	50...147	22...75	25...100	100...240V AC, 50/60 Hz	150-C85NBD
				24V AC/DC	150-C85NBR
	47...187	90	40...150	100...240V AC, 50/60 Hz	150-C108NBD
				24V AC/DCΔ	150-C108NBR
	59...234	132	50...150	100...240V AC, 50/60 Hz	150-C135NBD
				24V AC/DCΔ	150-C135NBR
	116...348	160	150...250	100...240V AC, 50/60 Hz	150-C201NBD
				24V AC/DCΔ	150-C201NBR
	145...435	250	200...350	100...240V AC, 50/60 Hz	150-C251NBD
				24V AC/DCΔ	150-C251NBR
	183...549	315	250...450	100...240V AC, 50/60 Hz	150-C317NBD
				24V AC/DCΔ	150-C317NBR
	208...625	355	300...500	100...240V AC, 50/60 Hz	150-C361NBD
				24V AC/DCΔ	150-C361NBR
	277...831	450	350...700	100...240V AC, 50/60 Hz	150-C480NBD
				24V AC/DCΔ	150-C480NBR

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

Δ Separate 120V or 240V single phase is required for fan operation.

Open Type Controllers — For use with Delta-Connected Motors, Continued

Rated Voltage [V AC]	Motor Current [A]‡	Max. kW, 50 Hz	Max. Hp, 60 Hz	Control Power	Open Type
					Cat. No.
500/575	1.7...5.1	0.75...3	1...3	100...240V AC, 50/60 Hz 24V AC/DC	150-C3NCD 150-C3NCR
	5.1...16	3...7.5	3...10	100...240V AC, 50/60 Hz 24V AC/DC	150-C9NCD 150-C9NCR
	9.1...27.6	5.5...15		100...240V AC, 50/60 Hz 24V AC/DC	150-C16NCD 150-C16NCR
	10.9...32.8	5.5...22	7.5...30	100...240V AC, 50/60 Hz 24V AC/DC	150-C19NCD 150-C19NCR
	14.3...43	7.5...22		100...240V AC, 50/60 Hz 24V AC/DC	150-C25NCD 150-C25NCR
	17.3...52	11...30	10...40	100...240V AC, 50/60 Hz 24V AC/DC	150-C30NCD 150-C30NCR
	21...64	11...37		100...240V AC, 50/60 Hz 24V AC/DC	150-C37NCD 150-C37NCR
	25...74	15...45	15...60	100...240V AC, 50/60 Hz 24V AC/DC	150-C43NCD 150-C43NCR
	34.6...104	22...55		100...240V AC, 50/60 Hz 24V AC/DC	150-C60NCD 150-C60NCR
	50...147	30...90	30...100	100...240V AC, 50/60 Hz 24V AC/DC	150-C85NCD 150-C85NCR
500/575	47...187	132		100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C108NCD 150-C108NCR
	59...234	160	40...150	100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C135NCD 150-C135NCR
	116...348	250		100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C201NCD 150-C201NCR
	145...435	315	250...300	100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C251NCD 150-C251NCR
	183...549	400		100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C317NCD 150-C317NCR
	208...625	450	300...500	100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C361NCD 150-C361NCR
	277...831	560		100...240V AC, 50/60 Hz 24V AC/DC Δ	150-C480NCD 150-C480NCR

‡ Motor FLA rating should fall within specified current range for unit to operate properly.

Δ Separate 120V or 240V single phase is required for fan operation.



SMC™-3 Smart Motor Controllers

Product Selection

Combination Enclosed (IP65, NEMA 4/12) Controllers with Fusible Disconnect or Circuit Breaker

Rated Voltage [V AC]	Current Rating [A]	kW	Hp	IP65 (Type 4/12) Enclosed Combination Controllers with Fusible Disconnect [‡] Cat. No.	IP65 (Type 4/12) Enclosed Combination Controllers with Circuit Breaker [‡] Cat. No.
200/208	3	—	0.5	152H-C3FHD-33	153H-C3FHD-33
	9	—	0.75	152H-C9FHD-34	153H-C9FHD-34
	9	—	1	152H-C9FHD-35	153H-C9FHD-35
	9	—	1.5	152H-C9FHD-36	153H-C9FHD-36
	16	—	2	152H-C16FHD-37	153H-C16FHD-37
	16	—	3	152H-C16FHD-38	153H-C16FHD-38
	25	—	5	152H-C25FHD-39	153H-C25FHD-39
	37	—	7.5	152H-C37FHD-40	153H-C37FHD-40
	43	—	10	152H-C43FHD-41	153H-C43FHD-41
	60	—	15	152H-C60FHD-42	153H-C60FHD-42
	85	—	20	152H-C85FHD-43	153H-C85FHD-43
	85	—	25	152H-C85FHD-44	153H-C85FHD-44
	108	—	30	152H-C108FHD-45	153H-C108FHD-45
	135	—	40	152H-C135FHD-46	153H-C135FHD-46
	201	—	60	152H-C201FHD-48	153H-C201FHD-48
	251	—	75	152H-C251FHD-49	153H-C251FHD-49
	317	—	100	152H-C317FHD-50	153H-C317FHD-50
	361	—	125	152H-C361FHD-51	153H-C361FHD-51
	480	—	150	152H-C480FHD-52	153H-C480FHD-52
230	3	0.37	0.5	152H-C3FAD-33	153H-C3FAD-33
	9	0.55	0.75	152H-C9FAD-34	153H-C9FAD-34
	9	0.75	1	152H-C9FAD-35	153H-C9FAD-35
	9	1.1	1.5	152H-C9FAD-36	153H-C9FAD-36
	9	1.5	2	152H-C9FAD-37	153H-C9FAD-37
	16	2.2	3	152H-C16FAD-38	153H-C16FAD-38
	25	3.7	5	152H-C25FAD-39	153H-C25FAD-39
	30	5.5	7.5	152H-C30FAD-40	153H-C30FAD-40
	37	7.5	10	152H-C37FAD-41	153H-C37FAD-41
	43	11	15	152H-C43FAD-42	153H-C43FAD-42
	60	15	20	152H-C60FAD-43	153H-C60FAD-43
	85	18.5	25	152H-C85FAD-44	153H-C85FAD-44
	85	22	30	152H-C85FAD-45	153H-C85FAD-45
	108	30	40	152H-C108FAD-46	153H-C108FAD-46
	135	37	50	152H-C135FAD-47	153H-C135FAD-47
	201	55	75	152H-C201FAD-49	153H-C201FAD-49
	251	75	100	152H-C251FAD-50	153H-C251FAD-50
	317	90	125	152H-C317FAD-51	153H-C317FAD-51
	361	110	150	152H-C361FAD-52	153H-C361FAD-52
	480	147	200	‡ 152H-C480JAD-54	153H-C480FAD-54

[‡] These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

* Available in IP54 (Type 12) enclosure only.

Combination Enclosed (IP65, NEMA 4/12) Controllers with Fusible Disconnect or Circuit Breaker, Continued

Rated Voltage [V AC]	Current Rating [A]	kW	Hp	IP65 (Type 4/12) Enclosed Combination Controllers with Fusible Disconnect [‡] Cat. No.	IP65 (Type 4/12) Enclosed Combination Controllers with Circuit Breaker [‡] Cat. No.
460	3	0.37	0.5	152H-C3FBD-33	153H-C3FBD-33
	3	0.55	0.75	152H-C3FBD-34	153H-C3FBD-34
	3	0.75	1	152H-C3FBD-35	153H-C3FBD-35
	9	1.1	1.5	152H-C9FBD-36	153H-C9FBD-36
	9	1.5	2	152H-C9FBD-37	153H-C9FBD-37
	9	2.2	3	152H-C9FBD-38	153H-C9FBD-38
	16	3.7	5	152H-C16FBD-39	153H-C16FBD-39
	16	5.5	7.5	152H-C16FBD-40	153H-C16FBD-40
	25	7.5	10	152H-C25FBD-41	153H-C25FBD-41
	30	11	15	152H-C30FBD-42	153H-C30FBD-42
	37	15	20	152H-C37FBD-43	153H-C37FBD-43
	43	18.5	25	152H-C43FBD-44	153H-C43FBD-44
	43	22	30	152H-C43FBD-45	153H-C43FBD-45
	60	30	40	152H-C60FBD-46	153H-C60FBD-46
	85	37	50	152H-C85FBD-47	153H-C85FBD-47
	85	45	60	152H-C85FBD-48	153H-C85FBD-48
	108	55	75	152H-C108FBD-49	153H-C108FBD-49
	135	75	100	152H-C135FBD-50	153H-C135FBD-50
	201	110	150	152H-C201FBD-52	153H-C201FBD-52
	251	132	200	152H-C251FBD-54	153H-C251FBD-54
	317	160	250	152H-C317FBD-56	153H-C317FBD-56
	361	200	300	152H-C361FBD-57	153H-C361FBD-57
	480	250	400	[‡] 152H-C480JBD-59	153H-C480FBD-59
500/575	3	0.55	0.75	152H-C3FCD-34	153H-C3FCD-34
	3	0.75	1	152H-C3FCD-35	153H-C3FCD-35
	9	1.1	1.5	152H-C9FCD-36	153H-C9FCD-36
	9	1.5	2	152H-C9FCD-37	153H-C9FCD-37
	9	2.2	3	152H-C9FCD-38	153H-C9FCD-38
	9	3.7	5	152H-C9FCD-39	153H-C9FCD-39
	16	5.5	7.5	152H-C16FCD-40	153H-C16FCD-40
	16	7.5	10	152H-C16FCD-41	153H-C16FCD-41
	25	11	15	152H-C25FCD-42	153H-C25FCD-42
	30	15	20	152H-C30FCD-43	153H-C30FCD-43
	37	18.5	25	152H-C37FCD-44	153H-C37FCD-44
	43	22	30	152H-C43FCD-45	153H-C43FCD-45
	43	30	40	152H-C43FCD-46	153H-C43FCD-46
	60	37	50	152H-C60FCD-47	153H-C60FCD-47
	85	45	60	152H-C85FCD-48	153H-C85FCD-48
	85	55	75	152H-C85FCD-49	153H-C85FCD-49
	108	75	100	152H-C108FCD-50	153H-C108FCD-50
	135	90	125	152H-C135FCD-51	153H-C135FCD-51
	201	132	200	152H-C201FCD-54	153H-C201FCD-54
	251	160	250	152H-C251FCD-56	153H-C251FCD-56
	317	200	300	152H-C317FCD-57	153H-C317FCD-57
	361	250	350	152H-C361FCD-58	153H-C361FCD-58
	480	315	500	[‡] 152H-C480JCD-61	153H-C480FCD-61

[‡] These controllers require a separate 100...240V, 50/60 Hz single-phase control source. To add a control circuit transformer to the enclosure, add the appropriate option code to the catalog string.

^{*} Available in IP54 (Type 12) enclosure only.



SMC™-3 Smart Motor Controllers



Modifications/Accessories

Enclosed Options

Option	Description		Cat. No. Modification
Push Buttons	Start-Stop Push Button		-1
Selector Switch	Hand-Off-Auto Selector Switch		-3
Pilot Light	Transformer Pilot Light - Red Run Indicator		-4R
Control Circuit Transformer	Control Circuit Transformer (fused primary and secondary)		-6P
	480V Line Side Protective Module	3...480 A	-8L
	600V Line Side Protective Module	3...480 A	
Protective Module	480V Load Side Protective Module	43...480 A	-8M
	600V Load Side Protective Module	43...480 A	
	480V Both Line and Load Side Protective Module	43...480 A	-8B
	600V Both Line and Load Side Protective Module	43...480 A	
	1 N.O. auxiliary contact	for 3...480 A units	-90
Auxiliary Contacts	2 N.O. auxiliary contacts	for 3...480 A units	-900
	1 N.O. and 1 N.C. auxiliary contacts	for 3...480 A units	-901
Disconnect Auxiliary	N.O. disconnect auxiliary mounted on the operating mechanism		-98
	N.C. disconnect auxiliary mounted on the operating mechanism		-99
	5...43 A§		
	60...85 A§		
NEMA Bypass Contactor and Overload Relay	108...135 A§		
	201...251 A		
	317...361 A		
	480 A		
	5...43 A§		
	60...85 A§		
MCS Bypass Contactor and Overload Relay	108...135 A§		
	201...251 A		
	317...361 A		
	480 A		

§ Available only as a modified standard.

Accessories**Auxiliary Contact Blocks**

Description		N.O.	N.C.	Connection Diagram				Cat. No.
	Auxiliary Contact Blocks for side mounting with sequence terminal designations 1- and 2-pole Quick and easy mounting without tools One block per device only	1	0					150-CA10
		2	0					150-CA20
		0	1					150-CA01
		1	1					150-CA11 (Form C)

Fans

Description		For Use With		Pkg. Qty.	Cat. No.
	Fan Field installed	Optional	150-C3...37	1	150-CF64
			150-C43...85		150-CF147
		Replacement	150-C108, 150-C135		41391-801-03
			150-C201, 150-C251		41391-801-01
			150-C317...C480		41391-801-02

Connecting Modules

Description		For Use With		Pkg. Qty.	Cat. No.
	Connecting modules to 140-M Electrical interconnection between SMC-3 and 140-M. Motor protector and SMC must be mounted separately.	Connects 140-M-C to 150-C3...25		1	150-CC25
		Connects 140-M-D to 150-C3...25		1	150-CD25
		Connects 140-M-F to 150-C3...37		1	150-CF45
	Connecting modules to 100-C Electrical interconnection between SMC-3 and 100-C. Contactor and SMC must be mounted separately.	Connects 100-C09...23 to 150-C3...19		1	150-CI23
		Connects 100-C30...37 to 150-C3...37		1	150-CI37



Protective Modules


Protective modules must not be placed on the load side of a device when using an inside-the-delta connection.

Description		For Use With	Pkg. Qty.	Cat. No.
	480V Protective Module	150-C3...37NB	1	150-C84
		150-C43...85NB (line and/or load)	1	150-C84P
		150-C108...480NB (line and/or load)	1	150-F84L
	600V Protective Module	150-C3...37NC	1	150-C86
		150-C43...85NC (line and/or load)	1	150-C86P
		150-C108...480NC (line and/or load)	1	150-F86L

IEC Terminal Covers

Description		For Use With	Pkg. Qty.	Cat. No.
	Terminal Cover IEC line or load terminal covers for 108...480 A devices. Dead front protection	150-C108...-C135	1	150-TC1
		150-C201...-C251	1	150-TC2
		150-C317...-C480	1	150-TC3

Terminal Lug Kits (108...480 A)

	Current Rating [A] ‡	Wire Size	Total No. of Line Controller Terminal Lugs Possible Each Side		Pkg. Qty.	Cat. No.
			Line Side	Load Side		
108...135Δ	#6...250 MCM AWG 16 mm ² ...120 mm ²	3	3	6	3	199-LF1
		6	6			
317...480Δ	#4...500 MCM AWG 25 mm ² ...240 mm ²	6	6			199-LG1

Line and Load terminals are provided as standard on enclosed SMCs.

‡ 1...85 A units have box lugs standard. No additional lugs are required.

Δ When a multi-conductor lug is required, refer to the Instruction Sheet for appropriate lug catalog number.

Marking Tags and Covers

Description		For Use With	Pkg. Qty.	Cat. No.
	Marking Tag Sheet 160 perforated paper labels each, 6 x 17 mm, to be used with a transparent cover	150-C, 150-D	10	100-FMP
	Transparent Cover To be used with marking tag sheets	150-C, 150-D	100	100-FMC

Remote Reset Solenoid

Description		For Use With	Pkg. Qty.	Cat. No.
	Remote Reset Solenoid for remote reset of electronic overload	193-T all, 150-C	1	193-ER1⊗

⊗ Voltage Suffix Code

Available Coil Voltages 12...600V 50 Hz/12...600V 60 Hz
Standard Coil Voltages

Voltage	24	48	110	115	120	220	240
50 Hz	J	—	D	—	—	A	—
60 Hz	J	—	—	—	D	—	A
DC	Z24	Z48	—	Z01	—	—	—

Surcharge for special voltages up to 20 pcs. (no surcharge for quantities greater than 20 pcs.)



Allen-Bradley


www.ab.com/catalogs
Publication 150-SG009F-EN-P

SMC™-3 Smart Motor Controllers


Typical Wiring Diagrams

Two-Wire Configuration


IEC

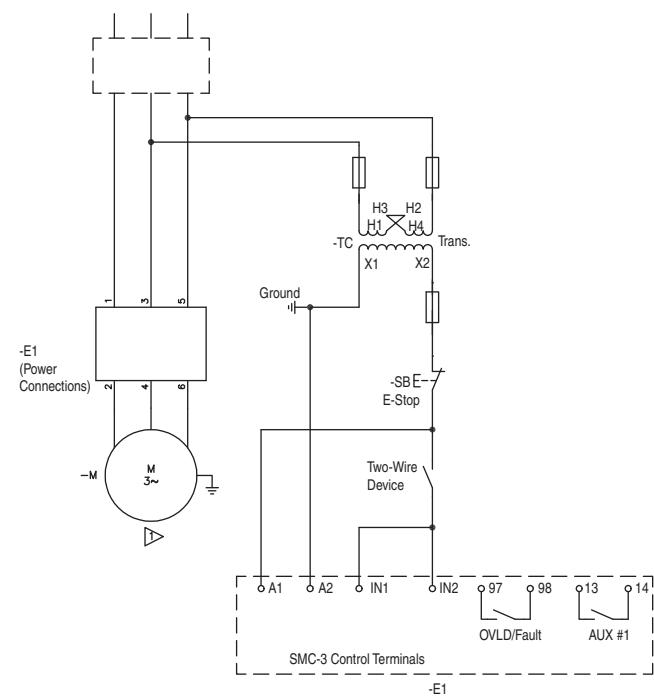


NEMA

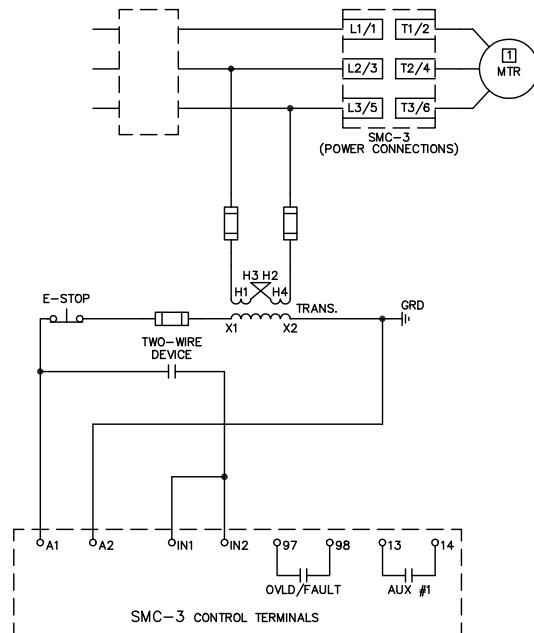**Three-Wire Configuration**

IEC

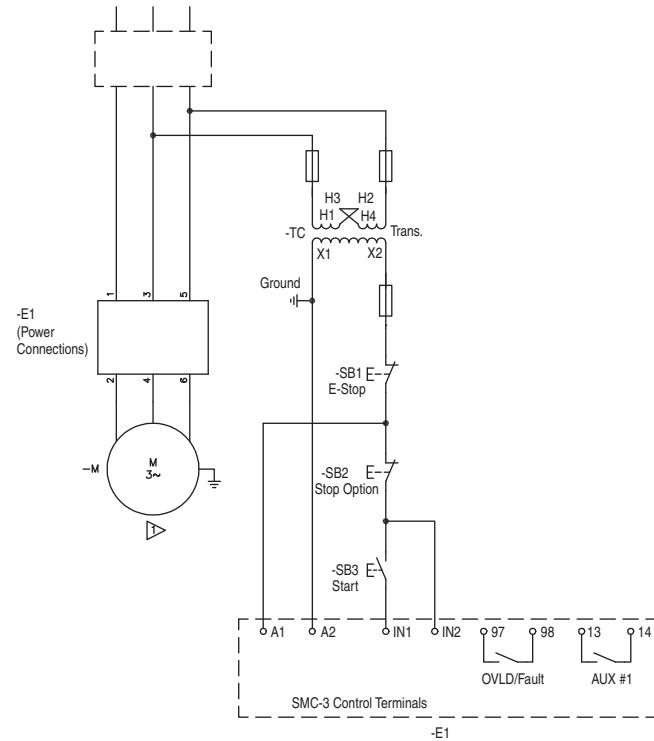


NEMA

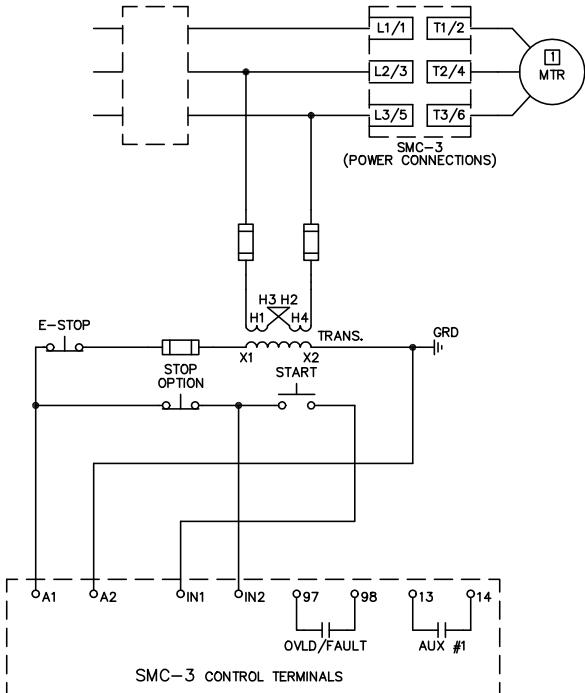


Isolation Contactor Configuration

IEC

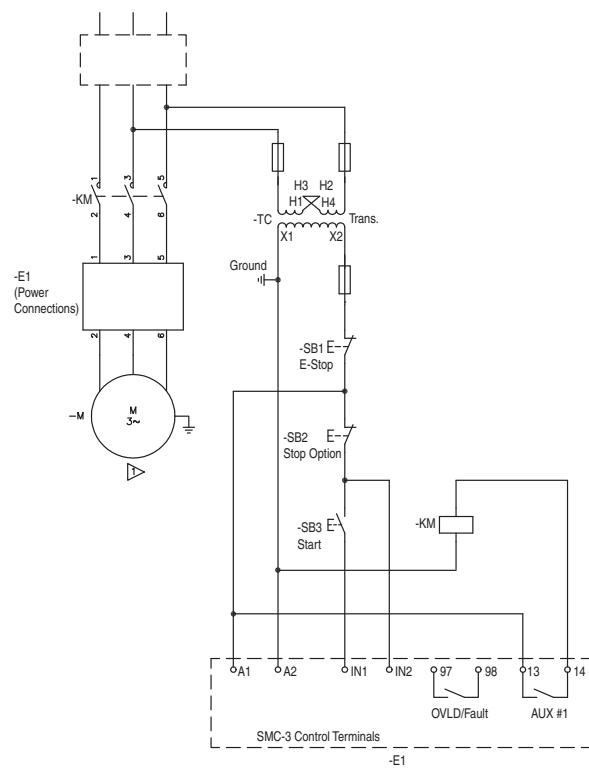


NEMA

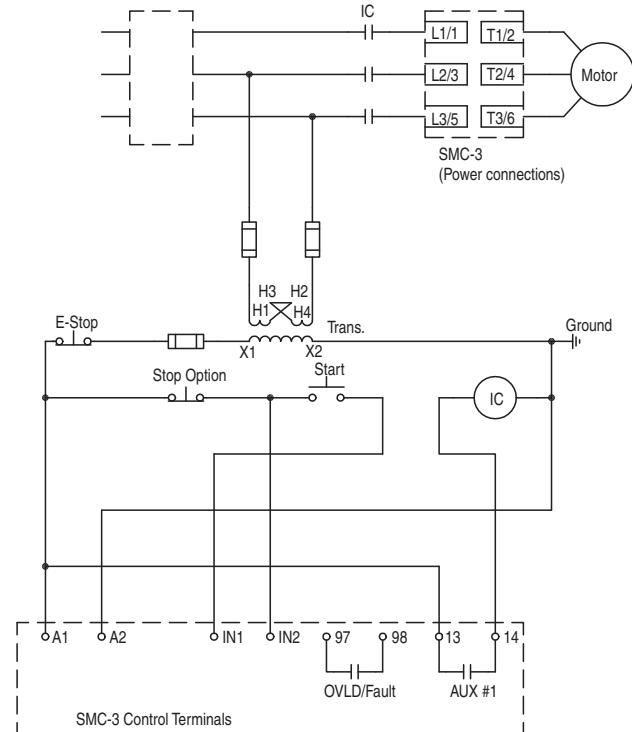
**Reversing Configuration**

Note: Minimum Off time equals 1.0 s.

IEC

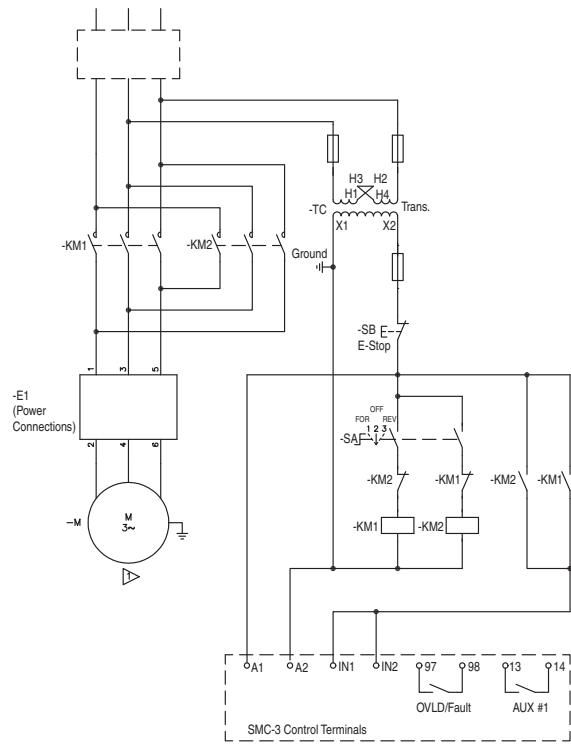

NEMA

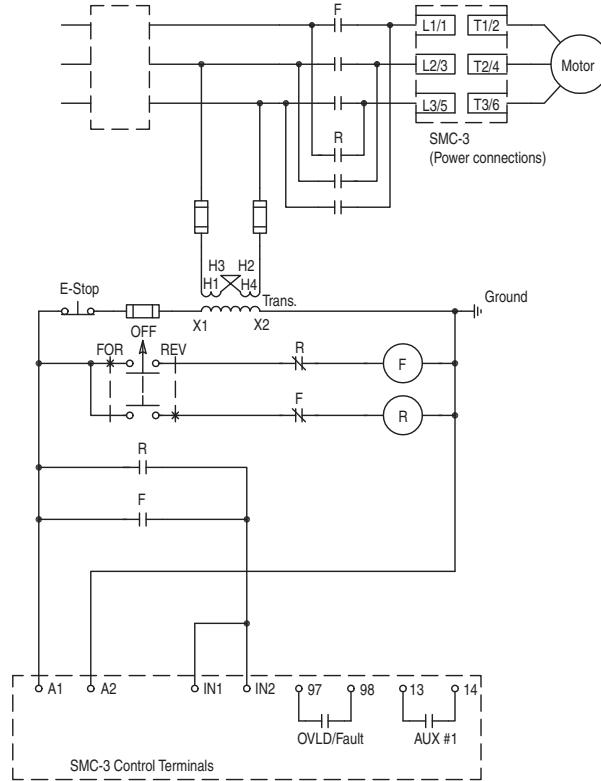

Standard Features											
Selectable Start Times	2, 5, 10, 15, 20, 25, or 30 s										
Selectable Initial Torque	0%, 25%, 35%, and 65% of locked rotor torque										
Selectable Current Limit	150%, 250%, 350%, and 450% of full load current										
Selectable Kick Start — 450% FLA	0, 0.5, 1.0, or 1.5 s										
Selectable Soft Stop	Off, 100%, 200%, or 300% of the start time setting when wired										
Electrical Ratings											
		UL/CSA/NEMA		IEC							
Power Circuit	Rated Operation Voltage	200...480V AC 200...600V AC		200...480V~ — 400V~ 500V~ — 500V~							
	Rated Insulation Voltage	600V AC		500V~							
	Dielectric Withstand	2200V AC		2500V~							
	Repetitive Peak	200...480V AC: 1400V 200...600V AC: 1600V		200...480V~: 1400V 500V~: 1600V							
	Operating Frequency	50/60 Hz		50/60 Hz							
	Utilization Category	1...37 A	—		AC-53b: 3.5-15:3585						
		43...60 A	—		AC-53b: 4.5-30:1770						
		85 A	—		AC-53b: 4.5-30:3570						
		108 A	—		AC-53b: 4.5-30:1770						
		135 A	—		AC-53b: 3.5-30: 1770						
		201...251 A	—		AC-53b: 3.5-30: 1770						
		317...480 A	—		AC-53b: 3.5-30: 1770						
Number of Poles		Equipment designed for 3-phase only									
Rated Impulse Voltage		6 kV									
DV/DT Protection		1000V/μs									
Overvoltage Category		III									
Short Circuit Protection	Type 1 										
	SCPD Performance		Non-Time Delay		Thermal Magnetic Circuit Breaker						
	SCPD List 		Max. Standard Available Fault		High Capacity Time Delay Class CC/J/L						
	Line Device Operational Current Rating [A]	3	5 kA		12						
		9	5 kA		5 kA						
		16	5 kA		60						
		19	5 kA		5 kA						
		25	5 kA		100						
		30	10 kA		10 kA						
		37	10 kA		125						
		43	10 kA		150						
		60	10 kA		225						
		85	10 kA		300						
		108	10 kA		400						
		135	10 kA		500						
		201	18 kA		600						
		251	18 kA		700						
		317	30 kA		800						
		361	30 kA		1000						
		480	42 kA		1200						
Delta Device Operational Current Rating [A]	5.1 16 27.6 32.8 43 52 64 74 104 147 187 234 348 435 549 625 831 831	5.1	5 kA		15						
		16	5 kA		60						
		27.6	5 kA		5 kA						
		32.8	5 kA		125						
		43	5 kA		150						
		52	10 kA		200						
		64	10 kA		250						
		74	10 kA		250						
		104	10 kA		300						
		147	10 kA		400						
		187	10 kA		500						
		234	10 kA		700						
		348	18 kA		1000						
		435	18 kA		1200						
		549	30 kA		1600						
		625	30 kA		1600						
		831	42 kA		1600						
		831	42 kA		1600						

[†] Non-time delay fuses (K5).[§] Consult local codes for proper sizing of short-circuit protection.[▲] Type 1 performance/protection indicates that, under a short-circuit condition, the fused or circuit breaker-protected starter shall cause no danger to persons or installation but may not be suitable for further service without repair or replacement.[△] For short-circuit current rating (SCCR) for enclosed panel with external bypass or isolation contactor, see the Industrial Controls catalog website: www.ab.com/catalogs.

Electrical Ratings		
	UL/CSA/NEMA	IEC
Control Circuit	Rated Operational Voltage (+10%, -15%)	100...240V AC, 24V AC/DC
	Rated Insulation Voltage	250V
	Rated Impulse Voltage	2.5 kV
	Dielectric Withstand	1500V AC
	Overvoltage Category	II
	Operating Frequency	50/60 Hz
	Input onstate voltage minimum, during start (IN1, IN2)	85V AC, 19.2V DC / 19.2V AC
	Input onstate current (IN1, IN2)	9.8 mA @ 120V AC / 19.6 mA @ 240V AC, 7.3 mA @ 24V AC/DC
	Input offstate voltage maximum (IN1, IN2)	40V AC, 17V DC / 12V AC
	Input offstate current @ input offstate voltage (IN1, IN2)	<10 mA, <12 mA
	Control Power with Fan, during start	3...37 A
		215 mA @ 120V AC / 180 mA @ 240V AC, 800 mA @ 24V DC / 660 mA @ 24V AC
		43...85 A
		200 mA @ 120V AC / 100 mA @ 240V AC, 700 mA @ 24V AC/DC
	Control Power without Fan, during start	108...135 A
		20VA
		201...251 A
		40VA
		317...480 A
		60VA
	Controller Rating [A]	Fan Power
	3...37 A	Control Power
Steady State Heat Dissipation and Overload Current Range	205 mA @ 120V AC / 145 mA @ 240V AC, 705 mA @ 24V DC / 580 mA @ 24V AC	200 mA @ 120V AC / 120 mA @ 240V AC, 600 mA @ 24V AC/DC
	Controller Rating [A]	Steady State Heat Dissipation [W]
	3	11
	9	12
	16	14
	19	15
	25	17
	30	19
	37	24
	43	34
	60	50
	85	82
	108	62
	135	75
	201	129
	251	147
	317	174
	361	194
	480	239
		Overload Current Range [A]

Auxiliary Contacts		
	UL/CSA/NEMA	IEC
Rated Operational Voltage	250V AC/30V DC	250V~/30V DC
Rated Insulation Voltage	250V	250V~
Rated Impulse Voltage	2.5 kV	4 kV
Dielectric Withstand	1500V AC	2000V~
Overvoltage Category	II	III★
Operating Frequency	50/60 Hz	50/60 Hz
Utilization Category	D300/D300	AC-15/DC
TB-97, -98 (OVLD/Fault)	Type of Control Circuit	Electromagnetic relay
	Number of Contacts	1
	Type of Contacts	Normally Open (N.O.)
	Type of Current	AC/DC
	Rated Operational Current (max.)	0.6 A @ 120V~ and 0.3 A @ 240V~
	Conventional Thermal Current I_{th}	1 A
	Make/Break VA	432/72
TB-13, -14 Aux 1 (Normal/Up-to-Speed)	Type of Control Circuit	Electromagnetic relay
	Number of Contacts	1
	Type of Contacts	Normally Open (N.O.)
	Type of Current	AC/DC
	Rated Operational Current (max.)	0.6 A @ 120V~ and 0.3 A @ 240V~
	Conventional Thermal Current I_{th}	1 A
	Make/Break VA	432/72

* Overvoltage category II, when either control or auxiliary circuit is wired to a SELV or PELV circuit.



SMC™-3 Smart Motor Controllers

Specifications

Electrical Ratings			
Side-Mount Auxiliary Contacts		UL/CSA/NEMA	IEC
Rated Operational Voltage		250V AC/30V DC	250V AC/30V DC
Rated Insulation Voltage		250V	250V AC
Rated Impulse Voltage		2.5 kV	4 kV
Dielectric Withstand		1500V AC	2000V AC
Overvoltage Category		II	III★
Operating Frequency		50/60 Hz	50/60 Hz
TB-23, -24 (Normal/Up-to-Speed)	Utilization Category	C300/R150	AC-15/DC-13
	Type of Control Circuit	Electromagnetic relay	
	Number of Contacts	1	
	Type of Contacts	Normally Open (N.O.)	
	Type of Current	AC/DC	
	Rated Operational Current (max.)	1.5 A @ 120V AC, 0.75A @ 240V AC, 1.17 A @ 24V DC	
	Conventional Thermal Current I_{th}	2.5 A	
	Make/Break VA	1800/180V AC, 28V DC (resistive)	
		B300/R300	AC-15/DC-13
TB-11, -12 (Normal/Up-to-Speed)	Type of Control Circuit	Electromagnetic relay	
	Type of Control Circuit	1	
	Number of Contacts	1	
	Type of Contacts	Normally Closed (N.C.)	
	Type of Current	AC/DC	
	Rated Operational Current (max.)	3 A @ 120V AC, 1.5A @ 240V AC, 1.17 A @ 24V DC	
	Conventional Thermal Current I_{th}	5 A	
	Make/Break VA	3600/360VA, 28VA (DC resistive)	

★ Overvoltage category II, when either control or auxiliary circuit is wired to a SELV or PELV circuit.

Environmental			
Operating Temperature Range	-5...+50 °C (23...122 °F) (open)	-5...+40 °C (23...104 °F) (enclosed)	
Storage and Transportation Temperature Range	-25...+85 °C (-13...+185 °F)		
Altitude	2000 m (6560 ft)		
Humidity	5...95% (non-condensing)		
Pollution Degree	2		
Type of Protection	IP2X		


Mechanical Ratings			
Resistance to Vibration	Operational	1.0 G Peak, 0.15 mm (0.006 in.) displacement	
	Non-Operational	2.5 G Peak, 0.38 mm (0.015 in.) displacement	
Resistance to Shock	Operational	15 G	
	Non-Operational	30 G	
Line Power Terminals	Cable Size Tightening Torque	3...37 A	2.5...25 mm ² (14...4 AWG) 2.3...2.8 N•m (20...25 in•lbs)
		43...85 A	2.5...95 mm ² (14...3/0 AWG) 11.3...12.4 N•m (100...110 in•lbs)
		108...135 A	23 N•m (200 in•lbs)
		201...251 A	Two M10 x 1.5 diameter holes per power pole
		317...480 A	Two M12 x 1.75 diameter holes per power pole
Load Power Terminals	Cable Size Tightening Torque	3...37 A	2.5...16 mm ² (14...6 AWG) 2.3...2.5 N•m (20...22.5 in•lbs)
		43...85 A	2.5...50 mm ² (14...1 AWG) 11.3...12.4 N•m (100...110 in•lbs)
		108...135 A	23 N•m (200 in•lbs)
		201...251 A	Two M10 x 1.5 diameter holes per power pole
		317...480 A	Two M12 x 1.75 diameter holes per power pole
Control Terminals	Cable Size Tightening Torque	All	0.2...2.5 mm ² (24...14 AWG) 0.5...0.9 N•m (4.4...8.0 in•lbs)

Other			
EMC Emission Levels	Conducted Radio Frequency Emissions	—	Class A
	Radiated Emissions	—	Class A
EMC Immunity Levels	Electrostatic Discharge	4 kV Contact and 8 kV Air Discharge	8 kV Air Discharge
	Radio Frequency Electromagnetic Field	—	Per EN/IEC 60947-4-2
	Fast Transient	—	Per EN/IEC 60947-4-2
	Surge Transient	—	Per EN/IEC 60947-4-2




SMC-3 Overload Trip Curves


Trip Class 10

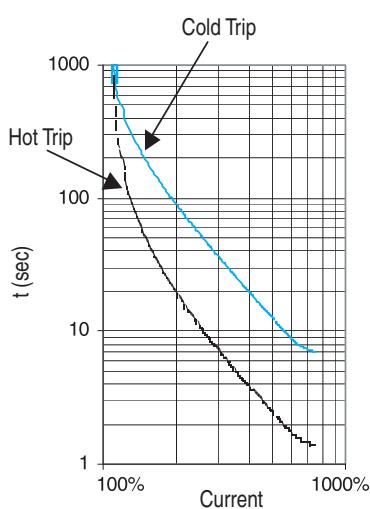



Trip Class 15

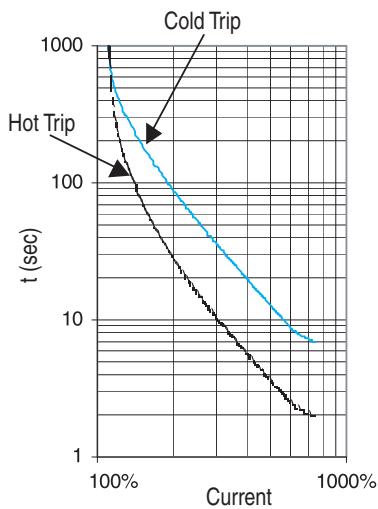



Trip Class 20

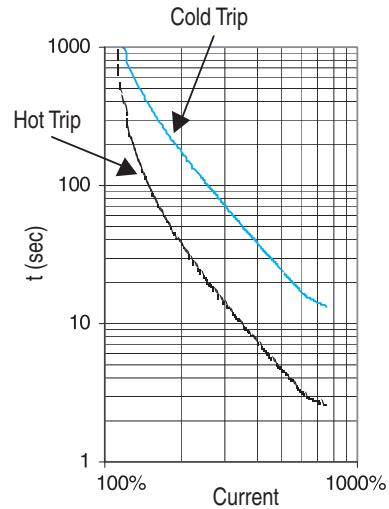


Starts per Hour Curves

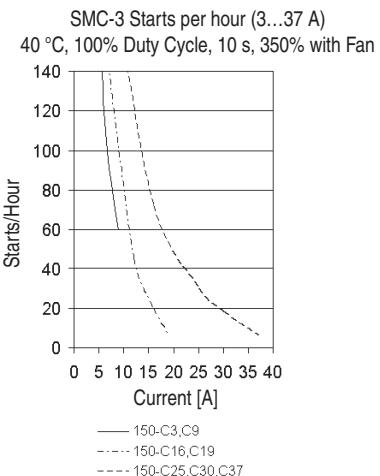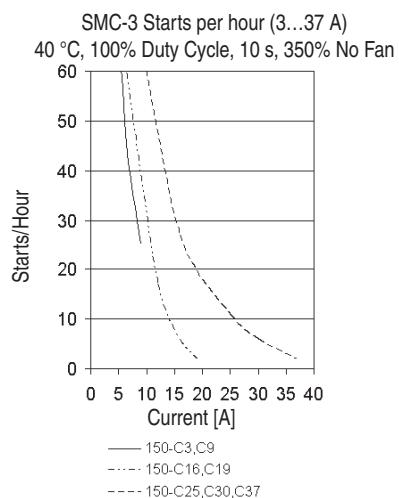

SMC-3 Starts per hour (43...85 A)
 40°C, 100% Duty Cycle, 20 sec, 350% (with standard fan)

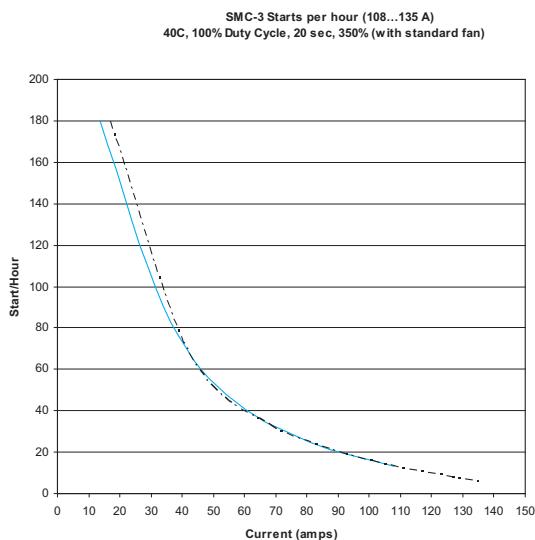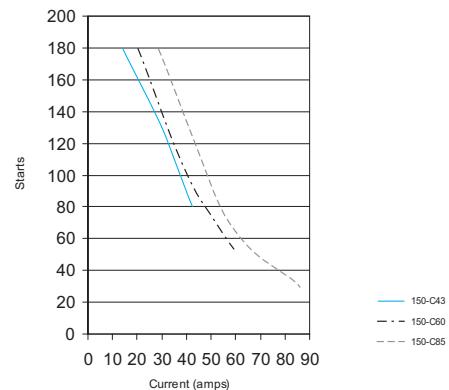


SMC-3 Starts per hour (201...480 A)
 40°C, 100% Duty Cycle, 20 sec, 350% (with standard fan)

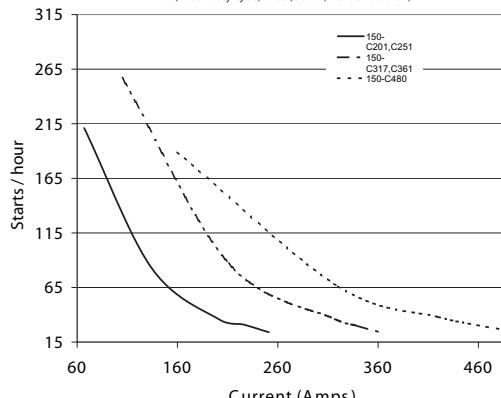


Dimensions in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes. All dimensions are subject to change.

Open Type

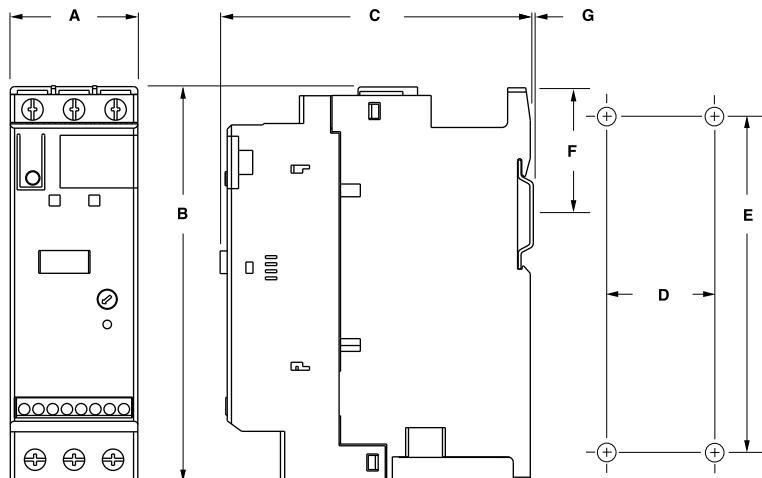

Controller Rating [A]	A	B	C	D	E	F	G	Mounting Hole Size	Weight kg (lbs)
1...37	44.8 (1-49/64)	139.7 (5-1/2)	100 (4-21/64)	35 (1-3/8)	132 (5-13/64)	46.4 (1.81)	2 (1/16)	4.6 (0.18)	0.86 (1.9)
43...85	72 (2.83)	206 (8.11)	130 (5.12)	55 (2.17)	198 (7.8)	102 (4.02)	2 (1/16)	5.3 (0.21)	2.25 (5.0)
108...135	196.4 (7.74)	443.7 (17.47)	205.2 (8.08)	166.6 (6.56)	367 (14.45)	—	—	7.5 (0.295)	15 (33)
201...251	225 (8.86)	560 (22.05)	265.3 (10.45)	150 (5.91)	504.1 (19.85)	—	—	11.5 (0.45)	30.4 (67)
317...480	290 (11.42)	600 (23.62)	298 (11.73)	200 (7.87)	539.2 (21.23)	—	—	11.5 (0.45)	45.8 (101)

Minimum Enclosure Size

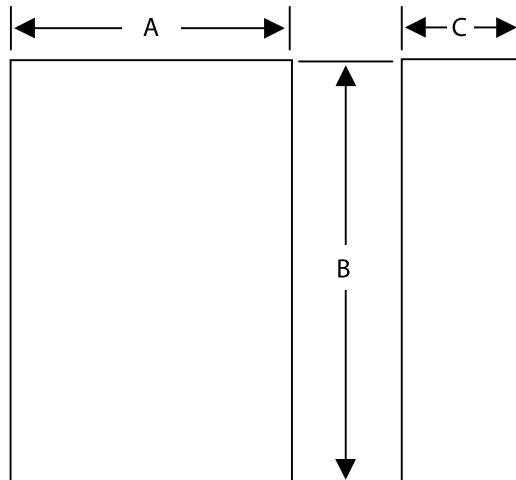

Controller Rating [A]	B Height	A Width	C Depth	Fan Requirements
1...37 A	305 (12)	224 (9)	152 (6)	none
43...85 A	406 (16)	305 (12)	203 (8)	none
108...135 A	762 (30)	610 (24)	305 (12)	none
201...251 A	965 (38)	762 (30)	356 (14)	none
317...480 A	1295 (51)	914 (36)	356 (14)	none

Enclosed Type Line-Connected Controllers

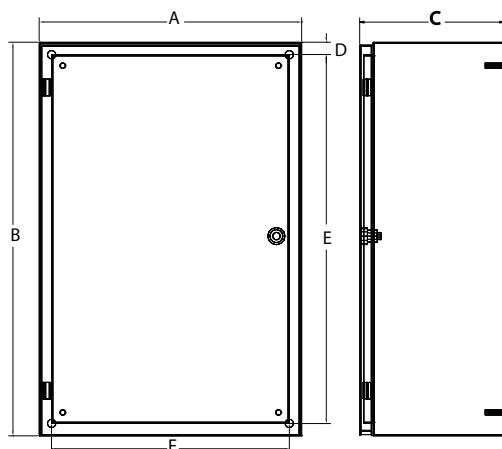


Figure 1 — Wall-Mount

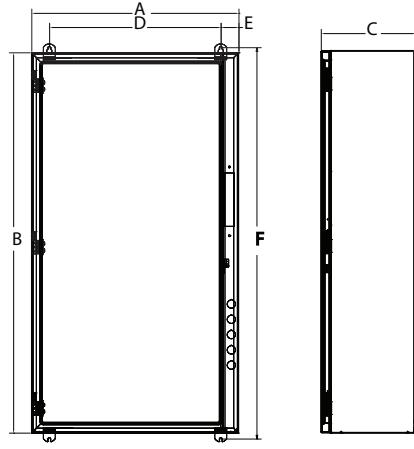


Figure 2 — Wall-Mount

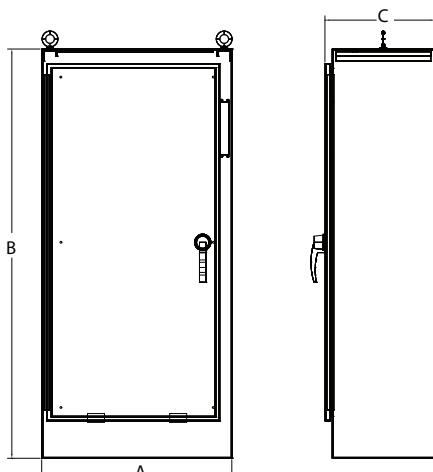


Figure 3 — Floor-Mount

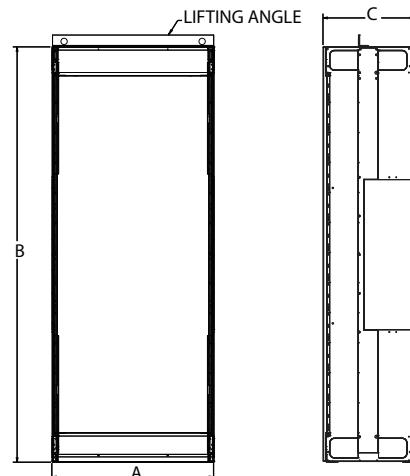


Figure 4 — Floor-Mount

Controller Rating [A]	Bulletin	With Option	Dimension Figure No.	Dimensions in inches (mm)					
				A (Width)	B (Height)	C (Depth)	D (Mtg. Dim.)	E (Mtg. Dim.)	F (Mtg. Dim.)
SMC-3 Non-Combination Controller									
3...37	150	—	1	8 (203)	12 (305)	6 (152)	2.44 (62)	10.43 (265)	3.0 (76)
		6P		12 (305)	12 (305)	6 (152)	2.41 (61)	10.43 (265)	7.0 (178)
43...85	150	—	1	8 (203)	14 (356)	8 (203)	2.44 (62)	12.40 (315)	3.0 (76)
		6P		16 (406)	14 (356)	8 (203)	4.38 (111)	12.40 (315)	7.0 (178)
108...135	150	Any	1	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
201...251	150	—	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	150, 150B	BP,NB,NI,6P		36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
317...361	150	Any	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
	150B	—		36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
		NI, 6P		36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
		BP,NI, 6P		36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
480	150	—	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
	150, 150B	BP,NB,NI,6P		36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)



SMC™-3 Smart Motor Controllers

Approximate Dimensions

Controller Rating [A]	Bulletin	With Option	Dimension Figure No.	Dimensions in inches (mm)					
				A (Width)	B (Height)	C (Depth)	D (Mtg. Dim.)	E (Mtg. Dim.)	F (Mtg. Dim.)
SMC-3 Combination Controller									
3...37	152H,153H	Any	1	16 (406)	14 (356)	8 (203)	4.38 (111)	12.40 (315)	7.0 (178)
43	152H	Any	1	16 (406)	14 (356)	8 (203)	4.38 (111)	12.40 (315)	7.0 (178)
	153H	Any	1	16 (406)	24 (610)	10 (254)	0.75 (19)	22.5 (572)	14.5 (368)
60	152H, 153H	Any	1	16 (406)	24 (610)	9 (229)	0.75 (19)	22.5 (572)	14.5 (368)
	152H	Any	1	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
85	152H	Any	1★	16 (406)	24 (610)	9 (229)	0.75 (19)	22.5 (572)	14.5 (368)
		Any	1‡	24 (610)	30 (762)	12 (305)	0.75 (19)	28.5 (724)	22.5 (572)
	153H	Any	1	16 (406)	24 (610)	9 (229)	0.75 (19)	22.5 (572)	14.5 (368)
108	152H,153H	Any	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
135	152H,153H	Any	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
201	152H,153H	—	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	152H,152B,153H,153B	Any	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
251	152H,153H	—	1	30 (762)	38 (965)	14 (356)	0.75 (19)	36.5 (927)	28.5 (724)
	152H,152B,153H,153B	Any	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
317	153H	—	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
		BP,NB	1	36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
	153B	—	1	36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
	152H,152B	—	2	38 (965)	60 (1524)	17 (431)	33.88 (861)	1.75 (45)	61.69 (1567)
	152H	BP	2	38 (965)	60 (1524)	17 (431)	33.88 (861)	1.75 (45)	61.69 (1567)
361	152H,152B,153H,153B	NB,NI	3	40 (1016)	84 (2134)	18 (457)	—	—	—
	153H	—	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
		BP,NB	1	36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
	153B	—	1	36 (914)	60 (1524)	14 (356)	0.75 (19)	58.5 (1486)	34.5 (876)
	152H,152B	—	2	38 (965)	60 (1524)	17 (431)	33.88 (861)	1.75 (45)	61.69 (1567)
480	152H	BP	2	38 (965)	60 (1524)	17 (431)	33.88 (861)	1.75 (45)	61.69 (1567)
	152H,152B,153H,153B	NB,NI	3	40 (1016)	84 (2134)	18 (457)	—	—	—
	153H	—	1	36 (914)	51 (1295)	14 (356)	0.75 (19)	49.5 (1257)	34.5 (876)
		BP	3‡	40 (1016)	84 (2134)	18 (457)	—	—	—
	152H,153B	Any	3	40 (1016)	84 (2134)	18 (457)	—	—	—
480	152H	—	4‡	20 (508)	91.5 (2324)	20 (508)	—	—	—
	152H,152B	BP,NB	4‡	35 (889)	91.5 (2324)	20 (508)	—	—	—

★ Rating 20 Hp @208V, 25 Hp @240V, 50 Hp @ 480V, 60 Hp @ 600V

‡ Rating 25 Hp @208V, 30 Hp @240V, 60 Hp @ 480V, 75 Hp @ 600V

▲ 200 Hp @ 240V AC, 400 Hp @480V, 500 Hp @ 600V





Allen-Bradley

www.ab.com/catalogs
Publication 150-SG009F-EN-P

SMC, Allen-Bradley, Rockwell Software, Rockwell Automation, and LISTEN. THINK. SOLVE are trademarks of Rockwell Automation, Inc.
Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleerlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846