
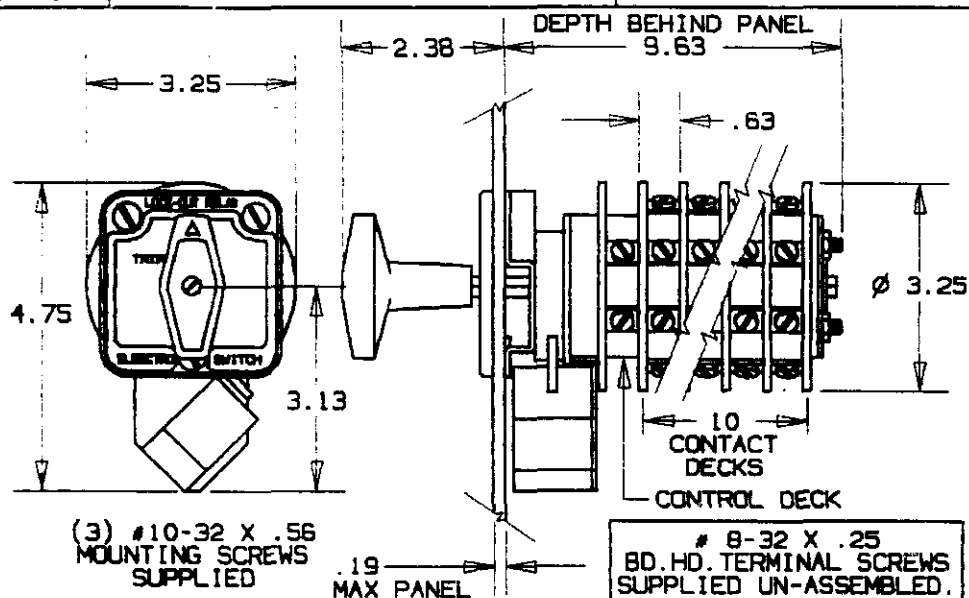


**ELECTROSWITCH**UNIT OF ELECTRO SWITCH CORP.
NEYMOUTH MASSACHUSETTS 02188
TEL: (617) 335-5200 FAX: (617) 335-4253**SERIES 24
MANUAL RESET
LOCKOUT RELAY****7810F**STANDARD
NAMEPLATE ENGRAVING

CODE 17C-2L22

**TRIP COIL SPECIFICATIONS**




NOMINAL VOLTAGE:	250 VDC
OPERATING RANGE:	70-280 VDC
THRESHOLD:	33 VDC (MIN)
COIL RESISTANCE:	104.0 Ω
COIL BURDEN:	2.4 AMP AT 250 VDC

FOR FURTHER INFORMATION REFER TO
TECHNICAL PUBLICATION LOR-1UL RECOGNIZED
CONTACT RATINGS


20A-120VAC	3A-125VDC
15A-240VAC	1A-250VDC
6A-600VAC	

TYPICAL CONTACT DECK LAYOUT

	CONTACTS	POSITION	
		TRIP	RESET
DECK 1	11 $\circ$ — — — $\circ$ 13		X
	12 $\circ$ — — — $\circ$ 18	X	
	15 $\circ$ — — — $\circ$ 17		X
	14 $\circ$ — — — $\circ$ 16	X	

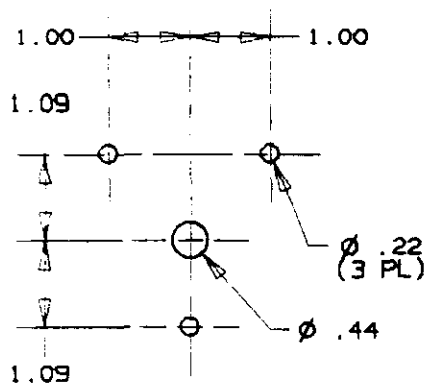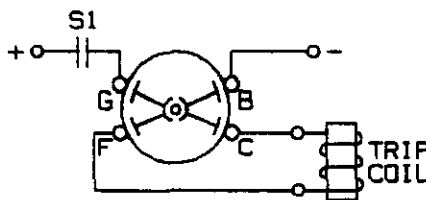ADDITIONAL CONTACT DECKS SAME AS
DECK 1 EXCEPT TERMINAL NUMBERS.
(DECK 2: 21 TO 28, DECK 3: 31 TO 38 ETC.)**PANEL DRILLING DIMENSIONS****CONTROL CIRCUIT**

LAYOUT



SCHEMATIC

	CONTACTS	POSITION	
		TRIP	RESET
CONTROL DECK	B $\circ$ — — — $\circ$ C		X
	F $\circ$ — — — $\circ$ G		X

MADE BY: I.R.U. DATE: 8/28/78

APPR BY: J.M. DATE: 8/28/78

DWG. NO:

SHEET 1 OF 1

REV

C

FN-

REVISIONS: WDS 2/4/93 JR
C EGN 20436