


Assembly parts

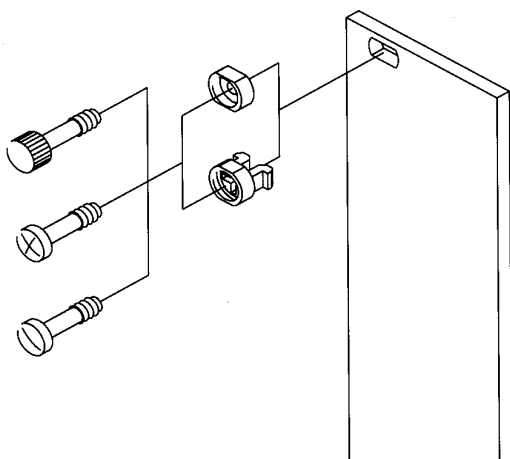

BZA46064

Sleeves and collar screws M 2.5

Application

Attachment of front panels.

The length of the collar screw depends on the threaded insert used.

Length 11.0 mm for standard threaded inserts

Length 12.3 mm for double T threaded inserts

Note

Plastic sleeves can be pressed in by hand. Metal sleeves (for grounding the front panel) must be pressed in with a tool, such as a lever press.

Description	Material/ Dimensions	Colour/ Finish	Order No. 1 kit (10 pcs)	Order No. 1 kit (100 pcs)
Plastic sleeve	POM	gray	-	21100-464
		black	-	21100-591
Metal sleeve	Brass	nickel-plated	21100-659	21100-660
		black	21100-885	21100-886
	V2A stainless		21100-661	21100-662
Collar screw – Slotted	M 2.5 x 11	nickel-plated	-	21100-379
		zinc-plated, black	-	21100-590
	M 2.5 x 12.3 When using double T threaded inserts	nickel-plated	-	21100-758
– Pozidrive	M 2.5 x 11	nickel-plated	-	21100-748
		black	-	21100-749
	M 2.5 x 12.3 When using double T threaded inserts	nickel-plated black	-	21101-101
– Knurled	M 2.5 x 11	nickel-plated	21100-268 1 kit (50 pcs)	-
– Knurled and slotted	M 2.5 x 11	nickel-plated	-	21101-106
Quick-release – with defined locking	locking pin: St; sleeve: POM	gray	21100-804	21100-753
		black	-	21100-755
– Knurled and slotted		gray	-	21100-754
		black	-	21100-756
Torx screw	2.5 x 9.3	Zn-plated	-	24560-141
Torx screw, special	M 4 x 14	Zn-plated	24560-131	24560-130
			24560-132 1 kit (18 pcs)	
	M 4 x 5	Zn-plated	-	24560-139
	M 4 x 6	Zn-plated	-	24560-135
Collar screw with torx	M 2.5 x 12.3	nickel-plated	-	21101-782
		black	-	21101-783

Threaded inserts Page 45.16