

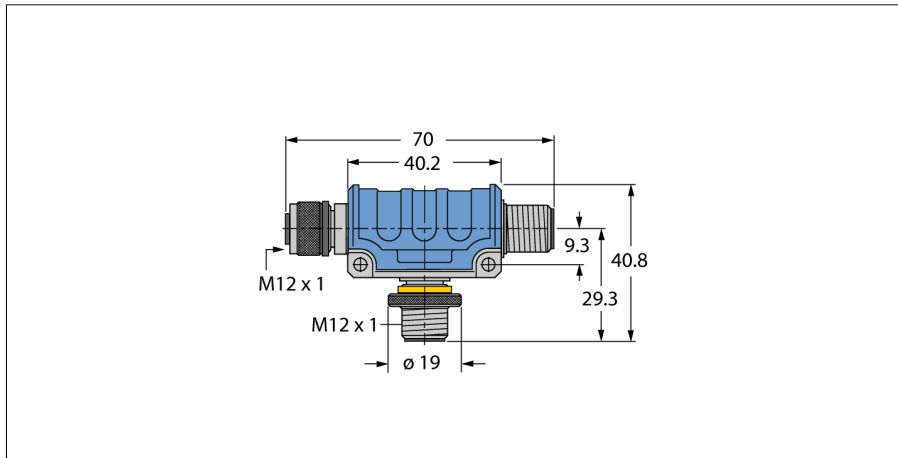






- M12 adapter
- T piece, 5-pole, reverse-keyed
- Direct coupling of several T pieces is possible
- 1.5 Mbps
- Only for PROFIBUS-DP applications in Ex area

Type designation	RKSW-2RSSW45-IS
Ident no.	6914214
Grip	Plastic
Grip	plastic
Contact carriers	Plastic
Contacts	metal, CuZn, Gold-plated
Seal	plastic
Protection class	IP67, A + B side screwed together
Mechanical lifespan	> 100 Mating cycles
Grip	plastic
Contact carriers	plastic
Contacts	Metal, CuZn, Gold-plated
Protection class	IP67, only when plugged in
Mechanical lifespan	> 100 Mating cycles
Rated voltage	30 V
Forward resistance	≤ 5 mΩ
Insulation resistance	≥ 10 ⁸ Ω



Note:
To be used only in conjunction with intrinsically safe circuits
Ci negligible
Li negligible