



### Cold applied connection kit

This connection kit is designed for terminating all Raychem BTV, QTVR, XTV, KTV and VPL industrial parallel heating cables to a junction box, whilst maintaining electrical insulation of the heating cable conductors and core.


It is approved for use in hazardous areas.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary). The non-curing sealant (silicone free) allows easy installation and facilitates maintenance purposes.

Two grommets supplied in this kit enable the gland to maintain optimum

sealing under various ambient conditions.

An additional locknut is provided for unthreaded entries.

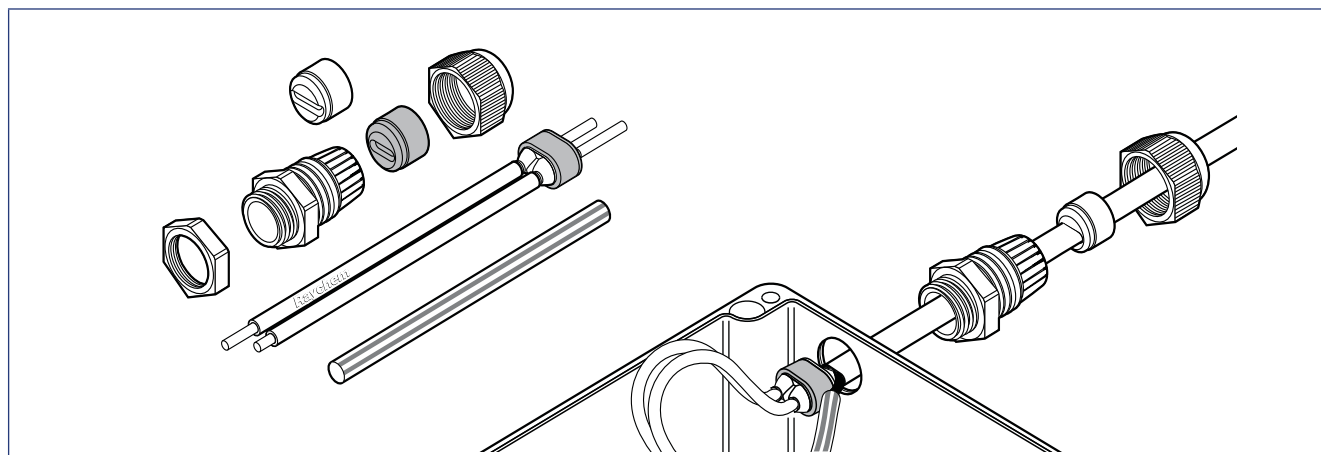

#### Application

Connection kit for BTV, QTVR, XTV, KTV and VPL parallel heating cables.

#### Kit contents

1 gland, 2 grommets, 1 locknut, 1 core sealer, 1 green/yellow tube, 1 installation instruction (multilingual)

#### Approvals

PTB 09 ATEX 1063 U

Ex II 2G Ex e II

Ex II 2D Ex tD A21 IP66

IECEX PTB 09.0040U

DNV Certificate No. E-8933 and E-8934

These products also have all required approvals for use in Kazakhstan, Russia and other countries. Contact your local Tyco Thermal Controls representative for more details.

#### Product specification

Area classification	Hazardous, Zone 1, Zone 2 (Gas), Zone 21, Zone 22 (Dust) Ordinary
Type	Cold applied
Thread size	M25 x 1.5
Min. ambient temperature	-50°C
Max. exposure temperature (gland)	110°C

#### Ordering details

Part description	C25-100
PN (Weight)	263012-000 (0.07 kg)