


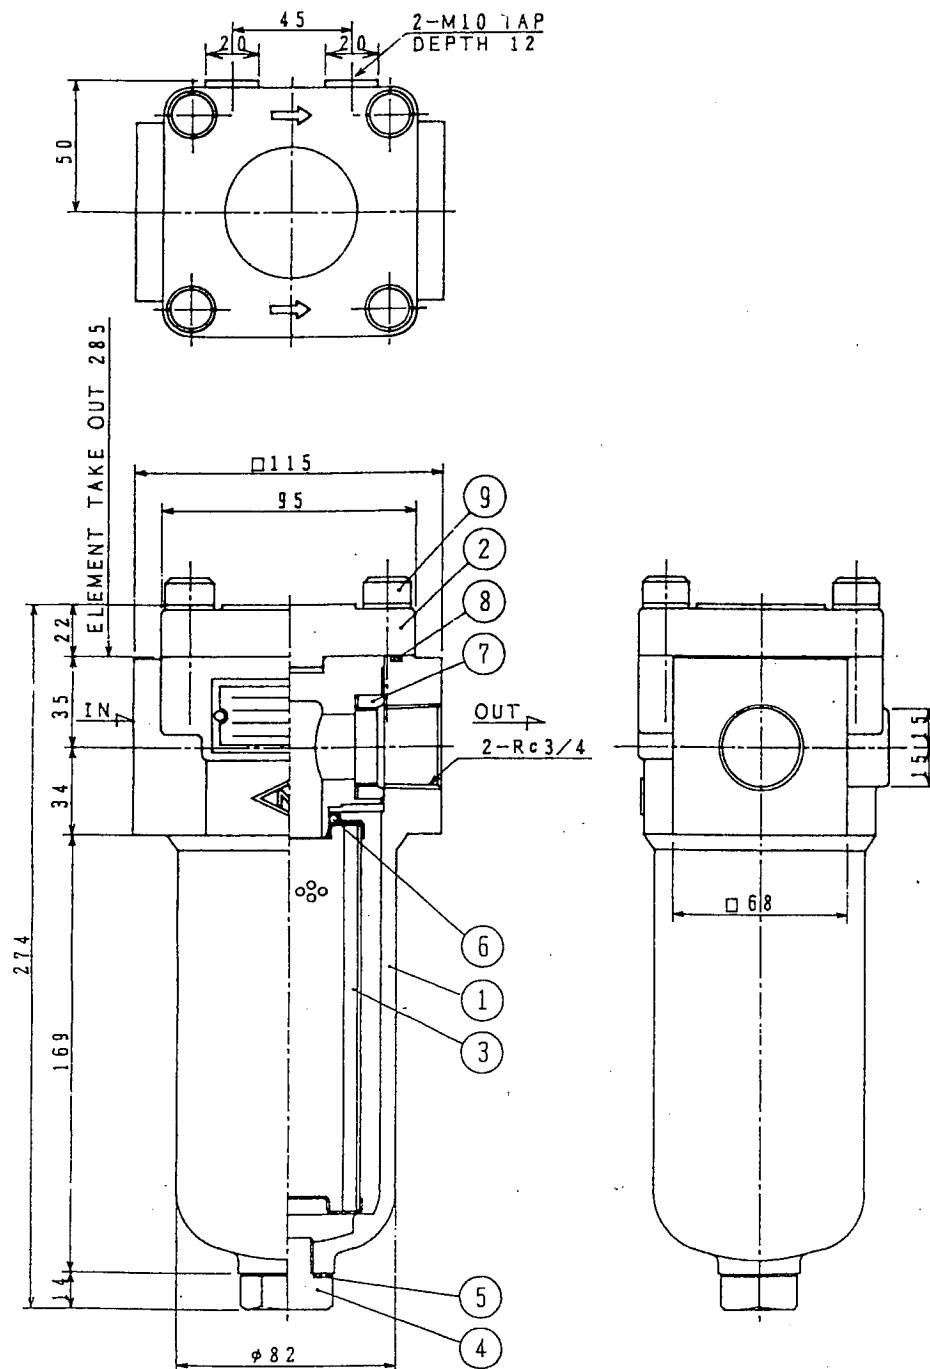

REVISIONS

MARK	REMARK	DATE	DRAWN	CHECKED
------	--------	------	-------	---------

DESCRIPTION

MODEL	FPM06-50A-036-X
PORT SIZE	IN, OUT-Rc3/4
ELEMENT RATE	50 MICRON ALUMI. NOTCH WIRE
ELEMENT SIZE	φ58×150L
MAX. PRESSURE	10 MPa (100kgf/cm ²)
TEST PRESSURE	15 MPa (150kgf/cm ²)
FLOW	7 ⁰ L/min
FLUID	MINERAL OIL
RELIEF VALVE CRACKING PRESSURE	0.34 MPa (3.5kgf/cm ²)
WEIGHT	abt. 10 kg

9	HEX. SOCKET BOLT	SUS304	4	M12×40 (42-80)
8	O-RING	NBR	1	JISB2401 G80
7	GASKET	NBR	1	
6	O-RING	NBR	1	JISB2401 P30
5	O-RING	NBR	1	JISB2401 P22
4	DRAIN PLUG	SS400	1	M20
3	ELEMENT	A1070W	1	50 μ
2	COVER	FCD, AC	1	
1	CASING	FCD500	1	
NO.	NAME OF PART	MATERIAL	Q'TY	REMARKS
3RD ANGLE		TITLE		
SCALE 1/2		10 MPa LINE FILTER		
APPROVED		MODEL NO.		
CHECKED M. HASUNUMA		FPM06-50A-036-X		
DRAWN Y. Nakata		DRAWING NO.		
DATE SEP. 16 '95		2806-112		
		MASUDA MFG. CO., LTD.		
		TOKYO JAPAN		
		D/# CA-44875		

P-13