


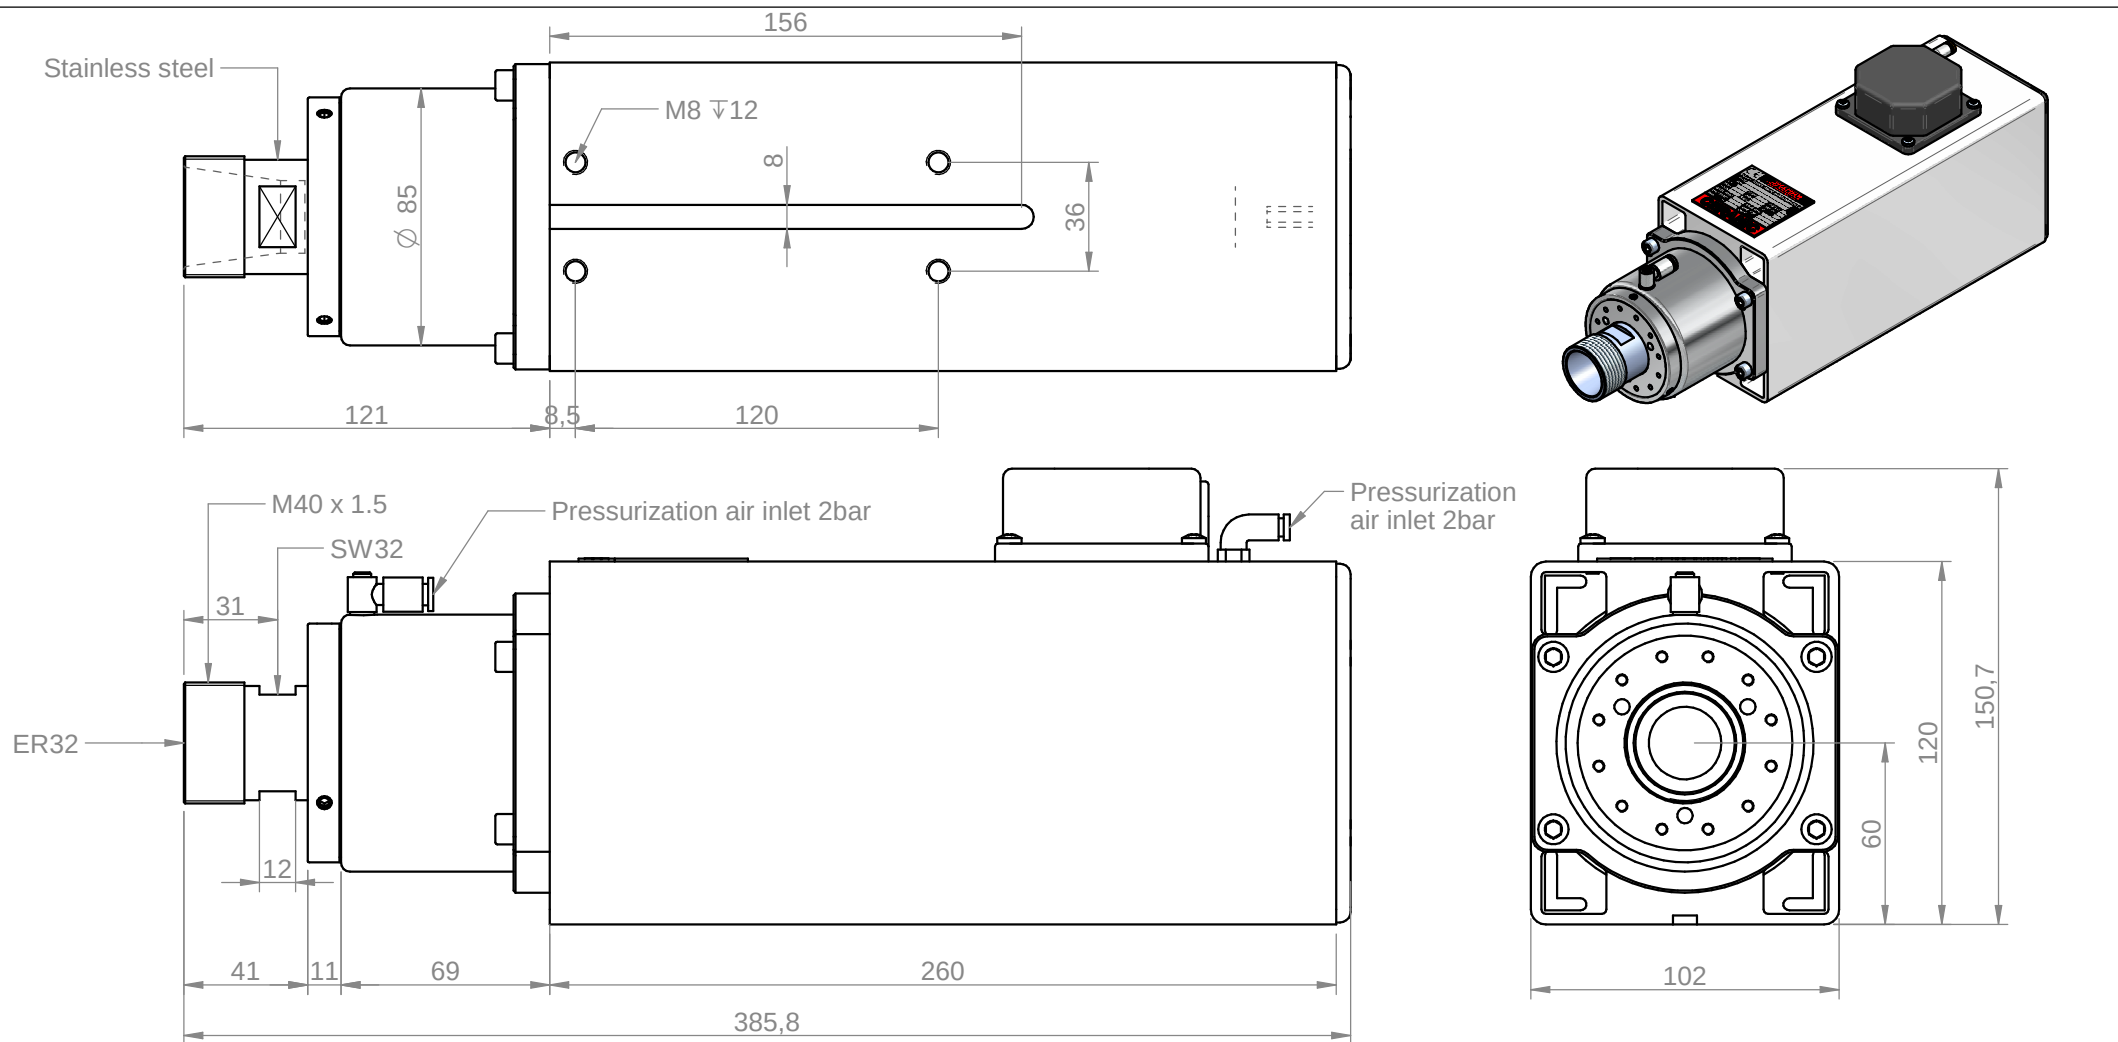

IP 64

USE DRIED AIR:
ACCORDING TO DIRECTIVE ISO 8573-1
CLEANLINESS CLASS 2/4/3
SOLID PARTICLES: 1 micron/1PPM
HUMIDITY: DEW POINT 3°C
OIL: 1mg/m³
USE 5 micron FILTER +
0,1 micron min OIL SEPARATOR.

Power [kW] 5.6		Base speed [rpm] 18000		Base voltage [V] 220/380		Base frequency [Hz] 300		 Teknomotor S.r.l. Via Argenega 19, I-32030 Quero (BL) www.teknomotor.com			
Min speed [rpm] 6000		Max speed [rpm] 24000		Part number 51600319		Internal code 51600319					
grado di equilibratura: 2.5 norma ISO 1940		equilibratura / balancing -		tool 	full key	tool 	half key				
Tolleranze non quotate: ±0.5mm Smussi non quotati: ±0.5mm				 = 0.8 	 = 3.2 	 = 12.5 	 = 	titolo/title 5160-D-DB-P-ER32 HY press.			
revisione n° 0		motivo di revisione Prima emissione						Cliente/Customer Catalogo			
dis. da / drawn Ing. Bottarel		appr. da / approved Ing. Perli	data / date 24/09/2013	sostituisce il		codice / drawing code 5Com51600319			disegno n° / drawing n° 2972		
				sostituito dal							
percorso / path						foglio / sheet 1 / 2		scala N.D.			A4

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.