



SAMIFLEX FLOATING SHAFT COUPLING

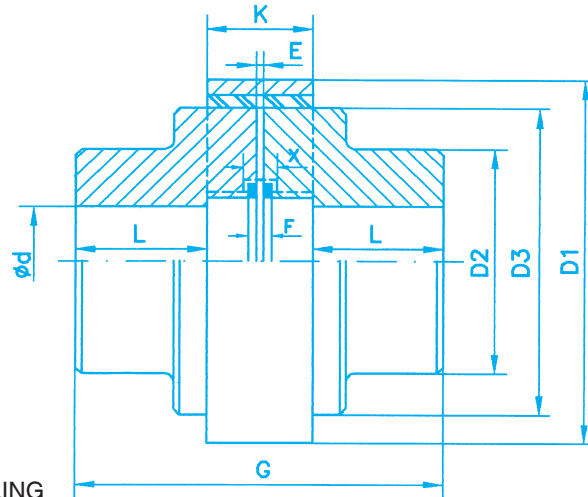

LIMITED END FLOAT COUPLING

Type FX

TYPE	NOMINAL TORQUE Nm	MAX. TORQUE Nm	MAX. SPEED R.P.M.	MAX. BORE d	D1 mm.	D2 mm.	D3 mm.	L mm.	K mm.	G mm.	E mm.	F mm.	X mm.
A4 FX	400	1.000	3.500	65	182	110	150	63	51	180	3,5	11,5	12,5
A45 FX	700	1.750	3.100	75	202	125	170	70	56	198	3,5	11,5	12,5
A5 FX	1.000	2.500	2.900	85	225	140	190	77	59	216	3,5	14,5	16,0
A55 FX	1.500	3.000	2.600	95	250	155	215	90	64	246	3,5	14,5	16,0
A6 FX	2.000	4.000	2.500	110	265	180	233	95	67	260	3,5	18,5	20,5
A7 FX	4.000	8.000	2.200	130	306	205	267	116	75	310	4	18,5	20,5
A8 FX	7.500	15.000	1.850	150	363	242	326	147	85	382	5	21,0	24,0
A9 FX	12.500	25.000	1.600	180	425	280	385	162	92	420	5	21,0	24,0
A10 FX	25.000	40.000	1.250	210	523	330	483	188	102	482	6	22,0	26,0

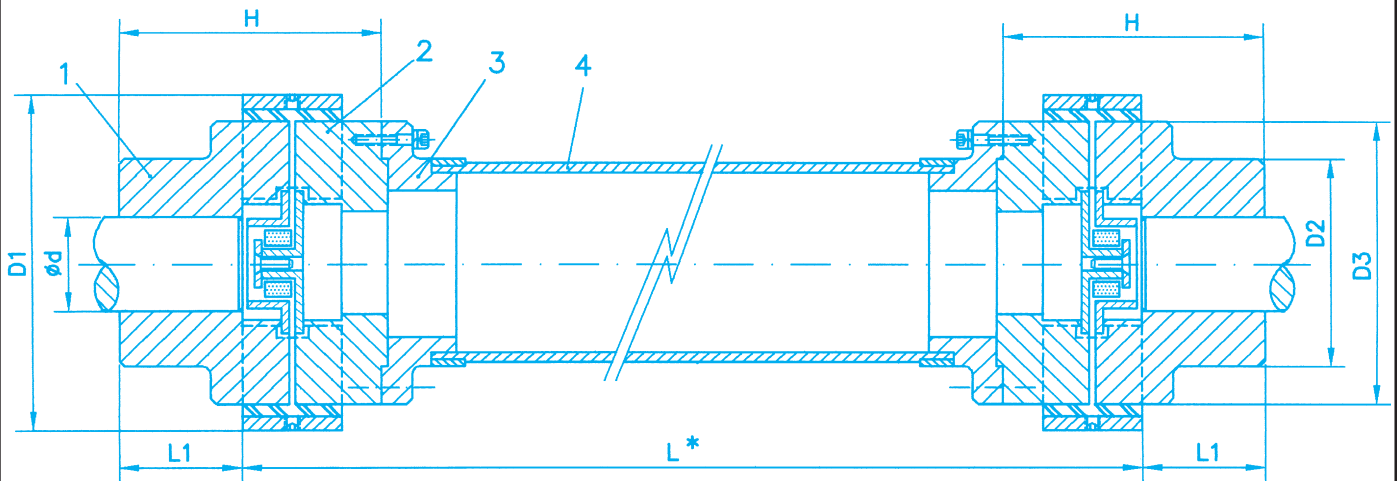

FLOATING SHAFT COUPLING

Type FXX

TYPE	NOMINAL TORQUE Nm	MAX. TORQUE Nm	MAX. SPEED R.P.M.	MAX. BORE d	D1 mm.	D2 mm.	D3 mm.	L1 mm.	H mm.	L* MAX. mm.
A4 FXX	400	1.000	1.800	65	182	110	150	63	150	3.400
A45 FXX	700	1.750	1.800	75	202	125	170	70	160	3.400
A5 FXX	1.000	2.500	1.800	85	225	140	190	77	175	4.300
A55 FXX	1.500	3.000	1.800	95	250	155	215	90	195	4.300

- REF. 1-2-3, MATERIAL; ZINC PLATED STEEL (CORROSION RESISTANCE).
- REF. 4, MATERIAL: CARBON FIBRE COMPOSITE OR ZINC PLATED STEEL.
- TYPICAL APPLICATIONS INCLUDE COOLING TOWER DRIVES, AND PAPER MACHINE DRIVES.