



Position switch

E 12 R - 5m

Material number: 1044365 (Material number old: 12709912)


Features/Options:

- Metal enclosure
- Snap action, change-over contact with single break
- Suitable for in-line mounting
- With pre-wired cable, cable length 5 m

Notes

- Actuator can be repositioned by 90° on request

Dimensions

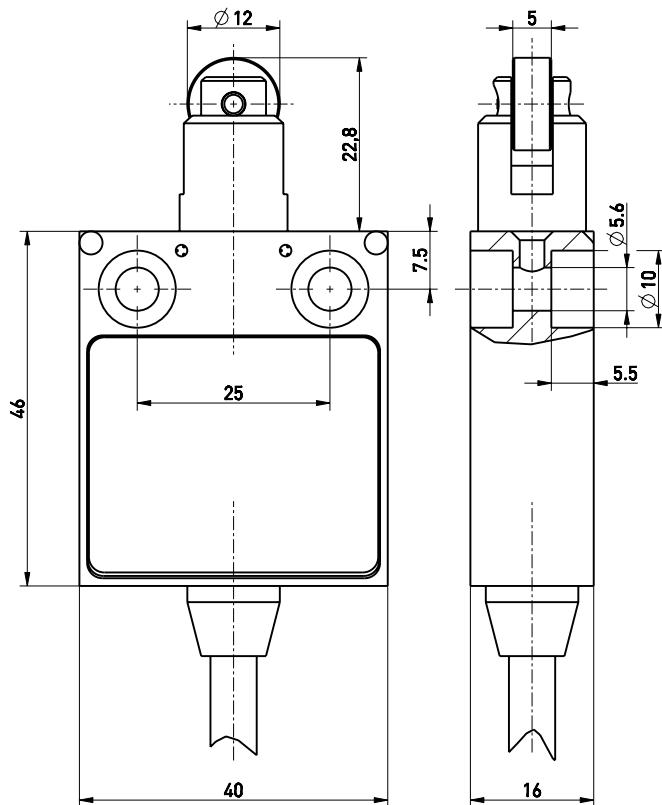

Technical data

Standards	EN 60947-5-1
Enclosure	aluminium die-cast, enamel finish
Degree of protection	IP 67 to IEC/EN 60529
Contact material	silver
Switching elements	change-over contact with single break Form C
Switching system	snap action
Connection	pre-wired cable H05VV-F
Cable cross-section	4 x 0.75 mm ²
U_{imp}	4 kV
U_i	250 V
I_{the}	5 A
Utilisation category	AC-15; DC-13
I_e/U_e	5 A/250 VAC; 0.16 A/230 VDC
Max. fuse rating	5 A gG/gN fuse
Mechanical life	> 1 million operations
Operation cycles	1800/h
Ambient temperature	-20 °C ... +75 °C
Approvals	
Weight	475 g




Position switch

E 12 R - 5m

Material number: 1044365 (Material number old: 12709912)

Switching diagram

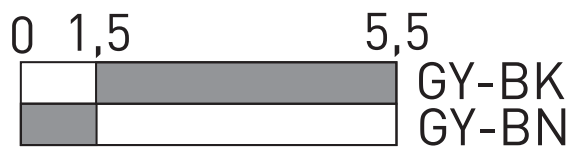

Contact diagram

