




MOTOR CAPACITORS SERIES WB 40....

IVD GmbH
Max-Eyth-Str. 10, 74405 Gaildorf
Tel. 07971/9789-0 Fax 07971/9789-29
Datum: 05.10.2017

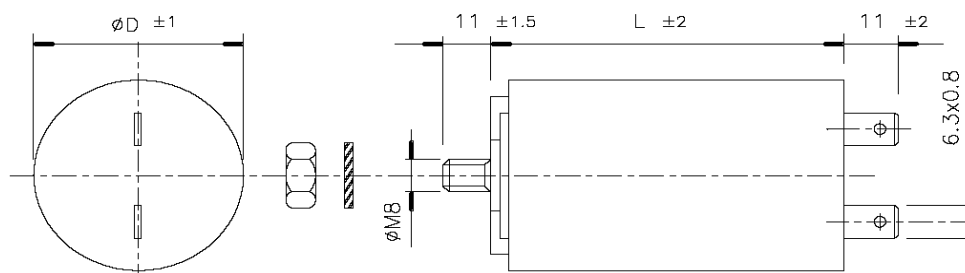

L = 91 mm
D = 45 mm

	Model	ECOFILL WB 40 400 / A	
1	Dielectric	METALLIZED POLYPROPYLENE	
2	Filling	RESIN	
3	Case material	Thermoplastic Self-Estinguish V2" Class	
4	Capacitance / Tolerance	40 µF ±5%	
5	Rated frequency	50 Hz – 60 Hz	
6	Rated voltage	a) AC 400 V	1µF....50µF
		b) AC 450 V	1µF....25µF
7	Type of operation	DB	
8	Life expectancy	a) B b) C	
9	Class of operation	a) 10.000 h	
		b) 3.000 h	
10	Climatic Category	40/085/21	
11	Class of safety protection	S0	
12	Test Voltage between terminals	2,15 U _N x 2"	
13	Test Voltage between terminals to case	2.500 V x 2"	
14	Insulating Resistance between terminals	10 x 10 ³ MΩ x µF	
15	Tan δ	<=5 x 10 ⁻⁴	
16	DV/dt (typical)	10 V/µs	
17	Tested and Certified according to	EN 60252-1 : 2014	
18	Certification marks	VDE	