

Identification System CIS



EUCHNER

More than safety.



Headquarters in Leinfelden-Echterdingen



Logistics center in Leinfelden-Echterdingen



Production location in Unterböhringen

Internationally successful – the EUCHNER company

EUCHNER GmbH + Co. KG is a world-leading company in the area of industrial safety technology. EUCHNER has been developing and producing high-quality switching systems for mechanical and systems engineering for more than 50 years.

The medium-sized family-operated company based in Leinfelden, Germany, employs more than 500 people around the world, 400 in Germany alone.

In addition to the production locations in Unterböhringen and Shanghai/China, 14 subsidiaries and other sales partners in Germany and abroad work for our international success on the market.

Quality and innovation – the EUCHNER products

A look into the past shows EUCHNER to be a company with a great inventive spirit. We take the technological and ecological challenges of the future as an incentive for extraordinary product developments.

EUCHNER safety switches monitor safety doors on machines and installations, help to minimize dangers and risks and thereby reliably protect people and processes. Today, our products range from electromechanical and electronic components to intelligent integrated safety solutions. Safety for people, machines and products is one of our dominant themes.

We define future safety technology with the highest quality standards and reliable technology. Extraordinary solutions ensure the great satisfaction of our customers. The product ranges are subdivided as follows:

- ▶ Transponder-coded Safety Switches (CES)
- ▶ Transponder-coded Safety Switches with guard locking (CET)
- ▶ Interlocking and guard locking systems (Multifunctional Gate Box MGB)
- ▶ Access management systems (Electronic-Key-System EKS)
- ▶ Electromechanical Safety Switches
- ▶ Magnetically coded Safety Switches (CMS)
- ▶ Enabling Switches
- ▶ Safety Relays
- ▶ Emergency Stop Devices
- ▶ Hand-Held Pendant Stations and Handwheels
- ▶ Safety Switches with AS-Interface
- ▶ Joystick Switches
- ▶ Position Switches



Identification System CIS

General Information	4 - 5
System Overview	6 - 8
Identification system CIS3	9
Read-only heads CIS3 with parallel interface	12
Read/write head CIS3 with serial interface	14
Data carrier CIS3	16
Connection cables and documentation CIS3	18
Identification system CIS3A	19
Read-only heads CIS3A with parallel interface	22
Read/write head CIS3A with serial interface	26
Data carrier CIS3A	28
Connection cables and documentation CIS3A	29
Identification system CIS3A-Mini	31
Read-only interface adapter CIS3A-Mini with parallel interface	34
Read/write interface adapter CIS3A-Mini with serial interface	36
Read/write head CIS3A-Mini	38
Data carrier CIS3A-Mini	39
Connection cables and documentation CIS3A-Mini	40
Transponder Coding (TC)	41
Mobile Hand-Held Terminal MHT-G2	43
Mobile hand-held terminal Basic unit MHT-G2-BU	44
Ordering guide mobile hand-held terminal	45
Item Index	46

Inductive Identification System CIS

Applications

Inductive identification systems are used for the non-contact identification of products such as tools, product carriers or containers in the entire manufacturing and logistics sector. The data carriers for the identification systems CIS are mostly programmed with a unique sequential number. The product is identified at a read station using this number and the related production data are then assigned to the product.

The data carriers are read using a completely wear-free inductive coupling. The read heads and data carriers are of robust design, have a high degree of protection and are designed for harsh industrial usage. The identification system will also work without problems when subject to dirt and moisture.

System overview and function

The identification system CIS essentially comprises the following components:

- ▶ Data carrier
- ▶ Read-only station or read/write station with data interface

The identification systems CIS3, CIS3A and CIS3A-Mini are very similar with regard to the interfaces to the higher level control system. As a result the integration into the control system is similar. There are differences, on the one hand, in the design of the antenna and, on the other hand, in the design of the components. The special features and advantages of the individual systems as well as the related system components are divided into separate sections for the systems CIS3, CIS3A and CIS3A-Mini. The components for the different identification systems CIS3, CIS3A and CIS3A-Mini must not be mixed between the systems, i. e. a CIS3 read head is not suitable for reading a CIS3A data carrier.

The read stations and read/write stations for the CIS3 and CIS3A are fitted compactly in one housing. In the case of the CIS3A-Mini the stations are split in two for space reasons, that is interface adapter and antenna are connected via an antenna cable.

Power is supplied to the transponder and the data are transferred between the read/write station and the data carrier without using any contacts.

The CIS identification system operates on the principle of inductive coupling in the near field, based on a carrier frequency of 125 kHz. This standard frequency at the low end of the frequency band used for RFID applications makes it possible, if necessary, to even install the data carrier flush in metal. However, it will certainly be of advantage if a non-metallic material is used in the immediate area around the data carrier.

A memory chip and an antenna are fitted in the data carrier, in various shapes (transponder). The EPROM to which data can be written (programmable) retains the data in non-volatile form. For all standard data carriers used for CIS the following applies:

- ▶ Transponder without battery
- ▶ Robust encapsulated data carrier housing with degree of protection IP67

The read-only stations communicate with the higher level control system via a 4-bit parallel interface and the read/write stations via a serial interface.

Integration for read-only operation

The identification system CIS is mostly used in installation as a read-only system with the 4-bit parallel interface. The advantage of the parallel interface is simple integration into the control system and the transparent representation of the data. Quick and therefore low-cost integration into any type of PLC is possible.

The 4 data wires, which are connected directly to the PLC via inputs and outputs (I/O), represent at a point in time a related hex digit using high/low levels (24 V/0 V). After the read station is switched on, the level on all 4 wires is initially high. If a data carrier now enters the operating distance of the read station, first the data are automatically transferred from the data carrier to the memory in the read station and stored there temporarily. In the second step, the data are actively retrieved from the memory in the read station by the control system. For the second step it is no longer necessary for the data carrier to be in the read head's operating distance.

The read station saves the data from a data carrier read until the next data carrier is fed to the read station or the read station is switched off and on again. In the case of the CIS3A-Mini it is also possible to delete the temporary memory in the read station via a reset pulse. If there is a data carrier in front of the read head, the data are transferred again automatically.

In the first step, it is signaled to the control system via the high level on the STROBE output on the read station that there is a data carrier in the operating distance and new data are available in the memory on the read station. The STROBE output is set to the high level when the first 4 hex digits on the CIS3/CIS3A and the first 8 hex digits on the CIS3A Mini are available in the memory on the read station. If in the case of the CIS3/CIS3A more than 4 hex digits are required in the application, it is necessary to wait long enough until all the digits have been transferred to the memory in the read station (see pulse diagram in the manual for the read station). If, for some reason (e. g. excessively high relative speed), it was not possible to read all the digits, on the output of the data F_{hex} is output as an error message from the point at which the data were no longer read from the data carrier.

In the second step, the data can be retrieved from the temporary memory in the read station by the control system. A value between 0 and 15 is represented at a point in time via a combination of high/low levels on the data outputs on the read station using binary coding (high level on A=1, B=2, C=4, D=8). The first digit from the data carrier is indicated immediately on the 4-bit data wire. Using pulses from the control system on the SKIP input on the read station, a maximum of 32 hex digits (16 bytes) can be read with the CIS3/CIS3A and 8 hex digits (4 bytes) with the CIS3A Mini. Reference is to be made to the pulse diagram in the manual for the read station for information on the timing of the pulses.

If the SKIP input on the read station is maintained static at a high level, no data are transferred from the data carrier into the memory in the read station. By maintaining the SKIP signal at the high level prior to the entry of the data carrier in the operating distance, on the change in the SKIP signal to the low level the data can be read statically at this defined point in time. As long as the SKIP input is maintained at the high level, the STROBE output remains at the low level, even if there is a data carrier in the operating distance of the read head. The signaling that there is a read head in front of the read head must therefore be provided separately if you want to use this reading method. On the application of this method of control, a CIS3 data carrier can, for instance, approach the read head in the opposite direction to the arrow.

In typical applications 2, 3 or 4 digits of these 8 (CIS3AMini) or 32 (CIS3/CIS3A) possible digits are combined to form a number and used in the application. Hereby, e. g. 150 product carriers (3 digits) with 001, 002, 003 to 150 are sequentially numbered in decimal notation. The definition of the sequence of numbers with leading zeros produces a logical series. The data carrier then has a data record address that is used to store the actual production information in the control system. In this example with 3 available digits, 999 different product carriers could be addressed in decimal notation. In the case of a 3-digit number, the data are provided on the 4-bit data wire in the following sequence: the first digit is displayed automatically, the second digit is displayed after the first SKIP pulse from the control system and the third digit is displayed after the second SKIP pulse.

There exist the following possible ways of programming the data carriers with digits:

- Order programmed data carriers
- Program in-house using read/write station with serial interface
- Program in-house using mobile hand-held terminal

The data carrier can be written (programmed) for read-only operation on customer request and also visibly labelled using a laser. In this case a data carrier programming and labelling information form is to be completed with the order. This form is available for download from www.euchner.de.

You will have significantly more flexibility if you have your own facility for data carrier programming. The read/write station for the related identification system with a serial interface can be used on a PC for easy

writing to the data carriers (programming). For this purpose the programming software Transponder Coding (TC) is installed on the PC. TC is an ASCII/hex editor with which it is easy to write to and read from the data carrier on the PC.


It is also possible to write to and read from data carriers with the aid of the portable mobile hand-held terminal MHT-G2. For this purpose a read/write head to suit the related identification system is fitted. The data carriers can be read and written (programmed) using the software Transponder Coding CE (TCCE). TCCE is an ASCII/hex editor with which it is easy to write to and read from the data carrier on the MHT.

Integration for read/write operation


In the case of read/write stations with serial interface, the data communication is according to the 3964R transfer protocol. The individual commands, e. g. for reading the data or writing the data, are described in the device-specific manuals. For unusual CIS applications in which data carriers must also be re-programmed during production, the application is programmed in the control system with the aid of these commands based on the 3964R transfer protocol.

Interfacing of a read/write station with serial interface to the user's PC-based application is supported by the optionally available ActiveX® modules (can be used if Microsoft Windows®-based user programs support ActiveX®). CIS can thus be used in conjunction with PC-based control software or visualization software. The ActiveX® module is used here as a protocol driver for the 3964R transfer protocol. You can obtain further information on the usage of an ActiveX® module on request.

Block diagram identification system CIS3/CIS3A

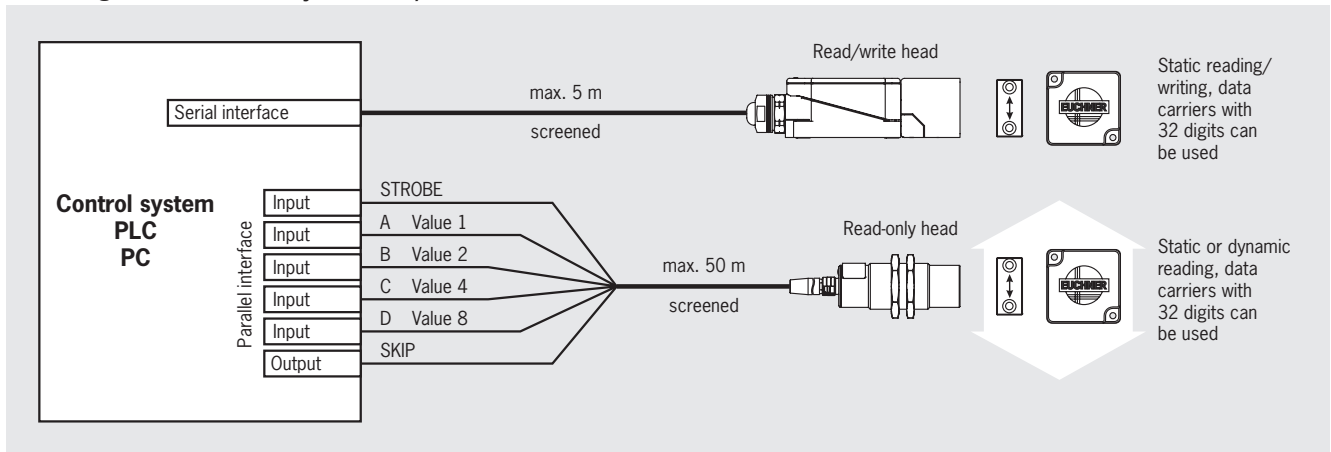

Block diagram identification system CIS3A-Mini

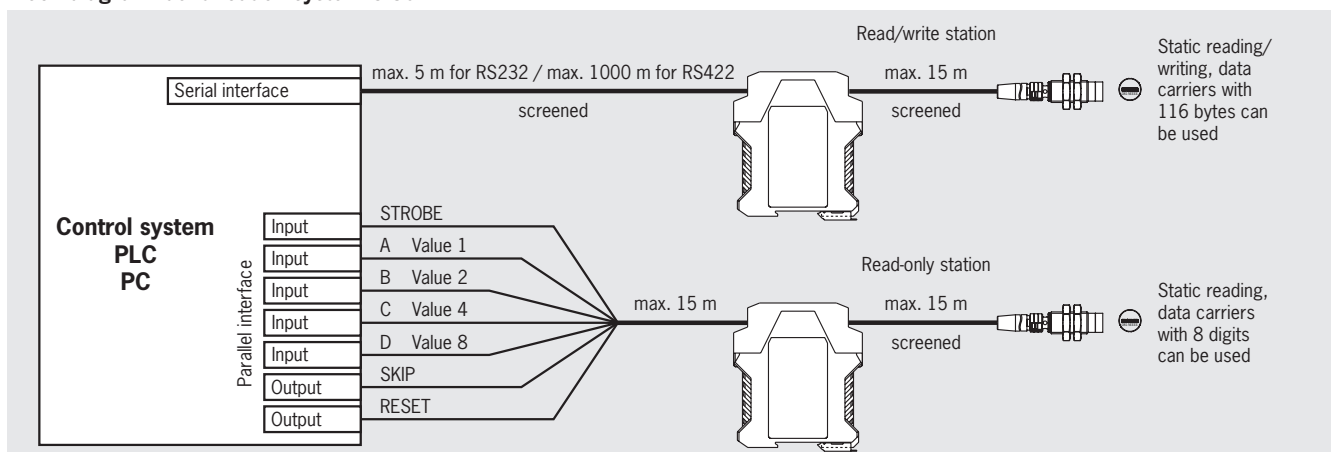









Microsoft Windows® and ActiveX® are registered trademarks of Microsoft Corporation





Features and possible combinations for CIS components









Key to symbols	●	Combination possible					
		Combination not permissible					
Identification system	Features	Applications	Interface adapter, read/write head	Data carriers			
				CIS3P35X16SH16Y... All items	CIS3P16D08KH16YSNO... All items	CIS3AP50X50SH16YSNO... All items	CIS3AP10D05KH01K... All items
CIS3	Read distance max. 18 mm Dynamic reading up to 410 mm/s	Coding of recirculating product carriers or larger tools with standard read distances	Read-only head CIT3PL1N30-STA 071 552	●	●		
			Read-only head CIT3PL1N30-STR 071 950	●	●		
			Read/write head CIT3SX1R1G05KX 096 560	●	●		
CIS3A	Read distance max. 28 mm Dynamic reading up to 230 mm/s	Coding of slowly recirculating product carriers or very large tools at increased read distances	Read-only head CIT3APL1N30-STA 071 900			●	
			Read-only head CIT3APL1G05ST 077 805			●	
			Read/write head CIT3ASX1R1G05KX 077 890			●	● ¹⁾
CIS3A-Mini	Miniature dimensions Read distance max. 6.5 mm	Coding of tools or small product carriers	Interface adapter CIA3... All items with read/write head CIT3ASX1N12ST 077 940				●

1) To set up a programming station for CIS3A-Mini data carriers, a CIS3A read/write head can be used.

Identification system CIS3			
	Interface adapters	Read/write heads	Data carriers
Read only	Parallel interface integrated in the read head	 <p>CIT3PL1N30-ST...</p> <ul style="list-style-type: none"> Read-only head Cylindrical design M30 M12 plug connector Axial or radial connection (see page 12) 	 <p>CIS3P35X16SH16YHNO...</p> <ul style="list-style-type: none"> Cube-shaped Approach direction horizontal (see page 16)
Read / write	Serial interface integrated in the read/write head	 <p>CIT3SX1R1G05KX</p> <ul style="list-style-type: none"> Read/write head Housing according to EN 50041 Connection terminals (see page 14) 	 <p>CIS3P35X16SH16YVNO...</p> <ul style="list-style-type: none"> Cube-shaped Approach direction vertical (see page 16)
			 <p>CIS3P16D08KH16YSNO...</p> <ul style="list-style-type: none"> Cylindrical Ø 16 mm (see page 17)

Identification system CIS3A			
	Interface adapters	Read/write heads	Data carriers
Read only	Parallel interface integrated in the read head	 <p>CIT3APL1N30-STA</p> <ul style="list-style-type: none"> Read-only head Cylindrical design M30 M12 plug connector Axial connection (see page 22) 	 <p>CIS3AP50X50SH16YSNO...</p> <ul style="list-style-type: none"> Square (see page 28)
Read / write	Serial interface integrated in the read/write head	 <p>CIT3ASX1R1G05KX</p> <ul style="list-style-type: none"> Read/write head Housing according to EN 50041 Connection terminals (see page 26) 	

Identification system CIS3A-Mini			
	Interface adapters	Read/write heads	Data carriers
Read only	Parallel interface  CIA3PL1G08 Plug-in screw terminals (see page 34)	 <p>CIT3ASX1N12ST</p> <ul style="list-style-type: none"> Read/write head Cylindrical design M12 M8 plug connector Axial connection (see page 38) 	 <p>CIS3AP10D05KH01K...</p> <ul style="list-style-type: none"> Cylindrical Ø 10 mm (see page 39)
Read / write	Serial interface  CIA3SX1R1G08 Plug-in screw terminals (see page 36)		


Mobile hand-held terminal MHT-G2	
Basic unit	Accessories
 <p>MHT-G2-BU</p> <ul style="list-style-type: none">► For reading and programming the data carriers► With touch-pen and cover for rechargeable battery compartment (see page 44)	 <p>Rechargeable battery MHT-G2-BA (see page 45)</p>
	 <p>SD memory card MHT-G2-SD-TCCE ► With software <i>Transponder Coding CE (TCCE)</i> (see page 45)</p>
	 <p>Docking station MHT-G2-DS ► With power supply unit and USB connecting cable (see page 45)</p>
	 <p>Extension cable ► For read/write head (see page 45)</p>
	 <p>Read/write head CIT3-H2 ► For identification system CIS3 (see page 45)</p>
	 <p>Read/write head CIT3A-H2 ► For identification system CIS3A (see page 45)</p>
	 <p>Read/write head CIT3A-MINI-H2 ► For identification system CIS3A-Mini (see page 45)</p>

Identification System CIS3








- ▶ Low-cost read/write system with predominantly used, separate read-only heads
- ▶ Extremely compact head design, no separate interface adapter required
- ▶ Read distance maximum 18 mm
- ▶ Dynamic reading with a relative speed up to 410 mm/s
- ▶ Data carrier memory capacity 16 bytes E²PROM read/write
- ▶ Easy connection of the read-only heads to I/O on any control system via 4-bit parallel interface (24 V)
- ▶ Read/write heads with serial interface RS232

The identification system CIS3 is the predominantly used standard system in the CIS system family. The CIS3 features compact data carriers.

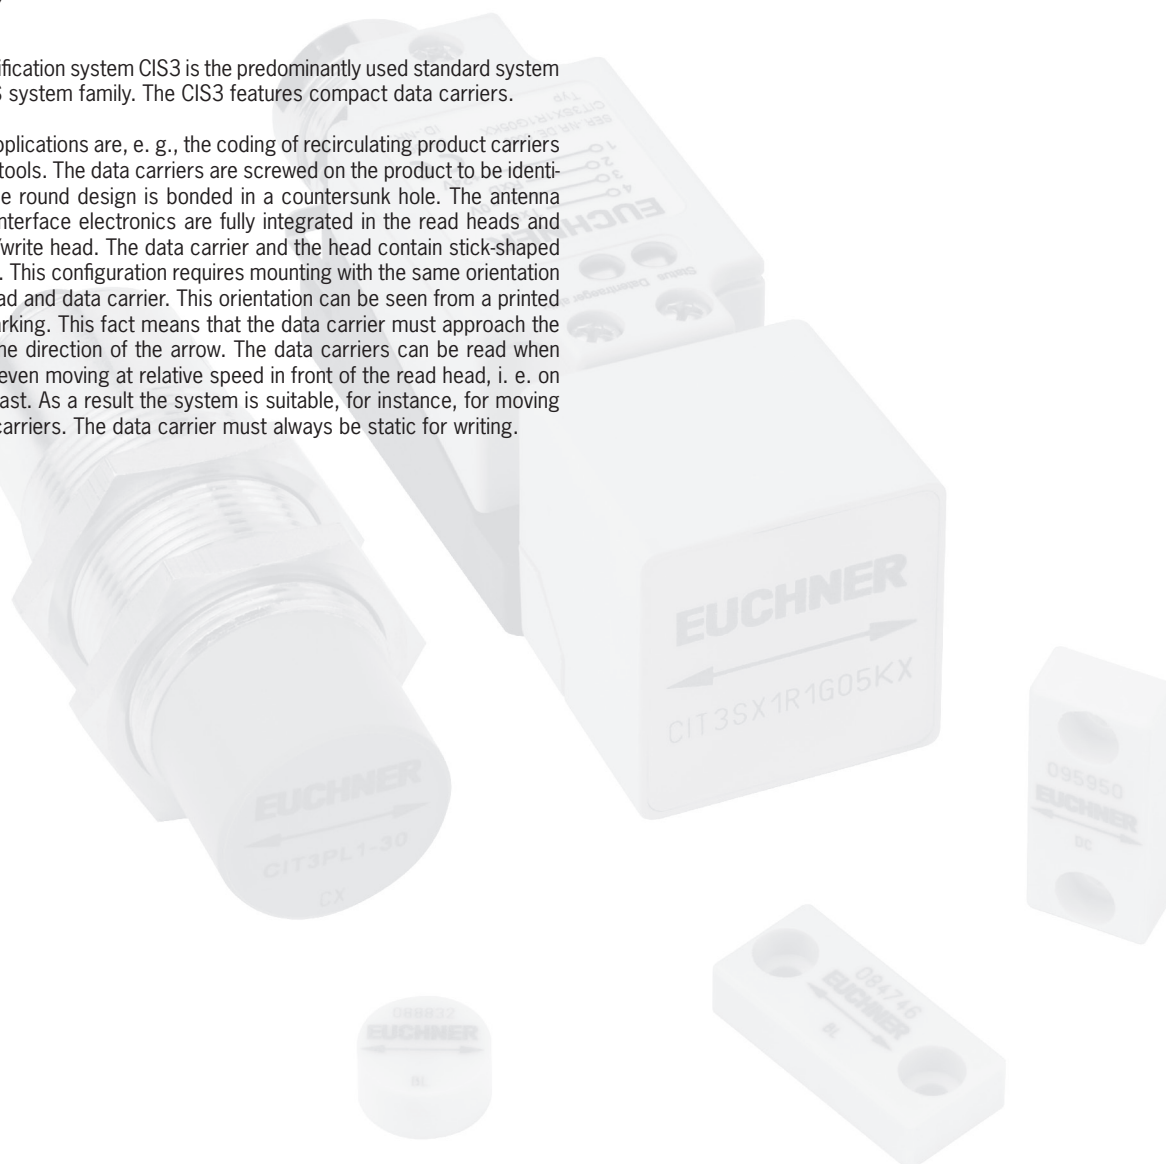Typical applications are, e. g., the coding of recirculating product carriers or larger tools. The data carriers are screwed on the product to be identified or the round design is bonded in a countersunk hole. The antenna and the interface electronics are fully integrated in the read heads and the read/write head. The data carrier and the head contain stick-shaped antennae. This configuration requires mounting with the same orientation of the head and data carrier. This orientation can be seen from a printed arrow marking. This fact means that the data carrier must approach the head in the direction of the arrow. The data carriers can be read when static or even moving at relative speed in front of the read head, i. e. on moving past. As a result the system is suitable, for instance, for moving product carriers. The data carrier must always be static for writing.



Selection table for identification system CIS3

	Connection cable	Read/write heads	Data carriers
Read only	 Page 18	Read-only head CIT3PL1N30-STA  Page 12	Horizontal CIS3P35X16SH16YHNO...  Page 16
		Read-only head CIT3PL1N30-STR  Page 12	Vertical CIS3P35X16SH16YVNO...  Page 16
Read / write		Read/write head CIT3SX1R1G05KX  Page 14	CIS3P16D08KH16YSNO...  Page 17

Possible combinations for CIS3 components

To give you a quick overview of which CIS3 components can be combined with each other, there is a combinations table for each read head. The table will answer the following questions:

- Which data carrier can be read by the selected read head?
- What is the operating distance of this combination?

Key to symbols	L 18	Combination possible, max. read distance 18 mm
	S 9	Combination possible, max. write distance 9 mm
		Combination not permissible

Identification system CIS3

Read/write heads	Data carriers	
	CIS3P35X16SH16Y... All items	CIS3P16D08KH16YSNO... All items
Read-only head CIT3PL1N30-STA 071 552	L 18	L 14
Read-only head CIT3PL1N30-STR 071 950	L 18	L 14
Read/write head CIT3SX1R1G05KX 096 560	L 18 S 10	L 14 S 9

Read-only heads CIT3PL1N30-ST...

- ▶ Parallel interface
- ▶ Cylindrical design M30
- ▶ M12 plug connector
- ▶ Axial or radial connection



For possible combinations see page 11

Mounting instructions

On mounting the read head and data carrier, it is to be ensured the crossing direction as per the direction of the arrow on the active face of the read head is observed.


Attention:

On the usage of a screened cable the connection cable is allowed to be max. 50 m long.

Read-only head CIT3PL1N30-STA

M12 plug, 8-pin, axial connection

Dimension drawing

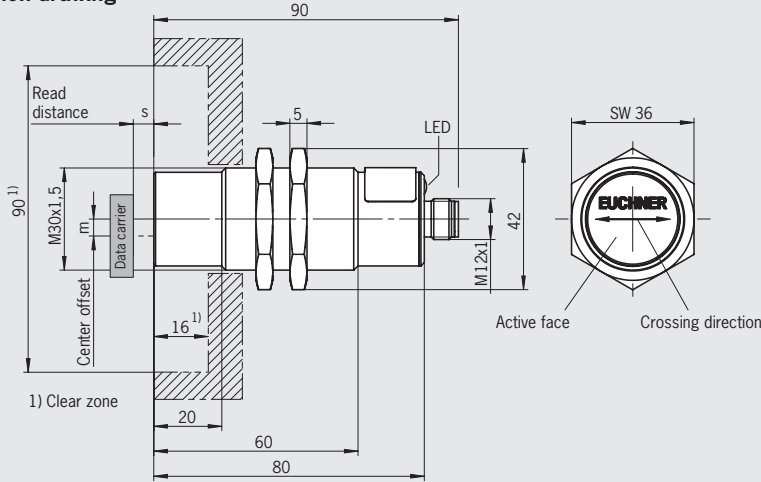


For connection cable see page 18

Read-only head CIT3PL1N30-STR

M12 plug, 8-pin, radial connection


Dimension drawing

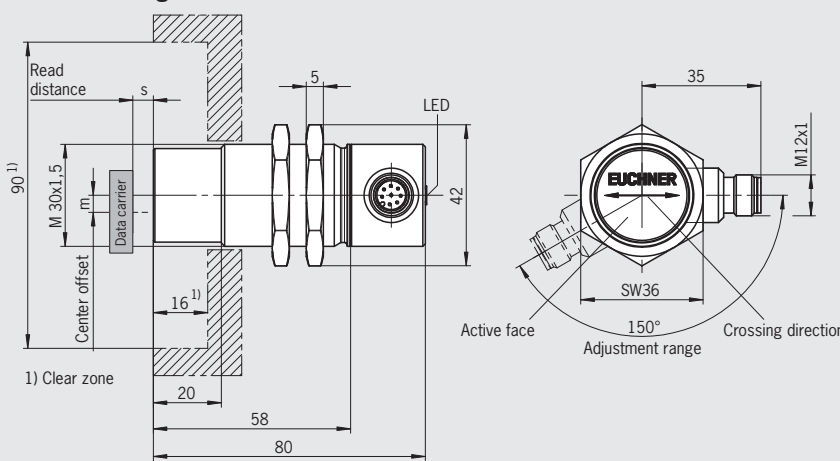

For connection cable see page 18

Pin assignment

Pin	Designation	Description	Wire color
1	0V/GND	Ground, DC 0 V	WH
2	24 V/U _B	Power supply, DC 24 V	BN
3	A	Output data wire A	GN
4	B	Output data wire B	YE
5	C	Output data wire C	GY
6	D	Output data wire D	PK
7	SKIP	Input data clock	BU
8	STROBE	Output data carrier active	RD
-		Screen	Open



View on the connection side of the read head

The screen on the connection cable is connected to the read head's housing via the knurled nut on the M12 plug connector.

Ordering table

Series	Interface	Connection	Order no. / item
Read-only head for CIS3	Parallel	M12 plug connector axial connection	071 552 CIT3PL1N30-STA
		M12 plug connector radial connection	071 950 CIT3PL1N30-STR

Technical data read-only heads CIT3PL1N30-ST...

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Brass (CuZn) nickel-plated			
Weight	0.2			kg
Ambient temperature at $U_B = DC\ 24\ V$	-25	-	+50	°C
Degree of protection according to EN 60529	IP67			
Type of installation	Non-flush			
Connection type	M12 plug connector, 8-pin, axial or radial connection, screw terminal			
Cable length	-	-	50	m
Operating voltage U_B (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_B (without load current)	-	65	100 ¹⁾	mA
Interface/data transfer				
Interface to I/O on a control system	4-bit parallel, binary coded via HIGH/LOW level			
Load current per output I_A (push-pull)	-	-	30	mA
Output voltage U_A	$U_B - 3$ 0	-	U_B 2	V DC
A, B, C, D, STROBE = 1 (HIGH level)				
A, B, C, D, STROBE = 0 (LOW level)				
Input voltage U_E	15 0	-	U_B 2	V DC
SKIP = 1 (HIGH level)				
SKIP = 0 (LOW level)				
Input resistance R_i (SKIP input)	-	4.5	-	kOhm
LED indication	Yellow: Data carrier active ²⁾			

1) Continuous current in operation.

2) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read head.


Read/write head CIT3SX1R1G05KX

- ▶ Serial interface RS232
- ▶ Active face can be adjusted to 5 different positions
- ▶ Standard housing according to EN 50041
- ▶ Connection terminals



Read/write head CIT3SX1R1G05KX

Dimension drawing

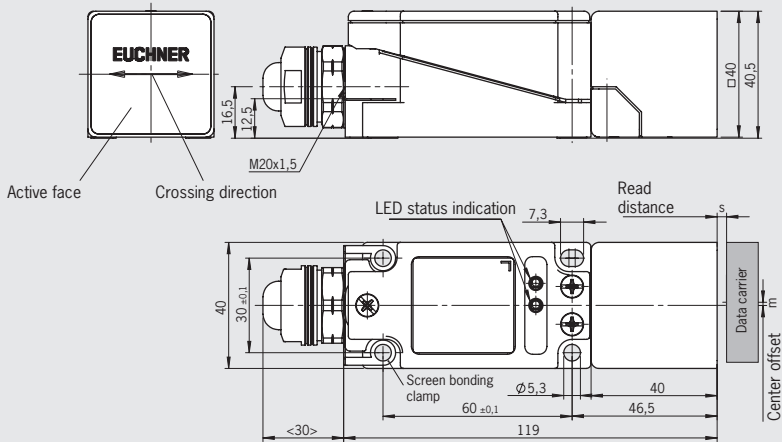

For possible combinations see page 11

Serial interface

The individual commands for reading and writing the data carrier are in accordance with the common 3964R protocol and are described in the EUCHNER CIS3 system manual (order no. 071 652). For data carrier programming away from the system, a convenient WINDOWS®-compatible PC software application is available (Software Transponder Coding, see page 41).

Standard housing

The size of the robust housing in degree of protection IP65 is compliant with the standard EN 50041. The division into 3 assemblies permits easy mounting and straightforward replacement.

Mounting instructions

On mounting the read/write head and data carrier, it is to be ensured the crossing direction as per the direction of the arrow on the active face of the read/write head is observed.


Attention:

On the usage of a screened cable the connection cable for the serial interface is allowed to be max. 5 m long.

Pin assignment

Terminal	Designation	Description
1	24 V/U _B	Power supply, DC 24 V
2	RxD	Serial interface receive
3	0V/GND	Ground, DC 0 V
4	TxD	Serial interface transmit

Changing the active face

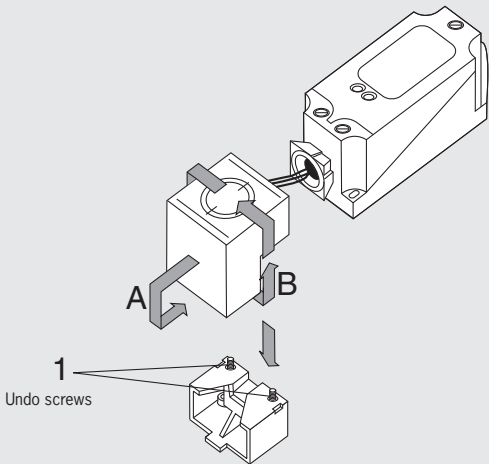

Ordering table

Series	Interface	Connection	Order no. / item
Read/write head for CIS3	Serial RS232	Connection terminals	096 560 CIT3SX1R1G05KX


Technical data read/write head CIT3SX1R1G05KX

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Plastic			
Weight	0.29			kg
Ambient temperature at $U_g = DC\ 24\ V$	0	-	+55	°C
Degree of protection according to EN 60529	IP65			
Type of installation	Non-flush			
Connection type	Screw terminals			
Operating voltage U_g (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_g (without load current)	-	80	120	mA
Interface/data transfer				
Interface to the PC or to the control system	Serial RS232			
Transfer protocol	3964R			
Data transfer rate	-	9.6	-	kbaud
Data format	1 start bit, 8 data bits, 1 parity bit (even parity), 1 stop bit			
Cable length RS232 interface	-	-	5	m
LED indication	Green: Ready (in operation) Yellow: Data carrier active ¹⁾			

1) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read/write head.

Data carrier CIS3P35X16SH16Y...


- ▶ Cube-shaped design 35 x 16 mm
- ▶ Data carrier horizontal or vertical
- ▶ Unprogrammed or programmed



For possible combinations see page 11

Data carrier CIS3P35X16SH16Y...

Dimension drawing

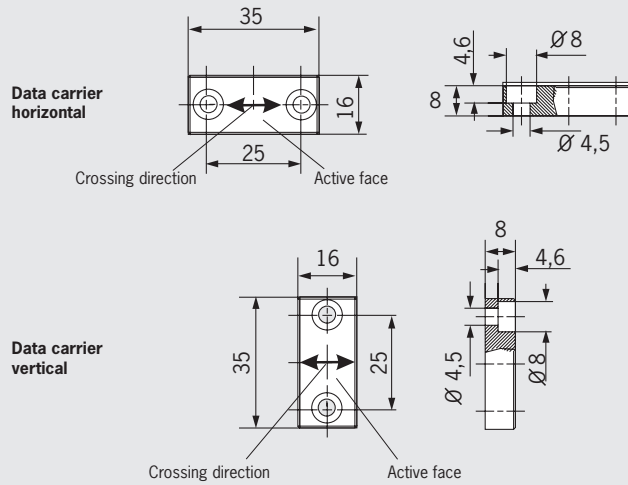

Mounting instructions

On mounting the read head and data carrier, it is to be ensured the crossing direction as per the direction of the arrow on the active face of the read head or read/write head is observed.

Programming

The data carrier can be written (programmed) for read-only operation with a maximum of 32 hexadecimal digits (value from O_{hex} to F_{hex}) on customer request. Standard filler digit after the customer-specific defined digits is E_{hex} .

The housing is permanently laser marked with the digits programmed (not including filler digits) in hexadecimal notation.

Technical data

Parameter	min.	Value typ.	max.	Unit
Memory capacity (read/write)	-	16	-	bytes
Housing material		Plastic PPS		
Weight		0.005		kg
Degree of protection according to EN 60529		IP67		
Ambient temperature	-40	-	+85	°C
Type of installation		Screw fixing, not flush (also on metal)		
Memory organization		Only possible in 2-byte blocks		
Write		Possible byte by byte		
Read				
Operating parameters on reading using read-only head CIT3PL1N30-STA or CIT3PL1N30-STR				
Read distance s_L	0	7	18	mm
Center offset m_L in x direction (for $s_L = 7$ mm)	-	-	± 23	
Center offset m_L in y direction (for $s_L = 7$ mm)	-	-	± 8	
Relative speed for reading 4 hexadecimal digits	-	-	410	mm/s
Reduction for each additional hexadecimal digit (at $s_L = 7$ mm and $m_L = 0$ mm in y direction)	-	-	25	
Number of read cycles		Not limited		
Operating parameters on reading and writing using read/write head CIT3SX1R1G05KX				
Read distance s_L	0	7	18	mm
Write distance s_S	0	5	10	
Center offset m_L/m_S in x direction (at $s_L/s_S = 5$ mm)	-	-	± 10	
Center offset m_L/m_S in y direction (at $s_L/s_S = 5$ mm)	-	-	± 8	
Number of write cycles	100,000	-	-	cycles

Ordering table

Series	Design	Version	Order no. / item
Data carrier for CIS3	Cube-shaped 35 x 16 mm	Horizontal, unprogrammed	084 746 CIS3P35X16SH16YHN0U
		Horizontal, programmed	084 747 CIS3P35X16SH16YHN0P
		Vertical, unprogrammed	095 950 CIS3P35X16SH16YVN0U
		Vertical, programmed	095 951 CIS3P35X16SH16YVN0P

Data carrier CIS3P16D08KH16YSNO...


- Cylindrical design Ø 16 mm
- Unprogrammed or programmed



For possible combinations see page 11

Data carrier CIS3P16D08KH16YSNO...

Dimension drawing

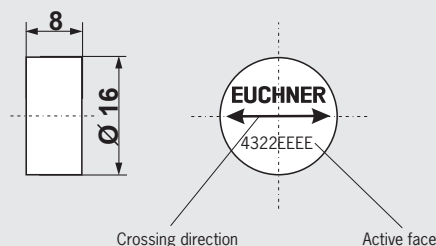

Notes on installation

- On mounting the read head and data carrier, it is to be ensured the crossing direction as per the direction of the arrow on the active face of the read head or read/write head is observed.
- For fastening use e.g. two-component epoxy resin adhesive.

Programming

The data carrier can be written (programmed) for read-only operation with a maximum of 32 hexadecimal digits (value from 0_{hex} to F_{hex}) on customer request. Standard filler digit after the customer-specific defined digits is E_{hex} .

The housing is permanently laser marked with the digits programmed (not including filler digits) in hexadecimal notation.

Technical data

Parameter	min.	Value typ.	max.	Unit
Memory capacity (read/write)	-	16	-	bytes
Housing material	Plastic PPS			
Weight	0.003			kg
Degree of protection according to EN 60529	IP67			
Ambient temperature	-40	-	+85	°C
Type of installation	Bonded, flush (also in metal) ¹⁾			
Memory organization	Only possible in 2-byte blocks Possible byte by byte			
Write				
Read				
Operating parameters on reading using read-only head CIT3PL1N30-STA or CIT3PL1N30-STR ¹⁾				
Read distance s_L	0	5	14	mm
Center offset m_L in x direction (for $s_L = 5$ mm)	-	-	± 18	
Center offset m_L in y direction (for $s_L = 5$ mm)	-	-	± 6	
Relative speed for reading 4 hexadecimal digits	-	-	320	mm/s
Reduction for each additional hexadecimal digit (at $s_L = 5$ mm and $m_L = 0$ mm in y direction)	-	-	25	
Number of read cycles	Not limited			
Operating parameters on reading and writing using read/write head CIT3SX1R1G05KX ¹⁾				
Read distance s_L	0	5	14	mm
Write distance s_S	0	5	9	
Center offset m_L / m_S in x direction (at $s_L / s_S = 5$ mm)	-	-	± 10	
Center offset m_L / m_S in y direction (at $s_L / s_S = 5$ mm)	-	-	± 6	
Number of write cycles	100,000	-	-	cycles

1) On flush installation in a non-metallic material, better operating parameters as for the data carriers CIS3P35X16SH16Y... are obtained

Ordering table


Series	Design	Version	Order no. / item
Data carrier for CIS3	Cylindrical Ø 16 mm	Unprogrammed	088 832 CIS3P16D08KH16YSNOU
		Programmed	088 833 CIS3P16D08KH16YSNOP

Connection cables and documentation

- Screened connection cable for read-only heads CIT3PL.../CIT3APL...

For read-only heads CIT3
M12 socket, 8-pin, silicone-free

Dimension drawing

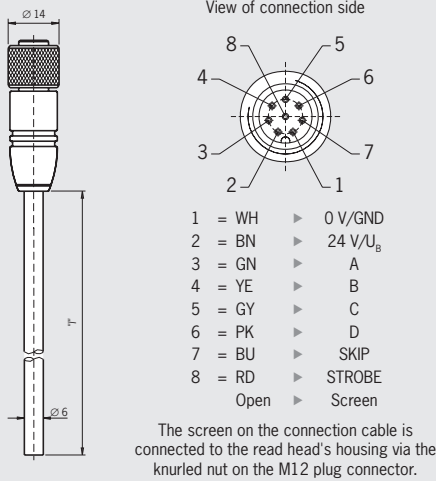

Technical data

Parameter	min.	Value typ.	max.	Unit
Plug connector		8-pin M12 female connector, straight		
Connection type		Screw terminal, knurled nut electrically connected to cable screen		
Conductor cross-section		8 x 0.25 screened		mm ²
Material, outer sheath		PVC		

Ordering table

Plug connectors	Cable type	Cable length l [m]	Order no / item
Straight	V Cable PVC	5	077 751 C-M12F08-08X025PV05,0-ZN-077751
		10	077 752 C-M12F08-08X025PV10,0-ZN-077752
		15	077 753 C-M12F08-08X025PV15,0-ZN-077753
		20	077 871 C-M12F08-08X025PV20,0-ZN-077871
		25	077 872 C-M12F08-08X025PV25,0-ZN-077872
		50	077 873 C-M12F08-08X025PV50,0-ZN-077873

- User manual CIS3/CIS3A

Ordering table

Series	Comment	Order no.
Manual Inductive Identification system CIS3/CIS3A	PDF file as download ¹⁾	071 652


1) Downloads available at www.euchner.de in Download/Manuals/Automation/Identification systems.

Inductive Identification System CIS3A






- ▶ Low-cost read/write system with predominantly used, separate read-only heads
- ▶ Extremely compact head design, no separate interface adapter required
- ▶ Read distance maximum 28 mm
- ▶ Dynamic reading with a relative speed up to 230 mm/s
- ▶ Data carrier memory capacity 16 bytes E²PROM read/write
- ▶ Easy connection of the read-only heads to I/O on any control system via 4-bit parallel interface (24 V)
- ▶ Read/write heads with serial interface RS232

The identification system CIS3A is used if somewhat larger read distances are required. As a result a larger data carrier is necessary.

The data carrier is screwed on the product to be identified. The antenna and the interface electronics are fully integrated in the read heads and the read/write head. The data carrier and the head contain round-shaped antennae. The orientation of the data carrier in relation to the head is unimportant. This fact means that the data carrier can approach the head from any direction. The data carriers can be read when static or moving at low relative speed in front of the read head, i. e. on moving past. The data carrier must always be static for writing.

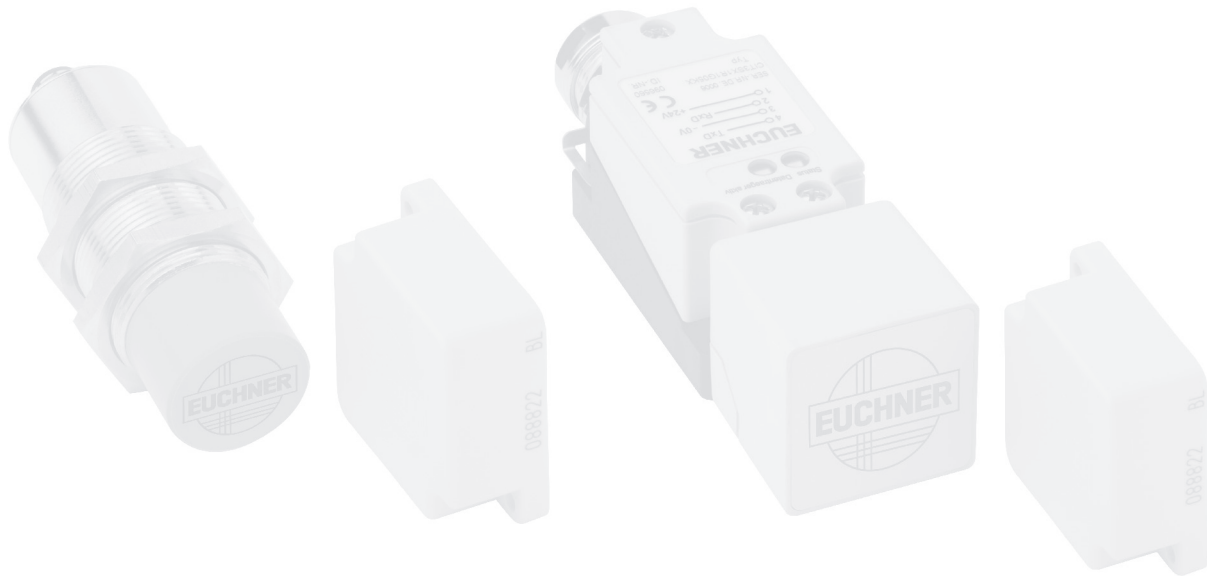

Selection table for identification system CIS3A

	Connection cable	Read/write heads	Data carriers
Read only	 Page 29	Read-only head CIT3APL1N30-STA  Page 22	 CIS3AP50X50SH16YSNO... Page 28
		Read-only head CIT3APL1G05ST  Page 24	
Read / write		Read/write head CIT3ASX1R1G05KX  Page 26	

Possible combinations for CIS3A components

To give you a quick overview of which CIS3A components can be combined with each other, there is a combinations table for each read head. The table will answer the following questions:

- Which data carrier can be read by the selected read head?
- What is the operating distance of this combination?

Key to symbols	L 20	Combination possible, max. read distance 20 mm
	S 28	Combination possible, max. write distance 28 mm
		Combination not permissible

Identification system CIS3A

Read/write heads	Data carriers
	CIS3AP50X50SHYSNO... All items
Read-only head CIT3APL1N30-STA 071 900	L 20
Read-only head CIT3APL1G05ST 077 805	L 28
Read/write head CIT3ASX1R1G05KX 077 890	L 28 S 28

Read-only head CIT3APL1N30-STA

- ▶ Parallel interface
- ▶ Cylindrical design M30
- ▶ M12 plug connector
- ▶ Axial connection




For possible combinations see page 21

Attention:
On the usage of a screened cable the connection cable is allowed to be max. 50 m long.

Read-only head CIT3APL1N30-STA

M12 plug, 8-pin, axial connection


Dimension drawing

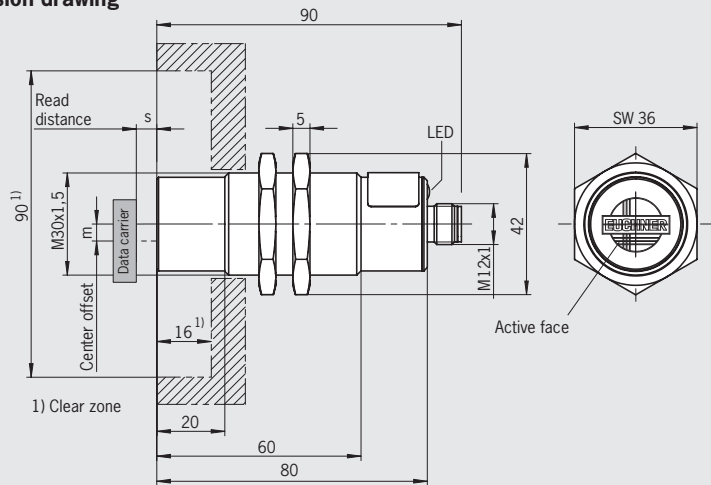

For connection cable see page 29

Pin assignment

Pin	Designation	Description	Wire color
1	0V/GND	Ground, DC 0 V	WH
2	24 V/U _B	Power supply, DC 24 V	BN
3	A	Output data wire A	GN
4	B	Output data wire B	YE
5	C	Output data wire C	GY
6	D	Output data wire D	PK
7	SKIP	Input data clock	BU
8	STROBE	Output data carrier active	RD
-		Screen	Open



View on the connection side of the read head

The screen on the connection cable is connected to the read head's housing via the knurled nut on the M12 plug connector.

Ordering table

Series	Interface	Connection	Order no. / item
Read-only head for CIS3A	Parallel	M12 plug connector axial connection	071 900 CIT3APL1N30-STA

Technical data read-only head CIT3APL1N30-STA

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Brass (CuZn) nickel-plated			
Weight	0.2			kg
Ambient temperature at $U_B = DC\ 24\ V$	-25	-	+50	°C
Degree of protection according to EN 60529	IP67			
Type of installation	Non-flush			
Connection type	M12 plug connector, 8-pin, axial connection, screw terminal			
Cable length	-	-	50	m
Operating voltage U_B (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_B (without load current)	-	65	100 ¹⁾	mA
Interface/data transfer				
Interface to I/O on a control system	4-bit parallel, binary coded via HIGH/LOW level			
Load current per output I_A (push-pull)	-	-	30	mA
Output voltage U_A				
A, B, C, D, STROBE = 1 (HIGH level)	$U_B - 3$	-	U_B	V DC
A, B, C, D, STROBE = 0 (LOW level)	0	-	2	
Input voltage U_E				
SKIP = 1 (HIGH level)	15	-	U_B	V DC
SKIP = 0 (LOW level)	0	-	2	
Input resistance R_i (SKIP input)	-	4.5	-	kOhm
LED indication	Yellow: Data carrier active ²⁾			

1) Continuous current in operation.

2) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read head.

Read-only head CIT3APL1G05ST


- ▶ Parallel interface
- ▶ Active face can be adjusted to 5 different positions
- ▶ Standard housing according to EN 50041
- ▶ M12 plug connector
- ▶ Axial connection



Read-only head CIT3APL1G05ST

M12 plug, 8-pin, axial connection

Dimension drawing

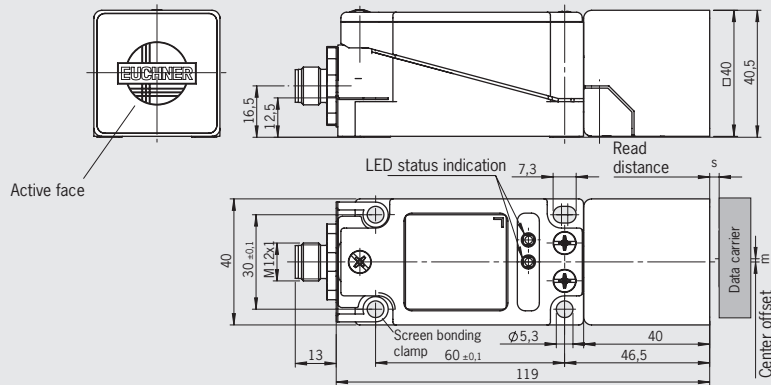


For connection cable see page 29

For possible combinations see page 21

Attention:


On the usage of a screened cable the connection cable is allowed to be max. 50 m long.

Changing the active face

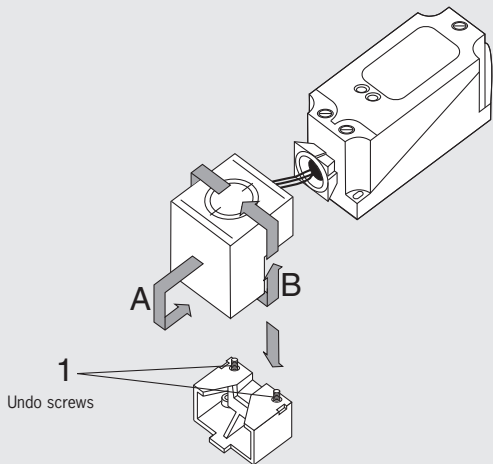

Pin assignment

Pin	Designation	Description	Wire color
1	0V/GND	Ground, DC 0 V	WH
2	24 V/U _B	Power supply, DC 24 V	BN
3	A	Output data wire A	GN
4	B	Output data wire B	YE
5	C	Output data wire C	GY
6	D	Output data wire D	PK
7	SKIP	Input data clock	BU
8	STROBE	Output data carrier active	RD
-		Screen	Open



View on the connection side of the read head

The screen on the connection cable is connected to the read head's screen bonding clamp via the knurled nut on the M12 plug connector.

Ordering table

Series	Interface	Connection	Order no. / item
Read-only head for CIS3A	Parallel	M12 plug connector axial connection	077 805 CIT3APL1G05ST

Technical data read-only head CIT3APL1G05ST

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Plastic			
Weight	0.3			kg
Ambient temperature at $U_B = DC\ 24\ V$	0	-	+50	°C
Degree of protection according to EN 60529	IP65			
Type of installation	Non-flush			
Connection type	M12 plug connector, 8-pin, axial connection, screw terminal			
Cable length	-	-	50	m
Operating voltage U_B (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_B (without load current)	-	90	120 ¹⁾	mA
Interface/data transfer				
Interface to I/O on a control system	4-bit parallel, binary coded via HIGH/LOW level			
Load current per output I_A (push-pull)	-	-	30	mA
Output voltage U_A	$U_B - 3$ 0	-	U_B 2	V DC
A, B, C, D, STROBE = 1 (HIGH level)				
A, B, C, D, STROBE = 0 (LOW level)	0	-	2	
Input voltage U_E	15 0	-	U_B 2	V DC
SKIP = 1 (HIGH level)				
SKIP = 0 (LOW level)	0	-	2	
Input resistance R_i (SKIP input)	-	4.5	-	kOhm
LED indication	Green: Ready (in operation) Yellow: Data carrier active ²⁾			

1) Continuous current in operation.

2) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read head.

Read/write head CIT3ASX1R1G05KX

- ▶ Serial interface RS232
- ▶ Active face can be adjusted to 5 different positions
- ▶ Standard housing according to EN 50041
- ▶ Connection terminals



For possible combinations see page 21

Serial interface

The individual commands for reading and writing the data carrier are in accordance with the common 3964R protocol and are described in the EUCHNER CIS3 system manual (order no. 071 652). For data carrier programming away from the system, a convenient WINDOWS®-compatible PC software application is available (Software Transponder Coding, see page 41).

Standard housing


The size of the robust housing in degree of protection IP65 is compliant with the standard EN 50041. The division into 3 assemblies permits easy mounting and straightforward replacement.

Attention:

On the usage of a screened cable the connection cable for the serial interface is allowed to be max. 5 m long.

Read/write head CIT3ASX1R1G05KX


Dimension drawing

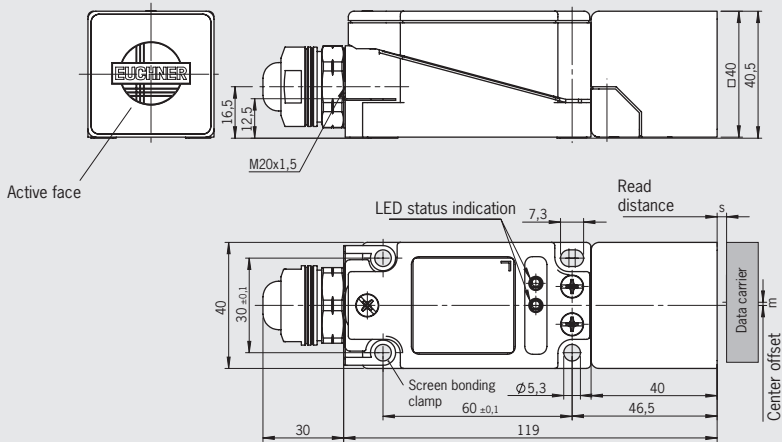

Pin assignment

Terminal	Designation	Description
1	24 V/U _B	Power supply, DC 24 V
2	RxD	Serial interface receive
3	0V/GND	Ground, DC 0 V
4	TxD	Serial interface transmit

Changing the active face

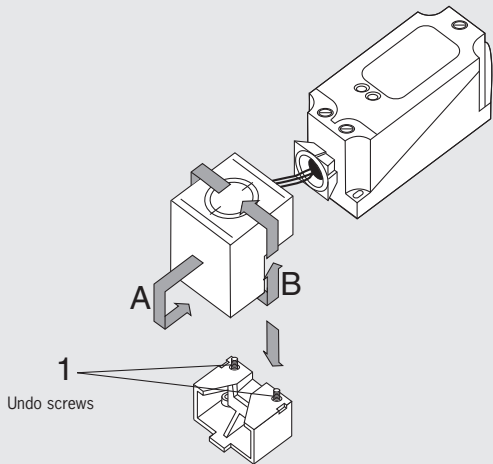

Ordering table

Series	Interface	Connection	Order no. / item
Read/write head for CIS3A	Serial RS232	Connection terminals	077 890 CIT3ASX1R1G05KX

Technical data read/write head CIT3ASX1R1G05KX

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Plastic			
Weight	0.29			kg
Ambient temperature at $U_g = DC\ 24\ V$	0	-	+55	°C
Degree of protection according to EN 60529	IP65			
Type of installation	Non-flush			
Connection type	Screw terminals			
Operating voltage U_g (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_g (without load current)	-	80	120	mA
Interface/data transfer				
Interface to the PC or to the control system	Serial RS232			
Transfer protocol	3964R			
Data transfer rate	-	9.6	-	kbaud
Data format	1 start bit, 8 data bits, 1 parity bit (even parity), 1 stop bit			
Cable length RS232 interface	-	-	5	m
LED indication	Green: Ready (in operation) Yellow: Data carrier active ¹⁾			

1) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read/write head.

Data carrier CIS3AP50X50SH16YSNO...


- ▶ Square design 50 x 50 mm
- ▶ Unprogrammed or programmed



For possible combinations see page 21

Data carrier CIS3AP50X50SH...

Dimension drawing

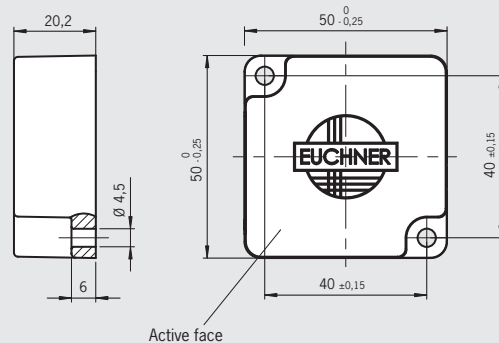

Programming

The data carrier can be written (programmed) for read-only operation with a maximum of 32 hexadecimal digits (value from O_{hex} to F_{hex}) on customer request. Standard filler digit after the customer-specific defined digits is E_{hex} .

The housing is permanently laser marked with the digits programmed (not including filler digits) in hexadecimal notation.

Technical data

Parameter	min.	Value typ.	max.	Unit
Memory capacity (read/write)	-	16	-	bytes
Housing material	Plastic PPS			
Weight	0.07			kg
Degree of protection according to EN 60529	IP67			
Ambient temperature	-20	-	+85	°C
Type of installation	Screw fixing, not flush (also on metal)			
Memory organization	Only possible in 2-byte blocks Possible byte by byte			
Write				
Read				
Operating parameters on reading using read-only head CIT3APL1N30-STA				
Read distance s_L	7 ¹⁾	12	20	mm
Center offset m_L (for $s_L = 12$ mm)	-	-	± 11	
Relative speed for reading 4 hexadecimal digits	-	-	200	mm/s
Reduction for each additional hexadecimal digit (at $s_L = 12$ mm and $m_L = 0$ mm)	-	-	25	
Number of read cycles	Not limited			
Operating parameters on reading using read-only head CIT3APL1G05-STA				
Read distance s_L	14 ¹⁾	20	28	mm
Center offset m_L (for $s_L = 20$ mm)	-	-	± 13	
Relative speed for reading 4 hexadecimal digits	-	-	230	mm/s
Reduction for each additional hexadecimal digit (at $s_L = 20$ mm and $m_L = 0$ mm)	-	-	25	
Number of read cycles	Not limited			
Operating parameters on reading and writing using read/write head CIT3ASX1R1G05KX				
Read distance s_L and write distance s_S	0	20	28	mm
Center offset m_L / m_S (at $s_L / s_S = 20$ mm)	-	-	± 13	
Number of write cycles	100,000	-	-	cycles

1) It is necessary to maintain the minimum distance on the approach of the data carrier from the side if the data must be transferred correctly to the read head in one transmission.

Ordering table


Series	Design	Version	Order no. / item
Data carrier for CIS3A	Square 50 x 50 mm	Unprogrammed	088 822 CIS3AP50X50SH16YSNOU
		Programmed	088 823 CIS3AP50X50SH16YSNOP

Connection cables and documentation

- Screened connection cable for read-only heads CIT3PL.../CIT3APL...

For read-only heads CIT3
M12 socket, 8-pin, silicone-free

Dimension drawing

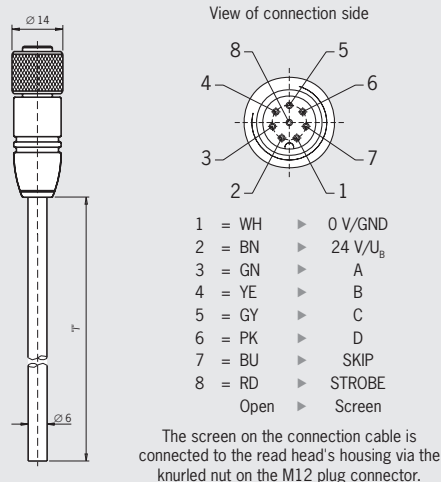

Technical data

Parameter	min.	Value typ.	max.	Unit
Plug connector		8-pin M12 female connector, straight		
Connection type		Screw terminal, knurled nut electrically connected to cable screen		
Conductor cross-section		8 x 0.25 screened		mm ²
Material, outer sheath		PVC		

Ordering table

Plug connectors	Cable type	Cable length l [m]	Order no / item
Straight	V Cable PVC	5	077 751 C-M12F08-08X025PV05,0-ZN-077751
		10	077 752 C-M12F08-08X025PV10,0-ZN-077752
		15	077 753 C-M12F08-08X025PV15,0-ZN-077753
		20	077 871 C-M12F08-08X025PV20,0-ZN-077871
		25	077 872 C-M12F08-08X025PV25,0-ZN-077872
		50	077 873 C-M12F08-08X025PV50,0-ZN-077873

- User manual CIS3/CIS3A

Ordering table

Series	Comment	Order no.
Manual Inductive Identification System CIS3/CIS3A	PDF file as download ¹⁾	071 652

1) Downloads available at www.euchner.de in Download/Manuals/Automation/Identification systems.

Inductive Identification System CIS3A-Mini

- ▶ One of the smallest plug-in read heads
- ▶ Interface adapter for fitting on the DIN rail in the control cabinet
- ▶ Miniature data carrier, diameter 10 x 4 mm
- ▶ Read distance maximum 6.5 mm (static, on installation in non-metallic material)
- ▶ Data carrier memory capacity 116 bytes E²PROM read/write
- ▶ Easy connection of the read-only adapter to I/O on any control system via 4-bit parallel interface (24 V), max. 4 bytes of the data carrier usable via parallel interface
- ▶ Read/write interface adapter with serial interface RS232 or RS422, complete memory of 116 bytes usable via serial interface

The innovative identification system CIS3A-Mini is used if there is very little space to fit a data carrier to the product to be identified, or if there is very little space available for the read head.


Incredibly small dimensions characterize the CIS3A-Mini where the read/write head and data carrier are concerned. Typical applications are for example tool identification or modern, very complex compact assembly installations with small product carriers. The round data carriers are bonded in a countersunk hole. Due to the high quality design of the data carrier with ferrite core, a relatively large read distance is even achieved on installation in metal, despite the small antenna. The antenna and the interface electronics are located in separate housings and are connected via a special connection cable. The data carrier and the head contain round-shaped antennae. The orientation of the data carrier in relation to the head is unimportant. This fact means that the data carrier can approach the head from any direction. The data carrier can only be read or written if it is static in front of the read head.

The following components are necessary for the operation of a read station:






- ▶ Read head
- ▶ Read-only interface adapter
- ▶ Connection cable for connection of read head to interface adapter

The following components are necessary for the operation of a read/write station:

- ▶ Read head (here with read/write functionality)
- ▶ Read/write interface adapter
- ▶ Connection cable for connection of read head to interface adapter

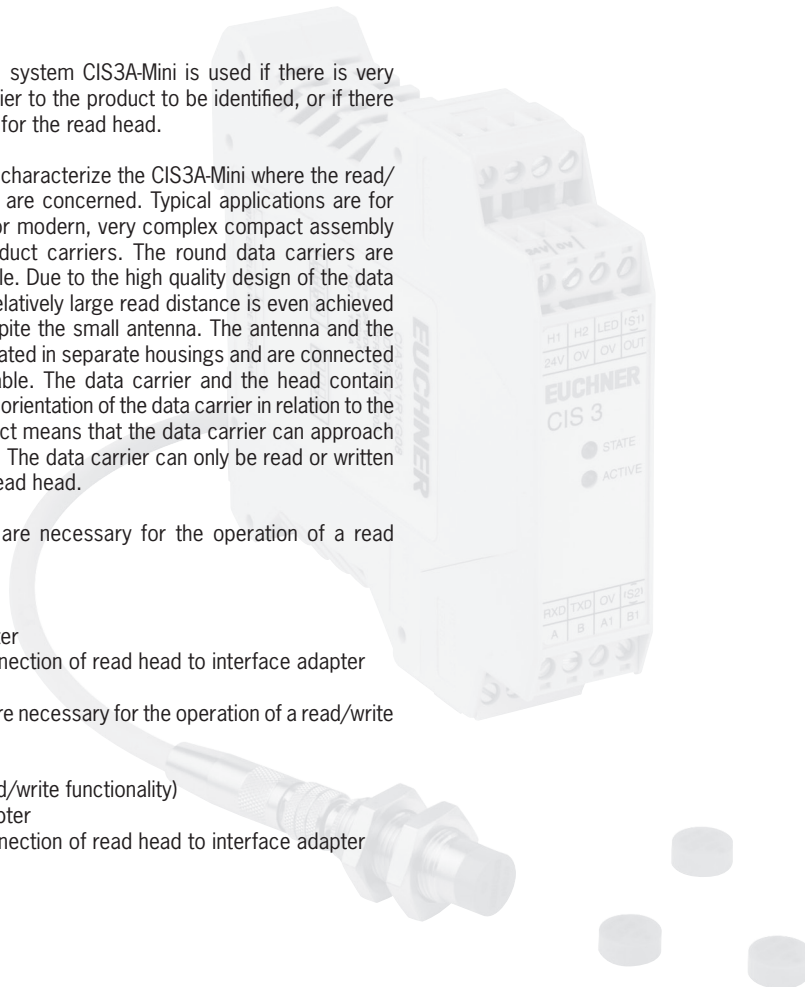

Selection table for identification system CIS3A-Mini

Interface adapter		Connection cable	Read/write head	Data carrier
Read only	Parallel interface CIA3PLG08  Page 34	 Page 40	Read/write head CIT3ASX1N12ST  Page 38	CIS3AP10D05KH01K...  Page 39
	Serial interface CIA3SX1R1G08  Page 36			

Possible combinations for CIS3A-Mini components

To give you a quick overview of which CIS3A-Mini components can be combined with each other, there is a combinations table for each read head. The table will answer the following questions:

- Which data carrier can be read by the selected read head?
- What is the operating distance of this combination?

Key to symbols	L 6.5	Combination possible, max. read distance 6.5 mm
	S 6	Combination possible, max. write distance 6 mm
		Combination not permissible

Identification system CIS3A-Mini

Read/write station	Data carriers
	CIS3AP10D05KH01K... All items
Interface adapter CIA3... All items with read/write head CIT3ASX1N12ST 077 940	L 6.5 S 6


Read-only interface adapter CIA3PL1G08

- ▶ Parallel interface
- ▶ In combination with read head CIT3ASX1N12ST
- ▶ DIN rail mounting



Interface adapter CIA3PL1G08

Dimension drawing

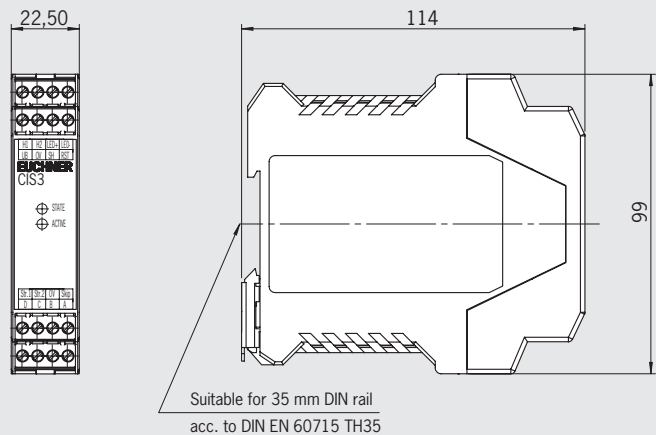

For possible combinations see page 33

Attention:

- ▶ The connection cable to the control system is allowed to be max. 15 m long.
- ▶ On the usage of a screened cable the connection cable to the read head is allowed to be max. 15 m long.
- ▶ It is only ever possible to connect 1 read head per interface adapter.

Pin assignment power supply and interface

Designation	Description
0V/GND	Ground, DC 0 V
24 V/U _B	Power supply, DC 24 V
A	Output data wire A
B	Output data wire B
C	Output data wire C
D	Output data wire D
SKIP	Input data clock
STROBE 1	Output data carrier active
RST	Input RESET

Pin assignment read head

Designation	Description	Wire color
H1	Read head antenna	BN
H2	Read head antenna	WH
LED +	Read head LED	YE
LED -	Read head LED	GN
SH	Read head screen	BK

Ordering table

Series	Interface	Order no. / item
Read-only adapter for CIS3A-Mini	Parallel	091 875 CIA3PL1G08

Technical data read-only interface adapter CIA3PL1G08

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Plastic			
Weight	0.12			kg
Ambient temperature at $U_B = DC\ 24\ V$	0	-	+55	°C
Degree of protection according to EN 60529	IP20			
Mounting	35 mm DIN rail acc. to DIN EN 60715 TH35			
Connection type	Plug-in screw terminals			
Cable length to control system	-	-	15	m
Cable length to read head	-	-	15	
Operating voltage U_B (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_B (without load current)	-	65	100 ¹⁾	mA
Interface/data transfer				
Interface to I/O on a control system	4-bit parallel, binary coded via HIGH/LOW level			
Load current per output I_A (push-pull)	-	-	30	mA
Output voltage U_A				
A, B, C, D, STROBE = 1 (HIGH level)	$U_B - 3$	-	U_B	V DC
A, B, C, D, STROBE = 0 (LOW level)	0	-	2	
Input voltage U_E				
SKIP = 1 (HIGH level)	15	-	U_B	V DC
SKIP = 0 (LOW level)	0	-	2	
Input resistance R_i (RESET input and SKIP input)	-	4.5	-	kOhm
LED indication	Green: Ready (in operation) Yellow: Data carrier active ²⁾			

1) Continuous current in operation.

2) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read head.


Read/write interface adapter CIA3SX1R1G08

- Serial interface RS232/RS422
- In combination with read head CIT3ASX1N12ST
- DIN rail mounting



Interface adapter CIA3SX1R1G08

Dimension drawing

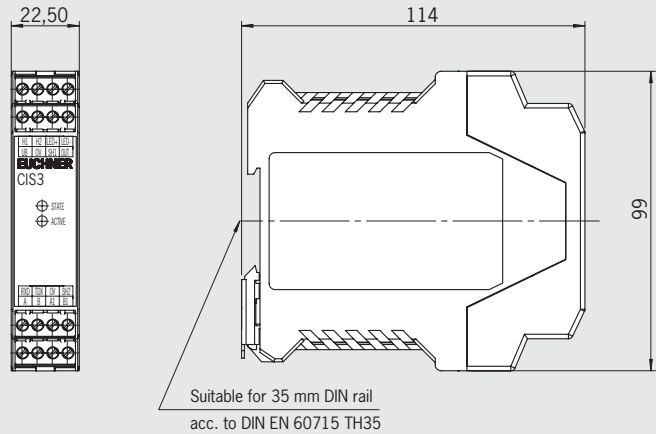

For possible combinations see page 33

Serial interface

The individual commands for reading and writing the data carrier are in accordance with the common 3964R protocol and are described in the EUCHNER CIS3 system manual (order no. 084 727). For data carrier programming away from the system, a convenient WINDOWS®-compatible PC software application is available (Software Transponder Coding, see page 41).

Attention:

- On the usage of a screened cable the connection cable for the serial interface is allowed to be max. 5 m long for RS232 and max. 1000 m long for RS422.
- On the usage of a screened cable the connection cable to the read/write head is allowed to be max. 15 m long.
- It is only ever possible to connect 1 read head per interface adapter.

Pin assignment

Designation	Description
0V/GND	Ground, DC 0 V
24 V/U _B	Power supply, DC 24 V
TxD	Serial interface transmit
RxD	Serial interface receive
A/TxD+	Serial interface transmit +
B/TxD-	Serial interface transmit -
A1/RxD+	Serial interface receive +
B1/RxD-	Serial interface receive -
OUT	Output data carrier active, 24 V
SH2	Screen data wire

Pin assignment read head

Designation	Description	Wire color
H1	Read head antenna	BN
H2	Read head antenna	WH
LED +	Read head LED	YE
LED -	Read head LED	GN
SH1	Read head screen	BK

Ordering table

Series	Interface	Order no. / item
Read/write interface adapter for CIS3A-Mini	Serial RS232 / RS422	077 910 CIA3SX1R1G08

Technical data read/write interface adapter CIA3SX1R1G08

Parameter	Value			Unit
	min.	typ.	max.	
Housing material	Plastic			
Weight	0.12			kg
Ambient temperature at $U_g = DC\ 24\ V$	0	-	+55	°C
Degree of protection according to EN 60529	IP20			
Mounting	35 mm DIN rail acc. to DIN EN 60715 TH35			
Connection type	Plug-in screw terminals			
Operating voltage U_g (regulated, residual ripple < 5 %)	20	24	28	V DC
Current consumption I_g (without load current)	-	65	100	mA
Interface/data transfer				
Interface to the PC or to the control system	Serial RS232 / RS422 (can be changed using rotary switch)			
Transfer protocol	3964R			
Data transfer rate (selectable with DIP switch)	9.6	-	28.8	kbaud
Data format	1 start bit, 8 data bits, 1 parity bit (even parity), 1 stop bit			
Cable length RS232 interface	-	-	5	m
Cable length RS422 interface	-	-	1000	
LED indication	Green: Ready (in operation) Yellow: Data carrier active ¹⁾			

1) The LED illuminates yellow if there is a functional data carrier in the operating distance in front of the read/write head.

Read/write head CIT3ASX1N12ST

- Use with interface adapter CIA3...
- Cylindrical design M12
- M8 plug connector
- Axial connection



For possible combinations see page 33

Note

The read head CIT3ASX1N12ST has

- Read-only functionality in combination with the read-only interface adapter with parallel interface
- Read/write functionality in combination with the read/write interface adapter with serial interface


Attention:

On the usage of a screened cable the connection cable to the interface adapter is allowed to be max. 15 m long.


Read/write head CIT3ASX1N12ST

M8 plug, 4-pin, axial connection

Dimension drawing

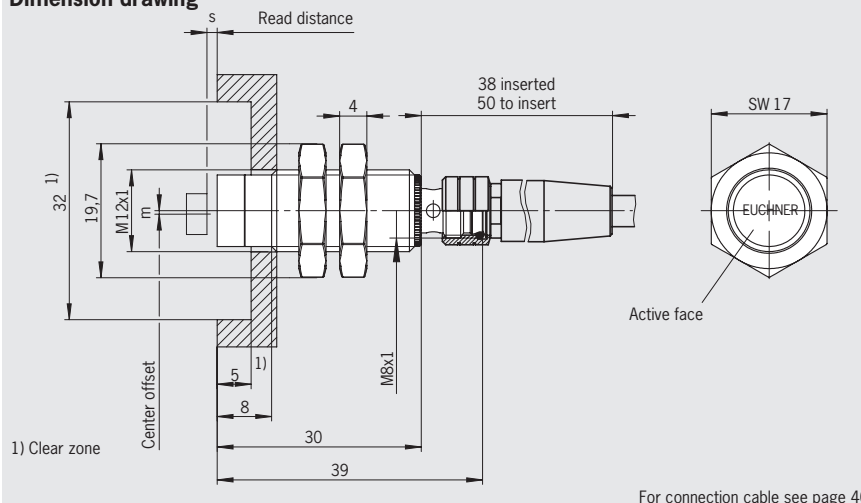

Pin assignment



View on the connection side of the read head

The screen on the connection cable is connected to the read/write head's housing via the knurled nut on the M8 plug connector.

Pin	Designation	Description	Wire color
1	H1	Antenna H1	BN
2	LED +	LED connection +	YE
3	H2	Antenna H2	WH
4	LED -	LED connection -	GN
-		Screen	BK

Technical data

Parameter	min.	Value typ.	max.	Unit
Housing material		Brass (CuZn) nickel-plated		
Weight		0.02		kg
Degree of protection according to EN 60529		IP65		
Ambient temperature	-25	-	+50	°C
Type of installation		Non-flush		

Ordering table

Series	Use	Connection	Order no. / item
Read/write head for CIS3A-Mini	With interface adapter CIA3	M8 plug connector axial connection	077 940 CIT3ASX1N12ST


Data carrier CIS3AP10D05KH01K...

- ▶ Cylindrical design Ø 10 mm
- ▶ Unprogrammed or programmed



Data carrier CIS3AP10D05KH01K...

Dimension drawing

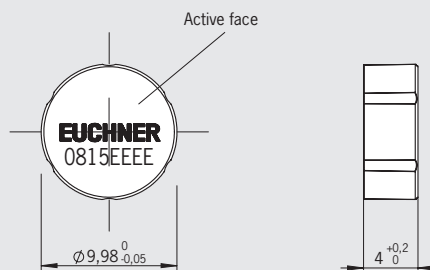

For possible combinations see page 33

Mounting instructions

For fastening use e.g. two-component epoxy resin adhesive.

Programming

The data carrier can be written (programmed) for read-only operation with a maximum of 8 hexadecimal digits (value from 0_{hex} to F_{hex}) on customer request. Standard filler digit after the customer-specific defined digits is E_{hex} .

The housing is permanently laser marked with the digits programmed (not including filler digits) in hexadecimal notation.

Technical data

Parameter	min.	Value typ.	max.	Unit
Memory capacity (read/write)	-	116	-	bytes
Housing material	Plastic PPS			
Weight	0.001			kg
Degree of protection according to EN 60529	IP67			
Ambient temperature	-25	-	+70	°C
Type of installation	Bonded, flush (also in metal)			
Memory organization	Only possible in 4-byte blocks Possible byte by byte			
Write				
Read				
Operating parameters on reading using read/write head CIT3ASX1N12ST and interface adapter CIA3PL1G08 or CIA3SX1R1G08				
Read distance s_L for non-metallic environment	0	3	6.5	mm
Read distance s_L on flush installation in iron	0	3	6	
Read distance s_L on flush installation in aluminum	0	3	5	
Center offset m_L (for $s_L = 3$ mm)	-	-	± 2.5	
Number of read cycles	Not limited			
Operating parameters on writing using read/write head CIT3ASX1N12ST and interface adapter CIA3SX1R1G08				
Write distance s_S for non-metallic environment	0	3	6	mm
Write distance s_S on flush installation in iron	0	3	5.5	
Write distance s_S on flush installation in aluminum	0	3	4.5	
Center offset m_S (for $s_S = 3$ mm)	-	-	± 2	
Number of write cycles	100,000	-	-	cycles

Ordering table


Series	Design	Version	Order no. / item
Data carrier for CIS3A-Mini	Cylindrical Ø 10 mm	Unprogrammed	077 785 CIS3AP10D05KH01K
		Programmed	092 320 CIS3AP10D05KH01K-P

Connection cables and documentation

- Screened connection cable for read/write head CIT3ASX1N12ST

For read/write head CIT3ASX1N12ST
M8 socket, 4-pin

Dimension drawing

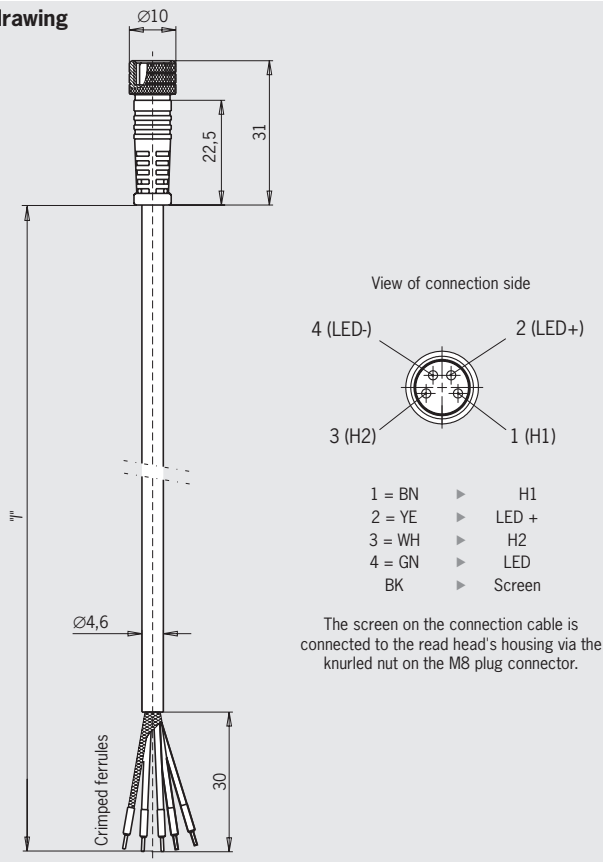

Technical data

Parameter	min.	Value typ.	max.	Unit
Plug connectors		4-pin M8 female plug, straight		
Connection type		Screw terminal, knurled nut electrically connected to cable screen		
Conductor cross-section		4 x 0.25 screened		mm ²
Material, outer sheath		PVC		

Ordering table

Plug connectors	Cable type	Cable length l [m]	Order no / item
Straight	V Cable PVC	2	084 641 C-M08F04-04X025PV02,0-ES-084641
		5	084 642 C-M08F04-04X025PV05,0-ES-084642
		10	084 643 C-M08F04-04X025PV10,0-ES-084643
		15	084 644 C-M08F04-04X025PV15,0-ES-084644

- User manual CIS3A-Mini

Ordering table

Series	Comment	Order no.
Manual Inductive Identification System CIS3A-Mini	PDF file as download ¹⁾	084 727

1) Downloads available at www.euchner.de in Download/Manuals/Automation/Identification systems.

Transponder Coding (TC)

- Software for writing the data carriers
- In conjunction with read/write stations with serial RS232 interface

Description

The Transponder Coding (TC) software is an ASCII/hex editor that can be used to read and write the data carrier on the PC. The software is used in conjunction with a read/write station with serial interface.


Overview

- Display of the data in ASCII and in hex notation
- Byte-wise editing of the data
- Storage of the data as ASCII or hex file on PC

System requirements

- Operating system: Microsoft Windows® 98/ME/NT/2000/XP/Vista/7
- Processor: from Pentium 2
- Available memory: min. 64 MB
- Hard disk space for the installation: approx. 20 MB
- Interface: serial

Transponder Coding (TC)

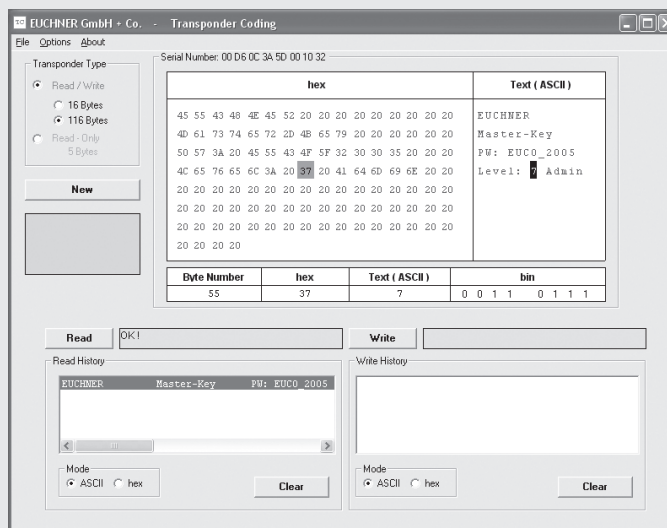

Ordering table

Designation	Comment	Order no. / item
Software Transponder Coding	On CD	067 190

Mobile Hand-Held Terminal MHT-G2

The mobile hand-held terminal MHT-G2 supplements the identification systems CIS. It makes it possible to read from and write to data carriers independent of location. The basic unit is based on the hand-held computer PSION WORKABOUT PRO with the operating system Windows® Embedded CE. The device is powered using a rechargeable lithium-ion battery. The battery in the Basic unit is charged using a docking station. The docking station can also be used for data transfer between the basic unit and a PC via a USB port. An SD memory card is inserted in the basic unit, which contains the software Transponder Coding CE (TCCE) for writing (programming) and reading the data carriers. A read/write head to suit the data carrier is fitted to the basic unit. To achieve even more flexibility in use, the read/write head can be connected to the hand-held terminal via an optionally available coiled cable. The robust, splash-proof design (IP54) guarantees correct function even in difficult conditions in a harsh, industrial environment.

The following components are necessary for the operation of a mobile hand-held terminal:

- ▶ Basic unit
- ▶ Rechargeable battery
- ▶ Docking station
- ▶ SD memory card with Transponder Coding CE (TCCE)
- ▶ CIS3, CIS3A or CIS3A-Mini read/write head
- ▶ Coiled extension cable (optional)



Mobile hand-held terminal basic unit ~~MHT-G2-BU~~ 

- ▶ Reading, writing and editing EUCHNER CIS3, CIS3A and CIS3A-Mini data carriers
- ▶ With operating system Microsoft Windows® Embedded CE

Mobile hand-held terminal MHT-G2-BU



Technical data

Parameter	Value			Unit
	min.	typ.	max.	
Basic unit MHT-G2-BU for the connection of 1 read/write head (via TTL port)				
Read/write head used	To suit the data carrier used			
Screen	Color, touch-sensitive			
Housing material	Plastic			
Degree of protection according to EN 60529	IP54			
Dimensions	Approx. 222 x 76 x 31			mm
Weight (incl. rechargeable battery and read/write head)	Approx. 0.68			kg
Ambient temperature	-20	-	50	
Operating voltage U _B (via lithium-ion rechargeable battery)	-	3.7	-	V DC
Docking station MHT-G2-DS for a basic unit MHT-G2-BU				
Housing material	Plastic			
Power supply unit for docking station with plug adapter for the countries EU, GB, USA, AUS				
Operating voltage (primary, 50 ... 60 Hz)	100	-	240	V AC

Windows® is a registered trademark of Microsoft Corporation

Ordering guide mobile hand-held terminal MHT-G2

Overview	Item	Designation	Order no. / item
	1a	Mobile hand-held terminal basic unit	 099 975 MHT-G2-BU
	1b	Touch pen	
	1c	Cover for rechargeable battery compartment	
	2	Rechargeable battery	099 981 MHT-G2-BA
	3	SD memory card with software Transponder Coding CE (TCCE)	099 982 MHT-G2-SD-TCCE
	4a	Docking station for recharge and for PC communication via USB	099 976 MHT-G2-DS
	4b	Power supply unit for docking station	
	4c	USB cable for the connection of the docking station to a PC	
	5	Extension cable for read/write head	071 759
	6	Read/write head depending on configuration: For identification system CIS3 For identification system CIS3A For identification system CIS3A-Mini	071 755 CIT3-H2 071 778 CIT3A-H2 077 970 CIT3A-MINH2
Manual Mobile hand-held terminal MHT	-	PDF file as download ¹⁾	103 702

1) Downloads available at www.euchner.de in Download/Manuals/Automation/Identification systems.

Index by item designation

Item	Order no.	Page
CIA3PL1G08	091 875	34
CIA3SX1R1G08	077 910	36
CIS3AP10D05KH01K	077 785	39
CIS3AP10D05KH01K-P	092 320	39
CIS3AP50X50SH16YSNOP	088 823	28
CIS3AP50X50SH16YSNOU	088 822	28
CIS3P16D08KH16YSNOP	088 833	17
CIS3P16D08KH16YSNOU	088 832	17
CIS3P35X16SH16YHNOP	084 747	16
CIS3P35X16SH16YHNOU	084 746	16
CIS3P35X16SH16YVNOP	095 951	16
CIS3P35X16SH16YVNOU	095 950	16
CIT3A-H2	071 778	45
CIT3A-MINI-H2	077 970	45
CIT3APL1G05ST	077 805	24
CIT3APL1N30-STA	071 900	22
CIT3ASX1N12ST	077 940	38
CIT3ASX1R1G05KX	077 890	26
CIT3-H2	071 755	45
CIT3PL1N30-STA	071 552	12
CIT3PL1N30-STR	071 950	12
CIT3SX1R1G05KX	096 560	14
C-M08F04-04X025PV02,0-ES-084641	084 641	40
C-M08F04-04X025PV05,0-ES-084642	084 642	40
C-M08F04-04X025PV10,0-ES-084643	084 643	40
C-M08F04-04X025PV15,0-ES-084644	084 644	40
C-M12F08-08X025PV05,0-ZN-077751	077 751	18/29
C-M12F08-08X025PV10,0-ZN-077752	077 752	18/29
C-M12F08-08X025PV15,0-ZN-077753	077 753	18/29
C-M12F08-08X025PV20,0-ZN-077871	077 871	18/29
C-M12F08-08X025PV25,0-ZN-077872	077 872	18/29
C-M12F08-08X025PV50,0-ZN-077873	077 873	18/29
Extension cable for read/write head	071 759	45
Manual inductive identification system CIS3/CIS3A	071 652	18/29
Manual inductive identification system CIS3A-Mini	084 727	40
Manual mobile hand-held terminal MHT	103 702	45
MHT-G2-BA	099 981	45
MHT-G2-BU	099 975	45
MHT-G2-DS	099 976	45
MHT-G2-SD-TCCE	099 982	45
Transponder Coding software	067 190	41

Index by order numbers

Order no.	Item	Page
067 190	Transponder Coding software	41
071 552	CIT3PL1N30-STA	12
071 652	Manual inductive identification system CIS3/CIS3A	18/29
071 755	CIT3-H2	45
071 759	Extension cable for read/write head	45
071 778	CIT3A-H2	45
071 900	CIT3APL1N30-STA	22
071 950	CIT3PL1N30-STR	12
077 751	C-M12F08-08X025PV05,0-ZN-077751	18/29
077 752	C-M12F08-08X025PV10,0-ZN-077752	18/29
077 753	C-M12F08-08X025PV15,0-ZN-077753	18/29
077 785	CIS3AP10D05KH01K	39
077 805	CIT3APL1G05ST	24
077 871	C-M12F08-08X025PV20,0-ZN-077871	18/29
077 872	C-M12F08-08X025PV25,0-ZN-077872	18/29
077 873	C-M12F08-08X025PV50,0-ZN-077873	18/29
077 890	CIT3ASX1R1G05KX	26
077 910	CIA3SX1R1G08	36
077 940	CIT3ASX1N12ST	38
077 970	CIT3A-MINI-H2	45
084 641	C-M08F04-04X025PV02,0-ES-084641	40
084 642	C-M08F04-04X025PV05,0-ES-084642	40
084 643	C-M08F04-04X025PV10,0-ES-084643	40
084 644	C-M08F04-04X025PV15,0-ES-084644	40
084 727	Manual inductive identification system CIS3A-Mini	40
084 746	CIS3P35X16SH16YHNOU	16
084 747	CIS3P35X16SH16YHNOP	16
088 822	CIS3AP50X50SH16YSNOU	28
088 823	CIS3AP50X50SH16YSNOP	28
088 832	CIS3P16D08KH16YSNOU	17
088 833	CIS3P16D08KH16YSNOP	17
091 875	CIA3PL1G08	34
092 320	CIS3AP10D05KH01K-P	39
095 950	CIS3P35X16SH16YVNOU	16
095 951	CIS3P35X16SH16YVNOP	16
096 560	CIT3SX1R1G05KX	14
099 975	MHT-G2-BU	45
099 976	MHT-G2-DS	45
099 981	MHT-G2-BA	45
099 982	MHT-G2-SD-TCCE	45
103 702	Manual mobile hand-held terminal MHT	45

Representatives

International

Australia

Micromax Sensors & Automation
Unit 2, 106-110 Beaconsfield Street
Silverwater, NSW 2128
Tel. +61 2 87482800
Fax +61 2 96482345
info@micromaxsa.com.au

Austria

EUCHNER GmbH
Süddruckgasse 4
2512 Tribuswinkel
Tel. +43 2252 42191
Fax +43 2252 45225
info@euchner.at

Benelux

EUCHNER (BENELUX) BV
Visschersbuurt 23
3356 AE Papendrecht
Tel. +31 78 615-4766
Fax +31 78 615-4311
info@euchner.nl

Brazil

EUCHNER Ltda
Av. Prof. Luiz Ignácio Anhaia Mello,
no. 4387
S. Lucas
São Paulo - SP - Brasil
CEP 03295-000
Tel. +55 11 29182200
Fax +55 11 23010613
euchner@euchner.com.br

Canada

IAC & Associates Inc.
2180 Fasan Drive
Unit A
Oldcastle, Ontario
NOR 1L0
Tel. +1 519 737-0311
Fax +1 519 737-0314
sales@iacnassociates.com

China

EUCHNER (Shanghai)
Trading Co., Ltd.
No. 8 Workshop A, Hi-Tech Zone
503 Meinengda Road Songjiang
201613 Shanghai
Tel. +86 21 5774-7090
Fax +86 21 5774-7599
info@euchner.com.cn

Czech Republic

EUCHNER electric s.r.o.
Videňská 134/102
61900 Brno
Tel. +420 533 443-150
Fax +420 533 443-153
info@euchner.cz

Denmark

Duelco A/S
Systemvej 8
9200 Aalborg SV
Tel. +45 7010 1007
Fax +45 7010 1008
info@duelco.dk

Finland

Sähkölehto Oy
Holkkitie 14
00880 Helsinki
Tel. +358 9 7746420
Fax +358 9 7591071
office@sahkolehto.fi

France

EUCHNER France S.A.R.L.
Parc d'Affaires des Bellevues
Allée Rosa Luxembourg
Bâtiment le Colorado
95610 ERAGNY sur OISE
Tel. +33 1 3909-9090
Fax +33 1 3909-9099
info@euchner.fr

Hong Kong

Imperial
Engineers & Equipment Co. Ltd.
Unit B 12/F
Cheung Lee Industrial Building
9 Cheung Lee Street Chai Wan
Hong Kong
Tel. +852 2889 0292
Fax +852 2889 1814
info@imperial-elec.com

Hungary

EUCHNER Ges.m.bH
Magyarországi Fióktelep
2045 Törökbálint
FSD Park 2.
Tel. +36 2342 8374
Fax +36 2342 8375
info@euchner.hu

India

EUCHNER (India) Pvt. Ltd.
401, Bremen Business Center,
City Survey No. 2562,
University Road
Aundh, Pune - 411007
Tel. +91 20 64016384
Fax +91 20 25885148
info@euchner.in

Israel

Ilan & Gavish Automation Service Ltd.
26 Shenkar St. Qiryat Arie 49513
P.O. Box 10118
Petach Tikva 49001
Tel. +972 3 9221824
Fax +972 3 9240761
mail@ilan-gavish.com

Italy

TRITECNICA S.r.l.
Viale Lazio 26
20135 Milano
Tel. +39 02 541941
Fax +39 02 55010474
info@tritecnica.it

Japan

EUCHNER
Representative Office Japan
8-20-24 Kamitsurumahoncho
Minami-ku, Sagami-hara-shi
Kanagawa 252-0318
Tel. +81 42 8127767
Fax +81 42 7642708
hayashi@euchner.jp

Solton Co. Ltd.

2-13-7, Shin-Yokohama
Kohoku-ku, Yokohama
Japan 222-0033
Tel. +81 45 471-7711
Fax +81 45 471-7717
sales@solton.co.jp

Korea

EUCHNER Korea Co., Ltd.
RM 810 Daerung Technotown 3rd
#448 Gasang-Dong
Gumcheon-gu, Seoul
Tel. +82 2 2107-3500
Fax +82 2 2107-3999
info@euchner.co.kr

Mexico

SEPIA S.A. de C.V.
Maricopa # 10
302, Col. Napoles.
Del. Benito Juarez
03810 Mexico D.F.
Tel. +52 55 55367787
Fax +52 55 56822347
alazcano@sepia.mx

Poland

ELTRON
Pl. Wolności 7B
50-071 Wrocław
Tel. +48 71 3439755
Fax +48 71 3460225
eltron@eltron.pl

Republic of South Africa

RUBICON
ELECTRICAL DISTRIBUTORS
4 Reith Street, Sidwell
6061 Port Elizabeth
Tel. +27 41 451-4359
Fax +27 41 451-1296
sales@rubiconelectrical.com

Romania

First Electric SRL
Str. Ritmului Nr. 1 Bis
Ap. 2, Sector 2
021675 Bucuresti
Tel. +40 21 2526218
Fax +40 21 3113193
office@firstelectric.ro

Singapore

Sentronics
Automation & Marketing Pte Ltd.
Blk 3, Ang Mo Kio Industrial Park 2A
#05-06
Singapore 568050
Tel. +65 6744 8018
Fax +65 6744 1929
sentronics@pacific.net.sg

Slovakia

EUCHNER electric s.r.o.
Videňská 134/102
61900 Brno
Tel. +420 533 443-150
Fax +420 533 443-153
info@euchner.cz

Slovenia

SMM proizvodni sistemi d.o.o.
Jaskova 18
2000 Maribor
Tel. +386 2 4502326
Fax +386 2 4625160
franc.kit@smm.si

Spain

EUCHNER, S.L.
Gurutegi 12 - Local 1
Polígono Belartza
20018 San Sebastian
Tel. +34 943 316-760
Fax +34 943 316-405
comercial@euchner.es

Sweden

Censit AB
Box 331
33123 Värnamo
Tel. +46 370 691010
Fax +46 370 18888
info@censit.se

Switzerland

EUCHNER AG
Grofstrasse 17
8887 Mels
Tel. +41 81 720-4590
Fax +41 81 720-4599
info@euchner.ch

Taiwan

Daybreak Int'l (Taiwan) Corp.
3F, No. 124, Chung-Cheng Road
Shihlin 11145, Taipei
Tel. +886 2 8866-1234
Fax +886 2 8866-1239
day111@ms23.hinet.net

Turkey

Entek Otomasyon Urunleri
San.ve Tic.Ltd.Sti.
Perpa Tic.Mer. B Blok
Kat: 11 No:1622 - 1623
34384 Okmeydani / Istanbul
Tel. +90 212 320-2000 / 01
Fax +90 212 320-1188
entekotomasyon@entek.com.tr

United Kingdom

EUCHNER (UK) Ltd.
Unit 2 Petre Drive,
Sheffield
South Yorkshire
S4 7PZ
Tel. +44 114 2560123
Fax +44 114 2425333
info@euchner.co.uk

USA

EUCHNER USA Inc.
6723 Lyons Street
East Syracuse, NY 13057
Tel. +1 315 701-0315
Fax +1 315 701-0319
info@euchner-usa.com

EUCHNER USA Inc.

Detroit Office
130 Hampton Circle
Rochester Hills, MI 48307
Tel. +1 248 537-1092
Fax +1 248 537-1095
info@euchner-usa.com

Germany

Chemnitz

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Am Vogelherd 2
09627 Bobritzsch
Tel. +49 37325 906000
Fax +49 37325 906004
jens.zehrtrner@euchner.de

Düsseldorf

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Sunderholz 24
45134 Essen
Tel. +49 201 43083-93
Fax +49 201 43083-94
juergen.eumann@euchner.de

Essen/Dortmund

Thomas Kreißl
fördern - steuern - regeln
Hackenbergweg 8a
45133 Essen
Tel. +49 201 84266-0
Fax +49 201 84266-66
info@kreissl-essen.de

Wiesbaden

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Schiersteiner Straße 28
65187 Wiesbaden
Tel. +49 611 98817644
Fax +49 611 98895071
giancarlo.pasquesi@euchner.de

Freiburg

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Steige 5
79206 Breisach
Tel. +49 7664 4038-33
Fax +49 7664 4038-34
peter.seifert@euchner.de

Hamburg

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Bleickenallee 13
22763 Hamburg
Tel. +49 40 636740-57
Fax +49 40 636740-58
volker.behrens@euchner.de

Magdeburg

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Tismarstraße 10
39108 Magdeburg
Tel. +49 391 736279-22
Fax +49 391 736279-23
bernhard.scholz@euchner.de

München

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Obere Bahnhofstraße 6
82110 Germering
Tel. +49 89 800846-85
Fax +49 89 800846-90
st.kornes@euchner.de

Nürnberg

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Steiner Straße 22a
90522 Oberasbach
Tel. +49 911 669-3829
Fax +49 911 669-6722
raff.paulus@euchner.de

Stuttgart

EUCHNER GmbH + Co. KG
Ingenieur- und Vertriebsbüro
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen
Tel. +49 711 7597-0
Fax +49 711 7597-303
oliver.laier@euchner.de
uwe.kupka@euchner.de



EUCHNER

More than safety.



Support hotline

You have technical questions about our products or how they can be used?
For further questions please contact your local sales representative.



Comprehensive download area

You are looking for more information about our products?
You can simply and quickly download operating instructions, CAD or ePLAN data and accompanying software for our products at www.euchner.com.



Customer-specific solutions

You need a specific solution or have a special requirement?
Please contact us. We can manufacture your custom product even in small quantities.



EUCHNER near you

You are looking for a contact at your location? Along with the headquarters in Leinfelden-Echterdingen, the worldwide sales network includes 14 subsidiaries and numerous representatives in Germany and abroad – you will definitely also find us near you.

www.euchner.com

EUCHNER GmbH + Co. KG

Kohlhammerstraße 16
70771 Leinfelden-Echterdingen
Germany
Tel. +49 711 7597-0
Fax +49 711 753316
info@euchner.de
www.euchner.com

EUCHNER

More than safety.