


# UniOP eTOP310

The UniOP eTOP Series 300 combines state-of-the-art features and performance with an outstanding design. They are the ideal choice for HMI applications including factory and building automation. The eTOP310 features an industry-standard 10.4" TFT display with full vector graphic capabilities. This is the ideal product for high-end HMI applications. Connections include Ethernet and USB.

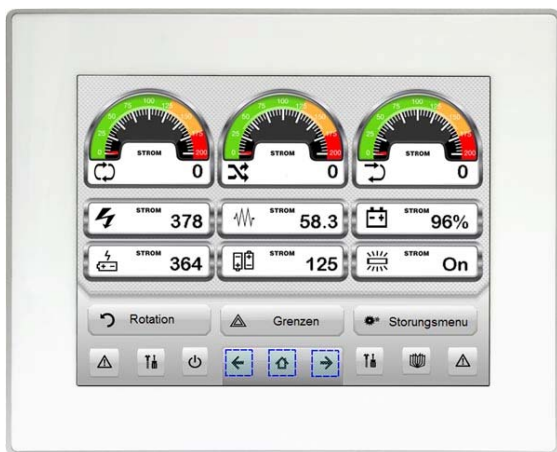

- 10.4" TFT color display, CCFL backlight
- 640x480 pixel (VGA) resolution, 64K colors
- Advanced vector graphics
- Resistive touchscreen
- 64 MB user memory
- 10/100 Ethernet interface
- USB interface
- Connection to bus systems using optional plug-in modules
- Slim design. Mounting depth less than 50mm

## Highlights


The eTOP Series 300 HMI panels are fully compatible with UniOP Designer 6 software.

- Powerful and intuitive programming with the UniOP Designer 6 software.
- Supports more than 150 communication drivers.
- Built-in Ethernet port for communication with devices, programming the HMI from Designer and retrieving data from computers.
- USB host port for the connection of flash drives. Flash drives can be used for upgrading applications and firmware.
- Optional plug-in modules for fieldbus systems and networks. Compatible with TCM and SCM modules.
- Dual-driver communication capability.
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Data display in numerical, text, bargraph, analog gauges and graphic image formats. Dynamic object properties supported.
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection or copied to flash drives via USB connection.
- Multilanguage applications. Far East languages are supported. The number of runtime languages is limited only by the available memory. All text information in the application can be exported to files in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.


## Technical Data

<b>Display</b>		<b>Alarms</b>	
Type	TFT	Event list	1024
Resolution	640x480, VGA	Password	1024
Active display area	10.4" diagonal	Hardware Real Time	Yes
Colors	64K	Clock	Yes, with battery back-up
Backlight	CCFL	Screen saver	Yes
Brightness	250 Cd/m <sup>2</sup> typ.	Buzzer	Yes, audible feedback for touchscreen
Dimming	Yes		
<b>Memory</b>		<b>Ratings</b>	
User memory	64 MB internal Flash	Power supply voltage	24 Vdc (18 to 30 Vdc)
		Current consumption	1.2 A at 24 Vdc(max.)
<b>Front panel</b>		Fuse	Automatic
Touchscreen	Analog resistive	Weight	Approx 2.1 Kg
User LED indicators	1	Battery	Rechargeable Lithium battery, not user-replaceable
System LED indicators	4		
<b>Interfaces</b>		<b>Environmental Conditions</b>	
Ethernet port	10/100 Mbit	Operating temperature	0 to 50 °C
USB port	Host interface, version 1.1	Storage temperature	-20 to +70 °C
PC/Printer port	RS-232, RS-485, RS-422, software configurable	Operating and storage humidity	5 – 85 % relative humidity, non-condensing
PLC port	RS-232, RS-485, RS-422, software configurable	Protection class	IP65 (front panel) IP20 (rear)
Aux port	Yes, fieldbus and controller modules		
<b>Functionality</b>		<b>Dimensions</b>	
Vector graphics	Yes	Faceplate LxH	287x232 mm
Object dynamics (hide/show)	Yes	Cutout AxB	276x221 mm
TrueType fonts	Yes	Depth D+T	42mm+4mm
Dual driver capability	Yes		
Video input	No	<b>Approvals</b>	
Data acquisition and trends	Yes	CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
Multilanguage	Yes, number of run-time languages limited only by available memory		
Recipe memory	Yes. Flash memory storage limited only by available memory		
UniNet network	Client/Server		

## Dimensions

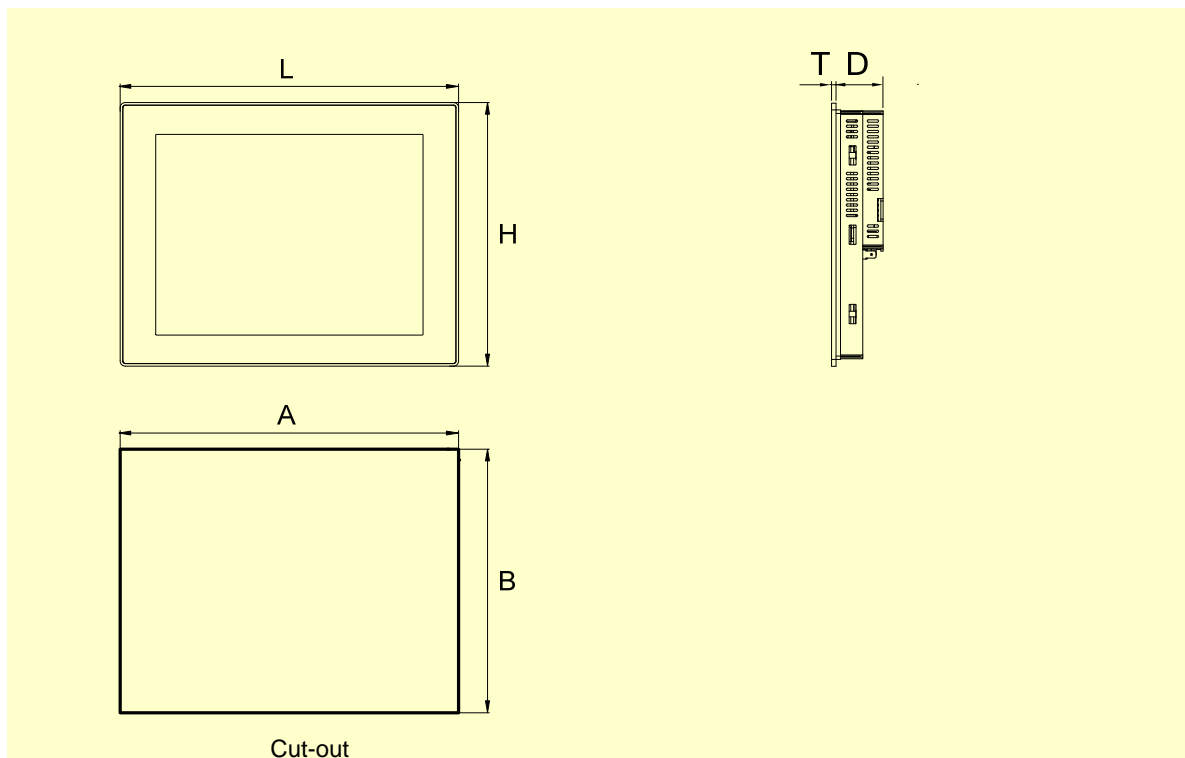

## Connections

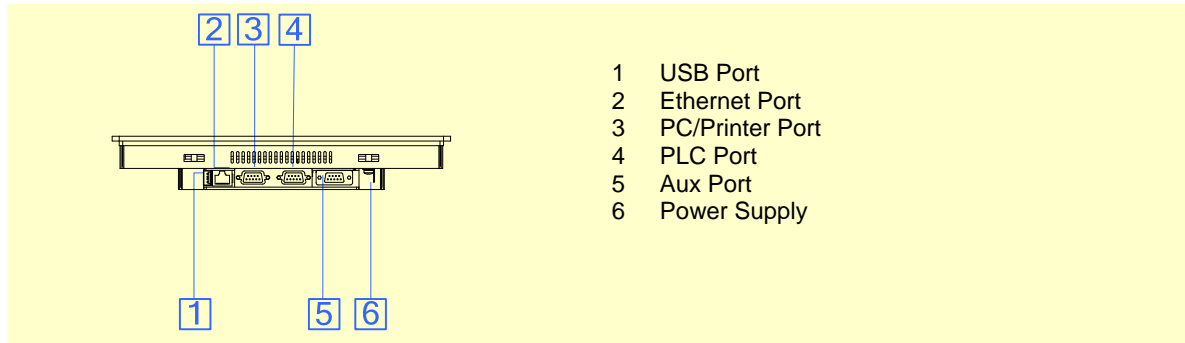

**Ordering Information**

<b>Model</b>	<b>Part Number</b>	<b>Description</b>
eTOP310	ETOP310U101	10.4" TFT color touchscreen with Ethernet and USB interfaces. White front panel.
	ETOP310U201	10.4" TFT color touchscreen with Ethernet and USB interfaces. Black front panel.
	ETOP310U301	10.4" TFT color touchscreen with Ethernet and USB interfaces. Grey front panel.
PROT-14		Disposable protection foil for 10.4" eTOP touch panels (10 pieces).
PROT-20		Disposable protection foil for 10.4" eTOP touch panels (10 pieces). UV resistant.

---

**ptn0317****Ver. 1.0****Copyright © 2009 Sitek S.p.A. – Verona, Italy**

Subject to change without notice.

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

[www.uniop.com](http://www.uniop.com)