








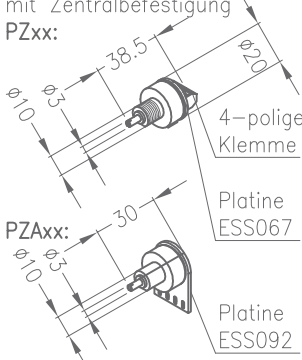


TI-POTI-1

Drahtgewickelte Potentiometer

TI-POTI-1

Allgemein: Widerstandstoleranz ±5% drahtgewickelt Schleiferstrom max. 100 mA	Schaltbild: 	Ohmwert R	Typ	Spobu Mat.-Nr.		Anbau an Joystick				
						M0	VCS0	VNS0	NNS0	VNS2
PD550-S233 10 Mio. Spiele 3 Watt bei 20 °C Aufreihbar mit Innenvierkant 		600R-0-600R 1 k-0-1 k 1k5-0-1k5 2 k-0-2 k 2k5-0-2k5 3 k-0-3 k 5 k-0-5 k 10 k-0-10 k	PQ0606 PQ11 PQ1.51.5 PQ22 PQ2.52.5 PQ33 PQ55 PQ1010	10849 11437 11892 11786 10847 11893 12072 11894	-	-	✓	✓	-	✓
PD550-S286 10 Mio. Spiele 3 Watt bei 20 °C Aufreihbar mit Innenvierkant 		500R-500R 1 k-1 k 1k5-1k5 2k5-2k5 5 k-5 k 10 k-10 k	PQS0505 PQS11 PQS1.51.5 PQS2.52.5 PQS55 PQS1010	10848 17791 10843 12028 12120 10846	-	-	✓	✓	-	✓
PW55/01d-SM 7206-17A 10 Mio. Spiele 3 Watt bei 20 °C Aufreihbar mit Innenvierkant 		2k5-0-2k5 5 k-0-5 k	PQN2.52.5 PQN55	20579 32685	-	-	-	-	✓	-
PW55/01d-SM 7206-17B 10 Mio. Spiele 3 Watt bei 20 °C Aufreihbar mit Innenvierkant 		5 k-5 k	PQNS55	25360	-	-	-	-	✓	-
PD 200-S237 2 Mio. Spiele 2 Watt bei 20 °C mit Zentralbefestigung PZxx: 	 Version K mit Platine ESS092 und 4-poliger Klemmleiste	1 k-0-1 k 2 k-0-2 k 5 k-0-5 k 10 k-0-10 k 1 k-0-1 k 2 k-0-2 k 5 k-0-5 k 10 k-0-10 k 1 k-0-1 k 2 k-0-2 k 5 k-0-5 k 10 k-0-10 k	PZ11 PZ22 PZ55 PZ1010 PZA11 PZA22 PZA55 PZA1010 PZA11K PZA22K PZA55K PZA1010K	20969 20970 20971 20972 	-	✓	✓	✓	✓	✓
					-	✓	✓	✓	✓	✓
					-	✓	✓	✓	✓	✓



Spohn+Burkhardt
Elektrotechnische Fabrik Blaubeuren

Mauergasse 5
89143 BLAUBEUREN
GERMANY

Tel. +49 7344 171-0 info@spobu.de
Fax +49 7344 171-99 www.spobu.de