



电气连接系统

铜质管制电缆端子和接续管

Klauke® KI



■ 管制电缆端子，铜质，6 - 400mm²
标准型

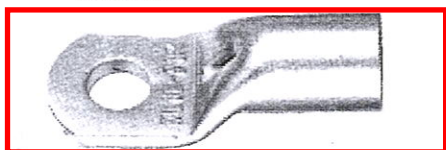

■ 用于多股圆形导线，如 VDE 0295 第 2 类
■ 用于预先处理为圆形的扇形导线

特性


- 退火材料可优化材料及其压接特性
- 平面接触面和精确螺钉端部便于插入电缆

材料

■ 符合 EN 13600 的铜

表面

■ 镀锡



订购信息

■ 亦可提供带有检查孔的电缆端子，其零件号带有“ms”

横截面	螺栓尺寸	产品编号	尺寸 mm								重量 / 100 件 ~kg	件数
mm ²	Φ		d1	a	b	d2	d4	c1	c2	l		
6	M5	1R5	3.5	9	10	5.5	6.5	6.50	7.5	21	0.50	100
	M6	1R6	3.5	9	12	6.5	6.5	6.50	7.5	21	0.47	100
	M8	1R8	3.5	9	15	8.5	6.5	10.00	10.0	23	0.54	100
	M10	1R10	3.5	9	17	10.5	6.5	12.00	12.0	25	0.59	100
	M12	1R12	3.5	9	19	13.0	6.5	13.00	13.0	28	0.63	100
10	M5	2R5	4.5	10	12	5.5	7.0	6.50	7.5	22	0.50	100
	M6	2R6	4.5	10	12	6.5	7.0	6.50	7.5	22	0.49	100
	M8	2R8	4.5	10	15	8.5	7.0	10.00	10.0	25	0.58	100
	M10	2R10	4.5	10	17	10.5	7.0	12.00	12.0	27	0.62	100
	M12	2R12	4.5	10	19	13.0	7.0	13.00	13.0	29	0.64	100
16	M5	3R5	5.5	13	12	5.5	8.5	5.50	6.5	26	0.84	100
	M6	3R6	5.5	13	12	6.5	8.5	6.25	7.5	27	0.86	100
	M8	3R8	5.5	13	15	8.5	8.5	8.50	9.5	29	0.93	100
	M10	3R10	5.5	13	17	10.5	8.5	10.50	11.5	31	0.99	100
	M12	3R12	5.5	13	19	13.0	8.5	12.00	13.0	33	1.02	100
25	M5	4R5	7.0	15	14	5.5	10.0	7.50	7.5	30	1.22	100
	M6	4R6	7.0	15	14	6.5	10.0	7.50	7.5	30	1.20	100
	M8	4R8	7.0	15	16	8.5	10.0	10.00	10.0	32	1.31	100
	M10	4R10	7.0	15	18	10.5	10.0	12.00	12.0	34	1.57	100
	M12	4R12	7.0	15	19	13.0	10.0	13.00	13.0	35	1.39	100
	M14	4R14	7.0	15	21	15.0	10.0	14.50	14.5	38	1.49	100
35	M6	5R6	8.5	17	17	6.5	12.0	7.50	7.5	32	1.85	100
	M8	5R8	8.5	17	17	8.5	12.0	10.00	10.0	34	2.00	100
	M10	5R10	8.5	17	19	10.5	12.0	12.00	12.0	37	2.13	100
	M12	5R12	8.5	17	21	13.0	12.0	13.00	13.0	38	2.13	100
	M14	5R14	8.5	17	21	15.0	12.0	14.50	14.5	40	2.13	100
45	M6	6R6	10.0	19	20	6.5	14.0	10.00	10.0	37	3.00	100
	M8	6R8	10.0	19	20	8.5	14.0	10.00	10.0	37	2.93	100
	M10	6R10	10.0	19	20	10.5	14.0	12.00	12.0	39	3.08	100
	M12	6R12	10.0	19	23	13.0	14.0	13.00	13.0	43	3.13	100

5R12-MS