


KFR183KL0 Technical data sheet

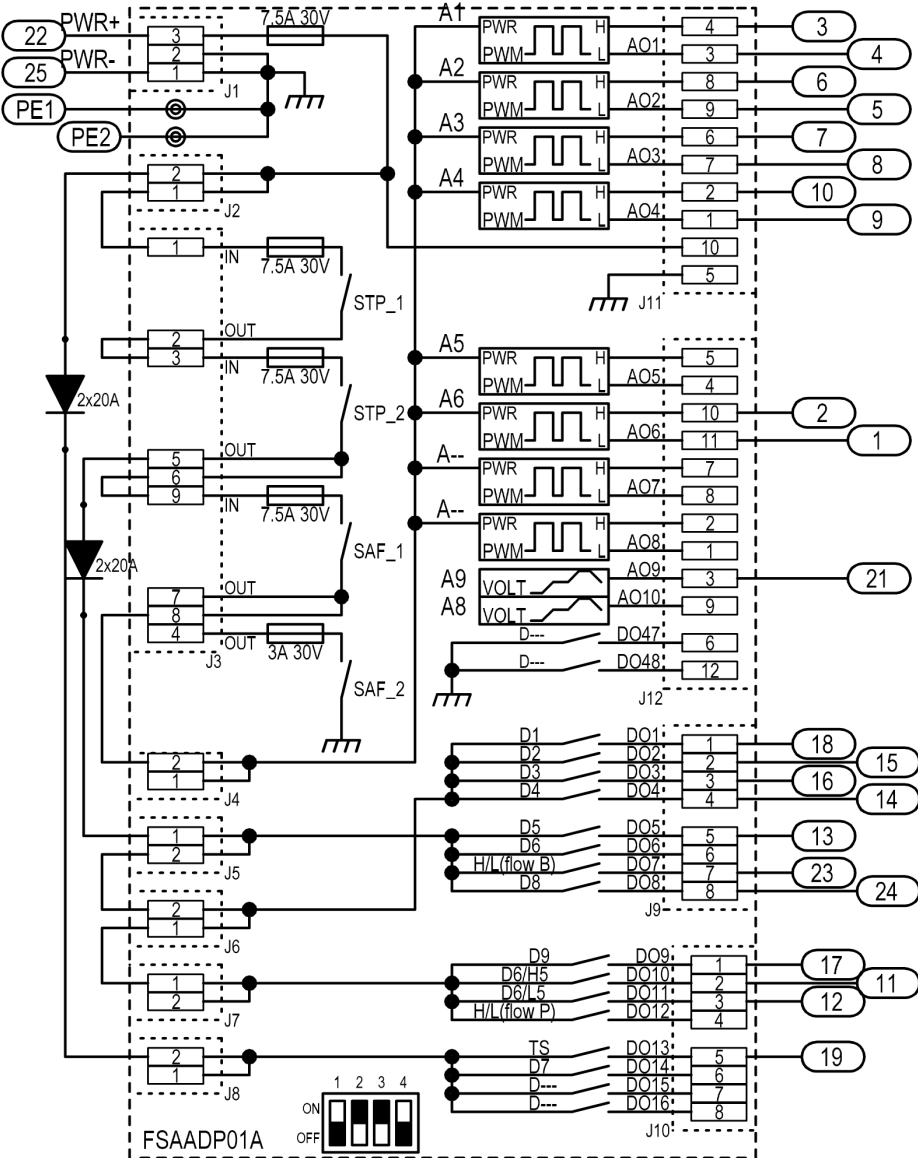

Pompa: H/L(flow P)= Flow
Betonpompa: H/L(flow B)= Flow (noH5/L5)

SETTINGS

AD_SERMA05-*.par

A1, A2, A3, A4, A5, A6

Imin=280mA Imax=500mA

Imin=280mA Imax=400mA

PWM: 70 Hz

A9 5 - 0V

A4 Ramp UP/DOWN 930 ms

Passive Stop: 1,2 s

Automatic Switch Off: NO

Low Power: NO

* D4 e D5 devono essere disabilitati per eseguire Start Motore (D8)

