


Regulator with Filter

Model KZ03

OVERVIEW

The Regulator with Filter provides a constant pressure of clean, dry supply air to pneumatic instruments and control valves. An air-set incorporated with a pressure adjustment wheel can be used for manual driving of a pneumatic cylinder and for manual setting of a pneumatic signal.

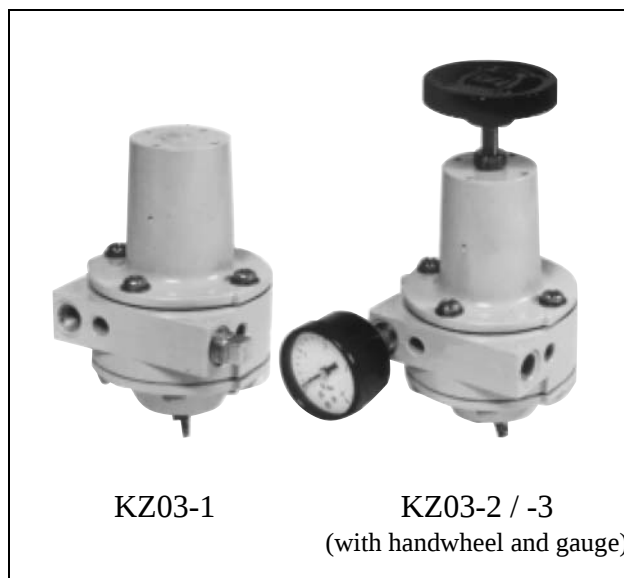

KZ03-1

KZ03-2 / -3
(with handwheel and gauge)

SPECIFICATIONS

Model no.		KZ03-1	KZ03-2	KZ03-3
Primary pressure (kPa)		Secondary pressure +50 or more (970 max.)		
Secondary pressure (kPa)		140 ± 4 (fixed)	12 to 400 (variable)	12 to 700 (variable)
Performance				
Pressure regulation	Change of secondary pressure (kPa)	140 ± 4 for primary pressure change of 200 to 970	400 ± 4 for primary pressure change of 450 to 970	700 ± 4 for primary pressure change of 800 to 970
Flow characteristics (kPa)	1) KZ03-1 (for prim. press. 300 - 900) 2) KZ03-2 (for prim. press. 500 - 900) 3) KZ03-3 (for prim. press. 800 - 900)			
Air consumption		0.95 ℓ/min(N) or less		
Material		Filter: Sponge, 3 μm (option: 5 μm stainless filter) Case: Aluminum diecast External screws and drain wing bolt: Stainless steel		
Ambient temperature		-30 to 80°C		
Air pressure connections		Rc1/4 or 1/4NPT internal thread		
Drain capacity		22 cm ³		
Weight		0.7 kg		


MODEL SELECTION**Pressure regulator with filter**

Model KZ03 - I II - III IV

Basic model no.		Selections		Optional selections	
	KZ03				
I	Ps = 140 ± 4 kPa	1			
	Available supply pressure (Ps): Ps ≤ 400 kPa	2			
	Available supply pressure (Ps): 400 < Ps ≤ 700 kPa	3			
II	Rc1/4 internal (Standard)		A		
	1/4NPT female		B		
III	Without pressure gauge				XX
IV	1½ inch (40 mm) with pressure gauge (scale)				
	Primary maximum scale & unit		Secondly unit	Recommended supply pressure	
	2	kgf/cm ²	none	Ps ≤ 1.5 kgf/cm ²	1A
	4			1.5 < Ps ≤ 3.0 kgf/cm ²	1B
	6			3.0 < Ps ≤ 4.5 kgf/cm ²	1N
	10			4.5 < Ps ≤ 7.0 kgf/cm ²	1C
	30	psi	none	Ps ≤ 22 psi	1D
	60			22 < Ps ≤ 45 psi	1E
	100			45 < Ps ≤ 65 psi	1P
	150			65 < Ps ≤ 100 psi	1F
	2	bar	none	Ps ≤ 1.5 bar	1G
	4			1.5 < Ps ≤ 3.0 bar	1H
	6			3.0 < Ps ≤ 4.5 bar	1Q
	10			4.5 < Ps ≤ 7.0 bar	1J
	200	kPa	none	Ps ≤ 150 kPa	1K
	400			150 < Ps ≤ 300 kPa	1L
	600			300 < Ps ≤ 450 kPa	1R
	1,000			450 < Ps ≤ 700 kPa	1M
	0.2	MPa	none	Ps ≤ 0.15 MPa	1S
	0.4			0.15 < Ps ≤ 0.3 MPa	1T
	0.6			0.3 < Ps ≤ 0.45 MPa	1U
	1			0.45 < Ps ≤ 0.7 MPa	1V
	2	kgf/cm ²	kPa	Ps ≤ 1.5 kgf/cm ²	2A
	4			1.5 < Ps ≤ 3.0 kgf/cm ²	2B
	6			3.0 < Ps ≤ 4.5 kgf/cm ²	2N
	10			4.5 < Ps ≤ 7.0 kgf/cm ²	2C
	2	kgf/cm ²	MPa	Ps ≤ 1.5 kgf/cm ²	3A
	4			1.5 < Ps ≤ 3.0 kgf/cm ²	3B
	6			3.0 < Ps ≤ 4.5 kgf/cm ²	3N
	10			4.5 < Ps ≤ 7.0 kgf/cm ²	3C
	200	kPa	kgf/cm ²	Ps ≤ 150 kPa	4K
	400			150 < Ps ≤ 300 kPa	4L
	600			300 < Ps ≤ 450 kPa	4R
	1000			450 < Ps ≤ 700 kPa	4M
	0.2	MPa	kgf/cm ²	Ps ≤ 0.15 MPa	5S
	0.4			0.15 < Ps ≤ 0.3 MPa	5T
	0.6			0.3 < Ps ≤ 0.45 MPa	5U
	1			0.45 < Ps ≤ 0.7 MPa	5V

DIMENSIONS

[Unit: mm]

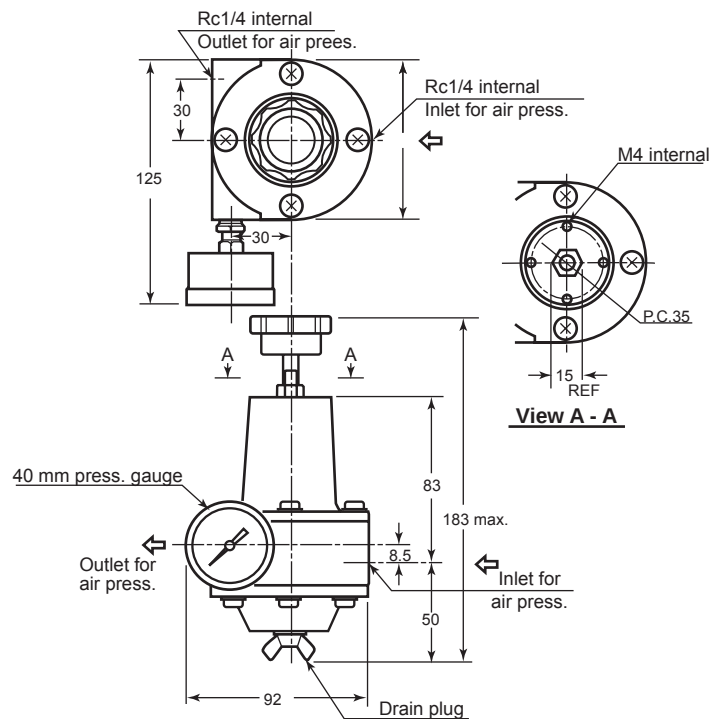

Note) The illustration is for regulator with filter incorporated with pressure adjustment wheel and 40 mm dia. pressure gauge.

Yamatake Corporation

Totate international Building
2-12-19 Shibuya
Shibuya-ku, Tokyo 150-8316
Japan

Tel : 81-3-3486-2310

Fax : 81-3-3486-2593

YAMATAKE
Savemation
Saving through Automation