

Tabella / Table 16

Codice Part number	Tabella / Table "A" DIN 5480		Tabella / Table "B" DIN 5482		Tabella / Table "E" ANSI B 92.1-1970	
	Z	Tipo / Type	Z	Tipo / Type	Z	Spline size
01	14	W20x1,25x14	8	15x12	13	8/16
02	18	W25x1,25x18	9	17x14	15	8/16
03	6	W15x2x6	10	18x15	17	8/16
04	6	W16x2x6	12	20x17	14	12/24
05	7	W17x2x7	13	22x19	16	12/24
06	-	-	14	25x22	17	12/24
07	8	W20x2x8	15	28x25	9	16/32
08	9	W22x2x9	16	30x27	11	16/32
09	11	W25x2x11	17	32x28	12	16/32
10	12	W28x2x12	18	35x31	13	16/32
11	13	W30x2x13	19	38x34	15	16/32
12	14	W30x2x14	20	40x36	21	16/32
13	14	W32x2x14	21	42x38	23	16/32
14	16	W35x2x16	22	45x41	27	16/32
15	17	W37x2x17	23	48x44	40	24/48
16	18	W38x2x18	24	50x45	14	24/48
17	18	W40x2x18	25	52x47	20	24/48
18	20	W42x2x20	26	55x50	21	24/48
19	21	W45x2x21	27	58x53	23	24/48
20	24	W50x2x24	28	60x55	25	24/48
21	26	W55x2x26	29	62x57	26	24/48
22	28	W58x2x28	30	65x60	27	24/48
23	28	W60x2x28	31	68x62	28	24/48
24	31	W65x2x31	32	70x64	29	24/48
25	34	W70x2x34	33	72x66	32	24/48
26	30	W80x2x38	34	75x69	21	32/64
27	-	-	35	78x72	24	32/64
28	-	-	36	80x74	30	32/64
29	-	-	37	82x76	33	32/64
30	-	-	38	85x79	23	40/80
31	-	-	39	88x82	36	48/96
32	-	-	40	90x84	41	48/96
33	-	-	41	92x86	47	48/96
34	-	-	42	95x89	-	-
35	-	-	43	98x92	-	-
36	-	-	44	100x94	-	-
37	-	-	8	32x36	-	-

97, 98, 99 solo per giunti di tipo in alluminio e ghisa
97, 98, 99 only on cast-iron and aluminium couplings

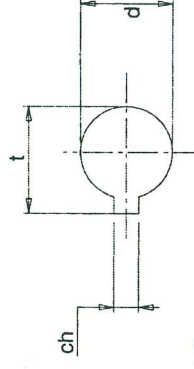


Tabella / Table 18

Lavorazione per albero condotto Machining of pump side					Secondo la normativa According to standard
Codice Part number	Dimensioni / Dimensions (mm)				
	d	ch	t		
01	10	3	11,4		UNEL - MEC 63
02	11	4	12,8		
03	12	3	13,8		
04	12	4	13,8		
05	13,45	3,17	14,9		UNEL - MEC 71
06	14	3	16,3		
07	14	5	16,3		
08	15	4	17,3		
09	15	5	17,3		SAE
10	15,88	4	17,7		
11	15,88	4,76	18,1		
12	16	4	17,5		
13	16	5	18,3		UNEL - MEC 80
14	17	5	19,3		
15	17,46	4,76	19,6		
16	18	5	20,3		
17	18	6	20,8		SAE A
18	19	3	20,8		
19	19	5	21,3		
20	19	6	21,8		
21	19,05	3,17	20,7		ISO 80
22	19,05	4,76	21,3		
23	20	5	22,4		
24	20	6	22,8		
25	22	5	24,8		SAE B
26	22	6	24,8		
27	22,22	4,76	24,8		
28	22,22	6,35	25		
29	24	6	26,5		UNEL - MEC 90
30	24	7	27,3		
31	24	8	27,3		
32	25	6	28		
33	25	7	28,3		ISO 100
34	25	8	28,3		
35	25,4	6,35	28,8		
36	28	8	31,3		
37	30	8	33,3		UNEL-MEC 100-112
38	30	10	33,3		
39	31,75	6,35	35,1		
40	31,75	7,94	35,5		
41	31,75	8	35,5		SAE C
42	32	8	35,3		
43	32	10	35,3		
44	33	10	36,3		
45	34,9	7,94	38,6		ISO 125
46	35	10	38,3		
47	38	10	41,3		
48	38,1	9,52	42,5		
49	40	10	43,3		SAE
50	40	12	43,3		
51	42	12	45,3		
52	44,45	11,11	49,4		
53	45	14	48,8		UNEL - MEC 132
54	48	14	51,8		
55	50	14	53,8		
56	55	16	59,3		
57	60	18	64,4		ISO 160
58	65	18	69,4		
59	70	20	74,9		
60	75	20	79,9		
61	80	22	85,4		UNEL - MEC 160
62	12,7	3,18	13,8		
63	38,1	7,94	42		
64	9	4	11		
65	11	3	12,8		UNEL - MEC 180
66	9	3	11		
67	6	2	7		
68	7	2	8		