

# DYNISCO MODELS PT4624, PT4625 & PT4626

## Amplified Output Melt Pressure Transmitters with Flexible Stem

### Description

Models PT4624, PT4625 and PT4626 add built - in amplifiers to the basic PT462E melt pressure transducer, eliminating the need for external signal conditioning. All models interface directly with distributed control systems, PLCs, computers and similar high level control devices.

### Features

- Better than  $\pm 0.5\%$  accuracy
- 4 to 20 mA, 0 to 5 Vdc, 1 to 6 Vdc, 0 to 10 Vdc, 1 to 11 Vdc outputs
- Flexible stem
- 0 - 500 to 0 - 30,000 psi
- Internal 80% shunt calibration
- Adjustable zero and span

### Benefits

- Reliable pressure measurement
- Direct input to supervisory control systems
- Easy to install, ideal for high local temperature
- Choice of pressure ranges
- Easy set-up
- Adapt transmitter to process conditions



## Specifications

### Performance Characteristics

**Ranges (psi):** 0 - 500, 0 - 750, 0 - 1,000, 0 - 1,500, 0 - 3,000, 0 - 5,000, 0 - 7,500, 0 - 10,000, 0 - 15,000, 0 - 20,000, 0 - 30,000  
**Accuracy:**  $\pm 0.5\%$  FSO  
**Repeatability:**  $\pm 0.2\%$  FSO

**Mounting torque:** 500 inch - lbs. maximum  
**Maximum pressure:** 2 x full range or 35,000 psi (whichever is less)  
**Material in contact with pressure media:** 15 - 5 PH stainless steel, Armoloy coated  
**Weight:** 2 lbs.

### Electrical Characteristics

#### PT4624:

**Output:** 4 to 20 mA, 2 - wire  
**Input voltage:** 14 to 36 Vdc  
**Load resistance:** 0 to 1,100 Ohms  
**Zero adjustment:**  $\pm 20\%$   
**Span adjustment:**  $\pm 20\%$   
**Shunt calibration:** 80% FSO (all models)

#### PT4625:

**Output:** 0 to 5 Vdc  
**Input voltage:** 11 to 36 Vdc  
**Load resistance:** 2,000 Ohms minimum  
**Zero balance adjustment range:**  $\pm 15\%$   
**Span adjustment range:**  $\pm 15\%$

#### PT4626:

**Output:** 0 to 10 Vdc  
**Input voltage:** 16 to 36 Vdc  
**Load resistance:** 2,000 Ohms minimum  
**Zero balance adjustment range:**  $\pm 15\%$   
**Span adjustment range:**  $\pm 15\%$

#### PT4625B:

**Output:** 1 to 6 Vdc  
**Input voltage:** 11 to 36 Vdc  
**Load resistance:** 2,000 Ohms minimum  
**Zero balance adjustment range:**  $\pm 15\%$   
**Span adjustment range:**  $\pm 15\%$

#### PT4626B:

**Output:** 1 to 11 Vdc  
**Input voltage:** 16 to 36 Vdc  
**Load resistance:** 2,000 Ohms minimum  
**Zero balance adjustment range:**  $\pm 15\%$   
**Span adjustment range:**  $\pm 15\%$

### Temperature Characteristics

#### Transducer diaphragm


**Maximum diaphragm temperature:** 750°F (400°C)  
**Zero shift due to temperature change:** 25 psi/100°F (45 psi/100°C)

#### Electronics housing

**Operating temperature range:** -20°F to +160°F (-29°C to +71°C)  
**Temperature effects over a compensated range of +30°F to +160°F (-1°C to +71°C):**  
**Thermal effect on zero:**  $\pm 0.05\%$  of full scale/°F  
**Thermal effect on span:**  $\pm 0.02\%$  of full scale/°F

# DYNISCO MODELS PT4624, PT4625 & PT4626

## Amplified Output Melt Pressure Transmitters with Flexible Stem

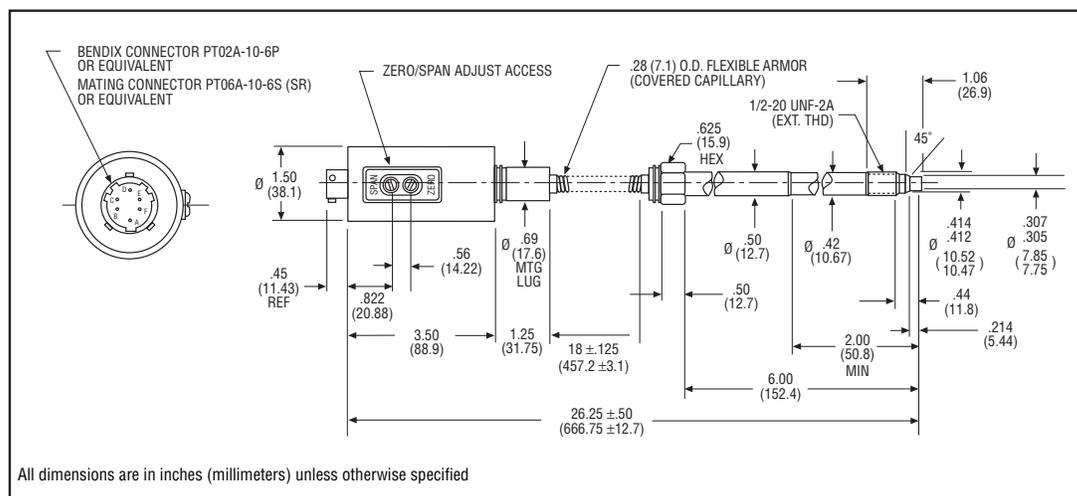

### Ordering Guide

Model	Pressure Range (psi)		Rigid Stem		Flexible Stem	
	Code	Range	Code	Length	Code	Length
PT4624 (4 - 20 mA)	5C	0 - 500				
	7.5C	0 - 750				
PT4625 (0 - 5 Vdc)	1M	0 - 1,000				
	1.5M	0 - 1,500	3	3"		
PT4625B (1 - 6 Vdc)	3M	0 - 3,000	4	4"		
	5M	0 - 5,000	6	6"	18	18"
PT4626 (0 - 10 Vdc)	7.5M	0 - 7,500	9	9"		
	10M	0 - 10,000	12	12"		
PT4626B (1 - 11 Vdc)	15M	0 - 15,000				
	20M	0 - 20,000				
	30M	0 - 30,000				

Ordering Example: PT4624 - 5M - 6/18

- Mating connector P/N711600 or 6 - pin cable assembly sold separately. Refer to Accessories and Options Section.
- Transducer Options: Refer to Accessories and Options Section for complete information on stem length, transducer diaphragm, diaphragm and thread coatings and fill media.

### Delivery

Express delivery. Call for delivery information on other configurations. Refer to Accessories and Options Section for additional delivery time on products with added options.