

Accessory 9003-2/-3/-6

Features

- Two-, three-, and six-slot chassis serve as small standalone housings for Series 9000 rack-mount cards
- Uses 9010 or 9020 external power supplies
- Optional vertical mounting stand available
- Supported by the Network Management System


Accessory

Description

The Model 9003 chassis are compact rugged enclosures that are available in two-, three-, and six-slot versions for rack mounting Series 9000 cards in standalone applications. Four mounting holes are provided for attaching to a wall or other vertical flat surface. Since Series 9000 cards should operate in the vertical plane for proper ventilation, this chassis should not be mounted horizontally. To place the chassis on a horizontal surface, use the optional Vertical Mounting Base.

Blank panels should be ordered to cover unused slots. See the Optional Accessories Ordering Information below. The chassis are powered either by the Model 9010 or the 9020 external power supply, depending on the chassis and the current requirements of the installed cards. Power supplies are ordered separately. Refer to the Ordering Information for details.

Ordering information

Model	Slots	Power Supply Required
9003-2	2	9010
9003-3	3	9010
9003-6	6	9010 or 9020

Optional accessories ordering information

Model Number	Description
9996	Single Blank Panel (1-Slot Cover Plate)
9998	Triple Blank Panel (3-Slot Cover Plate)
9997-2	Vertical Mounting Stand, 2-Slot Chassis
9997-3	Vertical Mounting Stand, 3-Slot Chassis
9997-6	Vertical Mounting Stand, 6-Slot Chassis

Accessory 9003-2/-3/-6

Technical Specifications

Physical

9003-2

Dimensions (h x w x d)

Weight (approx.)

Power input connectors

7.1 in. x 1.749 in. x 8.558 in. (180.34 mm x 44.42 mm x 217.37 mm)

1.18 lbs. (535.2 gm)

2.5 x 5.5 mm male barrel-type, center position, 6VDC

9003-3

Dimensions (h x w x d)

Weight (approx.)

Power input connectors

7.1 in. x 2.562 in. x 8.558 in. (180.34 mm x 65.07 mm x 217.37 mm)

1.375 lbs. (623.7 gm)

2.5 x 5.5 mm male barrel-type, center position, 6VDC

9003-6

Dimensions (h x w x d)

Weight (approx.)

Power input connectors

7.1 in. x 5.0 in. x 8.558 in. (180.34 mm x 127.0 mm x 217.37 mm)

1.9 lbs. (861.8 gm)

6-pin male circular DIN, 6VDC

Environmental

Operating Temperature


Storage Temperature

Relative Humidity


-40° C to +74° C (-40° F to 165.2° F)

-55° C to +85° C (-67° F to 185° F)

0 to 95% noncondensing

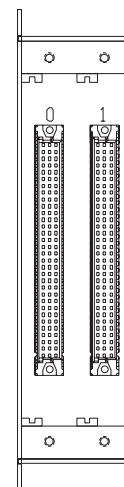

9003-2 Card Entry View



9003-6 Card Entry View



U.S. +1 800. 293. 4237 or +1 301. 444. 2200 Europe +31 182. 592. 333 Asia +65 6264 7502 Web www.optelecom-nkf.com

In line with Optelecom-NKF's policy of continuous product improvement, we reserve the right to vary descriptions and specifications without notice.

2/07

The management system governing the manufacture of this product is ISO 9001:2000 certified.

