
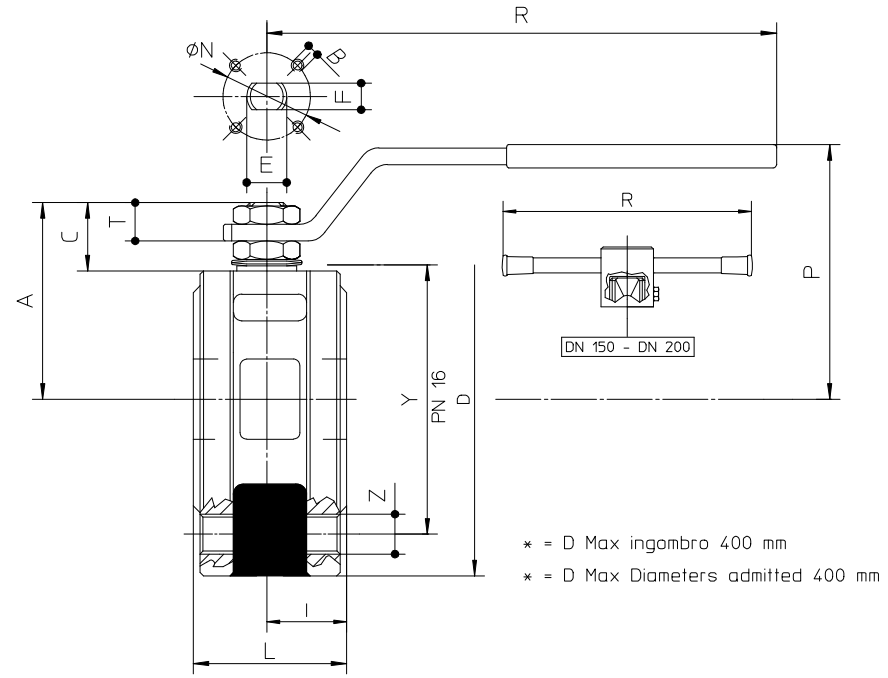
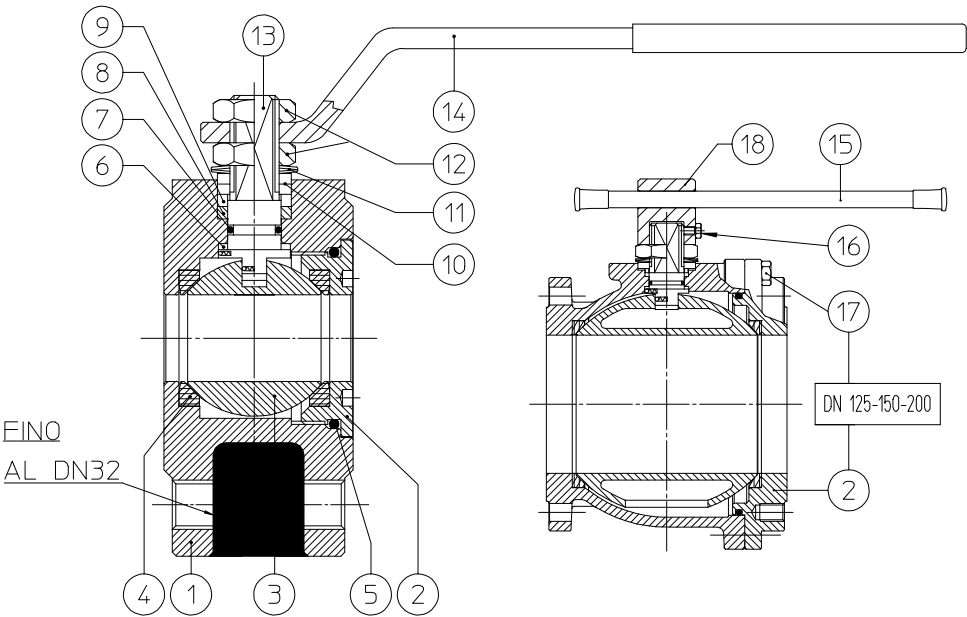




* = D Max ingombro 400 mm
* = D Max Diameters admitted 400 mm

POS.	DENOMINAZIONE	PART NAME	DESCRIPTION	TEILBENENNUNG	MATERIALE-MATERIALS MATERIAUX-WERKSTOF	Nº P.
1	CORPO *	BODY	CORPS	GEHAUSE	INOX AISI 316 - CF8M	1
2	GHIERA	END CONNECTION	RACCORD	RING	INOX AISI 316	1
3	SFERA	BALL	BILLE	KUGEL	INOX AISI 316	1
4	GUARNIZIONE SFERA	BALL SEATS	JOINT DE TENUE BILLE	KUGELDICHTUNG	P.T.F.E.+25% CARBONE	2
5	O-RING	RING	O-RING	O-RING	FKM (VITON)	1
6	RONDELLA ASTA	THRUST WASHER	RONDELLE DE L' AXE	SPINDELSCHEIBE	P.T.F.E.+25% CARBONE	1
7	O - RING	RING	O - RING	O - RING	FKM (VITON)	1
8	GUARNIZIONE ASTA	STEM SEAT	JOINT DE L' AXE	SPINDELDICHTUNG	P.T.F.E.+25% CARBONE	1
9	BUSSOLA PREMIGUARNIZIONE	PAKING GLAND	BAGUE DE PRESSE ETOUPE	VORSPANNRING	AVP-9SMNPB36	1
10	RONDELLA MEZZOGIRO	END STOP	RONDELLE	ANSCHLAGSCHEIBE	INOX AISI 430 (DN 15 - DN 50) UNI 7070 (DN 65 - DN 200)	2 1
11	MOLLA A TAZZA	SPRING WASHER	RESSORT A' DISQUES	TELLERFEDER	UNI 3545	2
12	DADO	NUT	ECROU	MUTTER	UNI 5771	2
13	ASTA	STEM	TIGE	SPINDEL	INOX AISI 316	1
14	LEVA	HANDLE	LEVIER DE COMMANDE	HANDEBEL	UNI 7070□	1
15	LEVA DN 150-200	HANDLE DN 150-200	LEVIER DE COMMANDE DN 150-200	HANDEBEL DN 150-200	UNI 7230	1
16	VITE	SCREW	VIS	SCHRAUBE	UNI 7356	1
17	VITE	SCREW	VIS	SCHRAUBE	UNI 7356	8-12
18	CORPO LEVA DN 150-200	BODY HANDLE DN 150-200	CORPS LEV.DE COMM.DN 150-200	HEBELAUFN.DN 150-200	GG 25 UNI 5007	1

DN	D	Y	Z	I	L	R	P	A	C	T	E	F	N	B	PN	Kg
1/2"	15 mm	90	65	4xM12	19	35	131.5	64.5	47	15.5	9	10	7	32	4xM5	1.3
3/4"	20 mm	100	75	4xM12	20	40	131.5	69	51.5	15.5	9	10	7	32	4xM5	1.9
1"	25 mm	110	85	4xM12	24	46	174.5	80.4	61	19.5	11.5	12	8	42	4xM5	2.7
1" 1/4	32 mm	130	100	4xM16	28	54	174.5	84.4	64.5	16.5	11.5	12	8	42	4xM5	4.2
1" 1/2	40 mm	150	110	4xM16	31.75	63.5	250.5	102.5	78	24.5	13	16	10	50	4xM6	4.2
2"	50 mm	165	125	4xM16	41	82	250.5	111	87	25	13.5	16	10	50	4xM6	6.1
2" 1/2	65 mm	185	145	4xM16	51.5	103	321.5	128	104.5	28	18	20	14	70	4xM8	10
3"	80 mm	200	160	8xM16	61	122	321.5	139	114.5	27.5	18	20	14	70	4xM8	13.5
4"	100 mm	220	180	8xM16	76	152	381.5	156.5	137	34.5	22	24	18	102	4xM10	20.9
5"	125 mm	250	210	8xM16	98	196	381.5	178.5	159	34	22	24	18	102	4xM10	37.5
6"	150 mm	285	240	8xM20	116	232	700	237	201.5	51.5	30	42	30	125	4xM12	61.5
8"	200 mm	340*	295	12xM20	158.5	317	700	280	245	51.5	30	42	30	125	4xM12	102

TEST	ISO 5208	LOCTITE	-	GREASE	PROBA 270	DESCRIPTION	VALVOLA A SFERA FLANGIATA A PASSAGGIO TOTALE FULL BORE FLANGED BALL VALVE		
 25060 Marcheno(BS)				ENGINEER SIGNATURE	DATE	NAME		TYPE	
				ENGINEERING GROUP LEADER SIGNATURE	DATE	DRAWING NUMBER		REVISION	
					29/10/96	VALVOLA "WAFER" FIRE SAFE		720184	
					29/10/96	DMS 720184 00		G	

ACCORDING TO THE LAW IT IS FORBIDDEN ANY REPRODUCTION