

Botti 65:1 grease pump







PNEUMATIC MOTOR PUMPS

To transfer from drum

Tabella
SBP 014.1
Aprile 2008

Compression ratio **65:1** delivery: **1900** gr/min.

These pumps are dedicated to load tanks with medium/high viscosity grease at a short / long distance and can be installed in centralised lubrication systems.

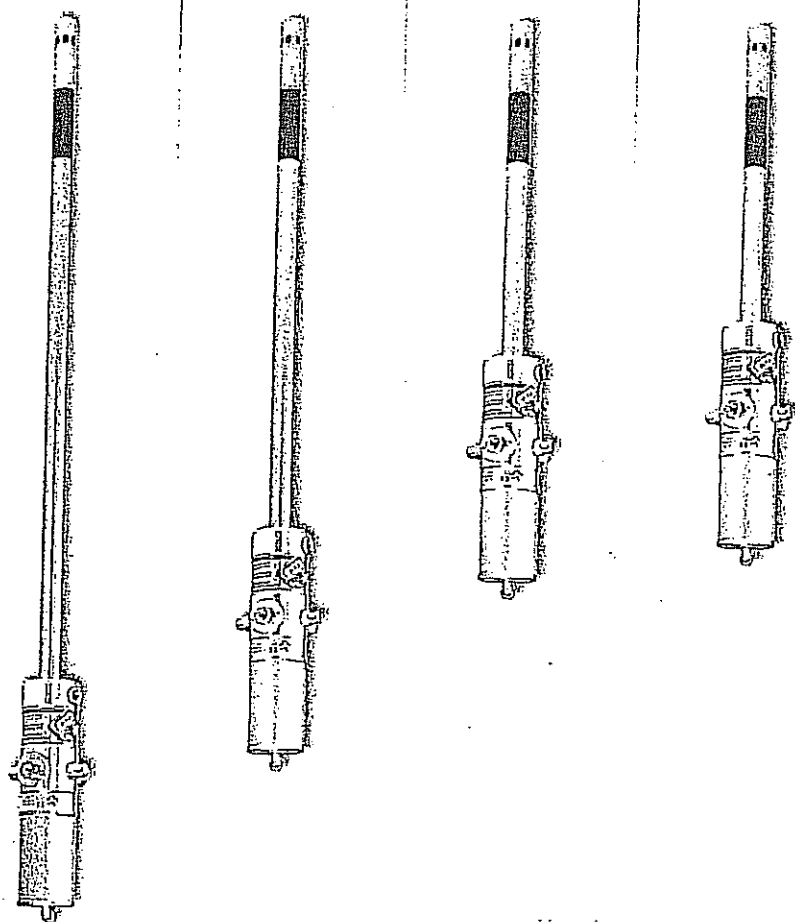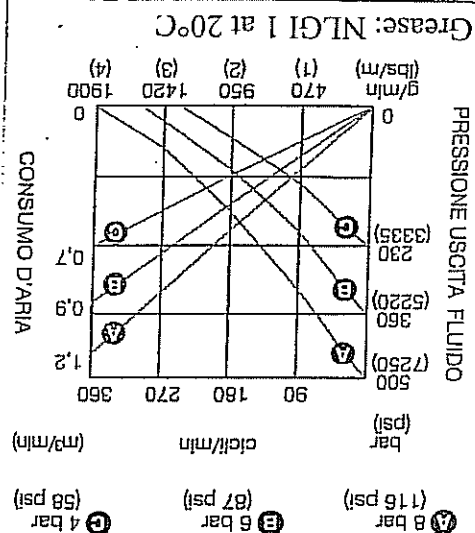

Technical features

Compression ratio	65:1
Air inlet connector	F1/4" G
Grease port connector	F3/8" G
Operating pressure	6-8 bar
Max pressure	8 bar
Average air consumption	440 l/min
Delivery at open port (6 bar)	1900 g/min
noise	81 dB
Suitable for barrels	16 - 20 Kg
Suction lift	410 mm
Suction dia.	30 mm

65:1	F1/4" G	F3/8" G	6-8 bar	8 bar	440 l/min	1900 g/min	81 dB	16 - 20 Kg	410 mm	30 mm	N° 1 packing m ³ 0,010 kg 5,9
65:1	F1/4" G	F3/8" G	6-8 bar	8 bar	440 l/min	1900 g/min	81 dB	20 - 30 Kg	480 mm	30 mm	N° 1 packing m ³ 0,010 kg 6,1
65:1	F1/4" G	F3/8" G	6-8 bar	8 bar	440 l/min	1900 g/min	81 dB	50 - 60 Kg	740 mm	30 mm	N° 1 packing m ³ 0,020 kg 7,4
65:1	F1/4" G	F3/8" G	6-8 bar	8 bar	440 l/min	1900 g/min	81 dB	180 - 220 Kg	940 mm	30 mm	N° 1 packing m ³ 0,020 kg 8,2

Pumps are fitted with filter at air inlet and at grease inlet. Further they are equipped with double valve to enable a smooth and constant grease flow. These expedients are to prevent any gag due to contaminants.

