


CAM LOGIC®

www.camlogic.it

e-mail camlogic@camlogic.it

LEVEL GAUGES

vast range, long-lasting

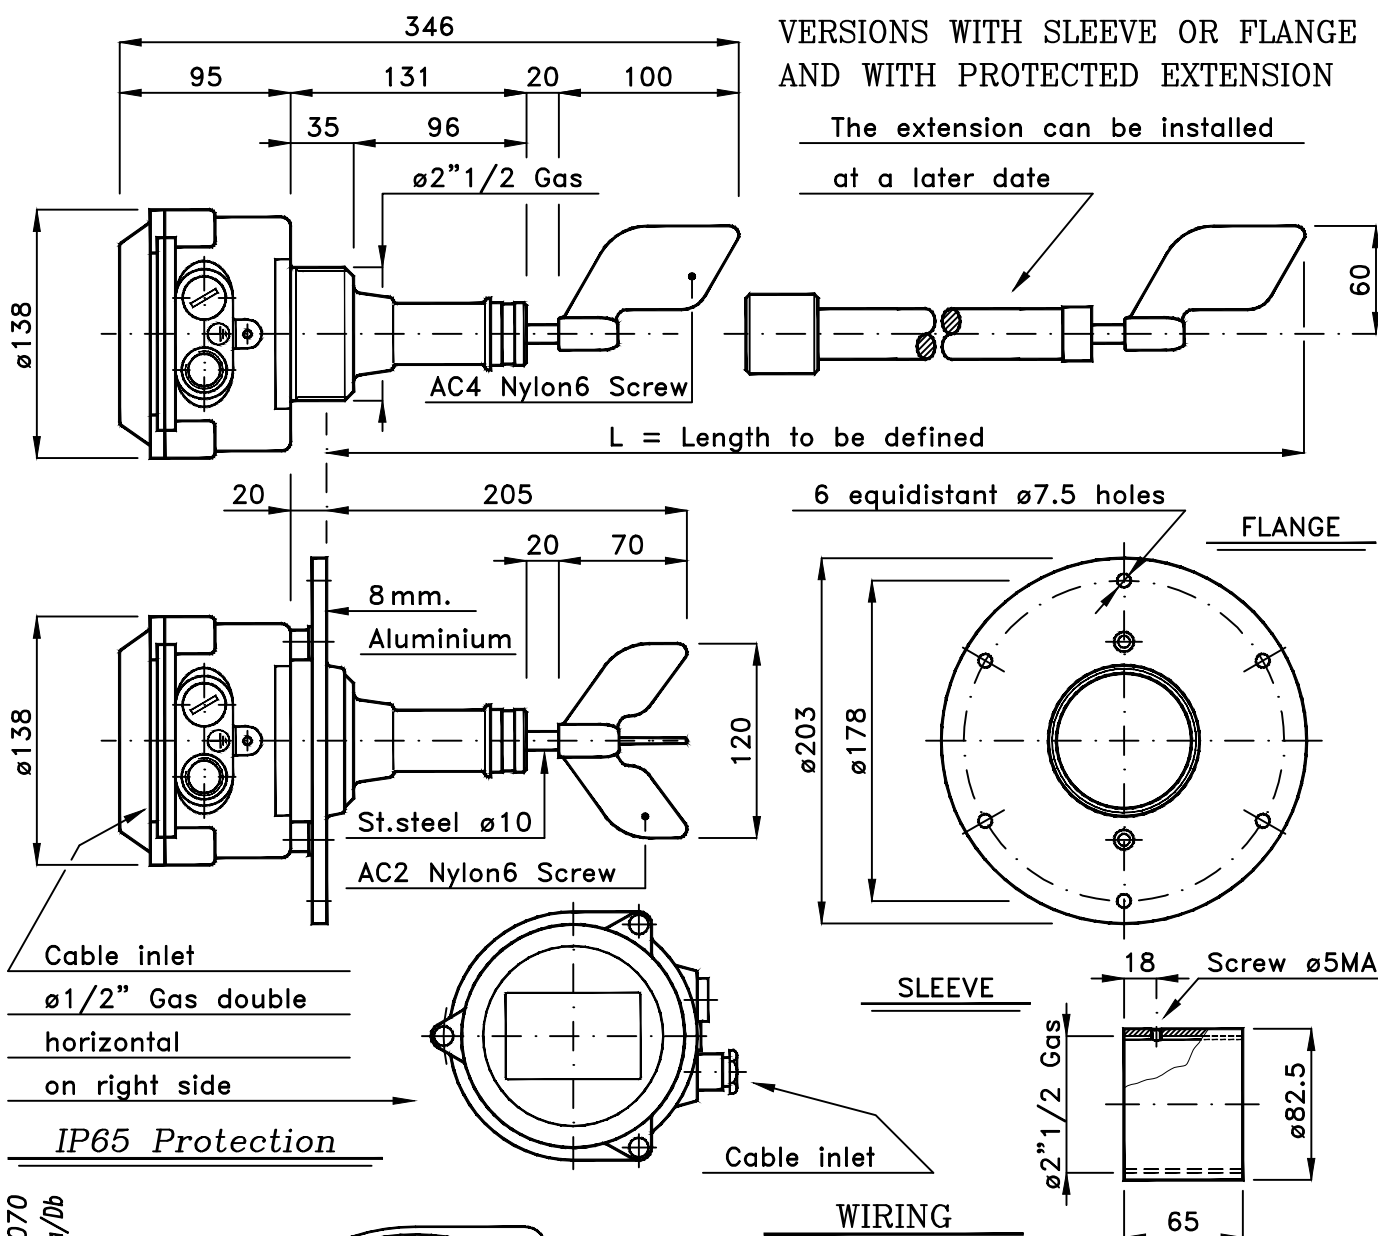

WIRING

- 1 - Common power supply
- 2 - Power supply 110 Va.c. 50/60 Hz
- 3 - Power supply 220 Va.c. 50/60 Hz
- 6 - NC contact 10A/250 Va.c.
- 7 - Common contacts
- 8 - NO contact 10A/250 Va.c.


Ambient temperature range -20 to +70 °C

Weight : PFG-05 1.700 Kg - PFG-05/F 2.200 Kg

On request power supply at 24/48 Va.c. 50/60 Hz or power supply at 24 Vd.c.

Electric motor draw 4 W

Maximum operational pressure 1.1 bar

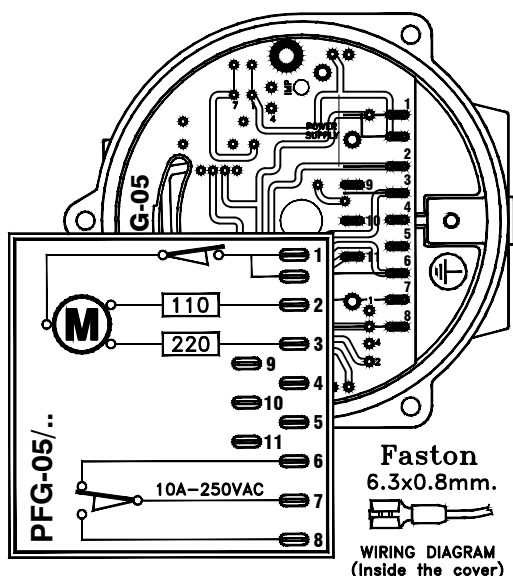

PFG-05 = with 2"1/2 Gas thread - PFG-05/F = with flange

Certificate number TÜV IT 13 ATEX 070
Marking: Ex II 1/2 D Ex ta/ib IIC T85°C IP65 Da/Db



BLADED LEVEL GAUGE PFG-05 | D3802

Rev. 00