



FLOW CHART at 6 bar - UR 2/25

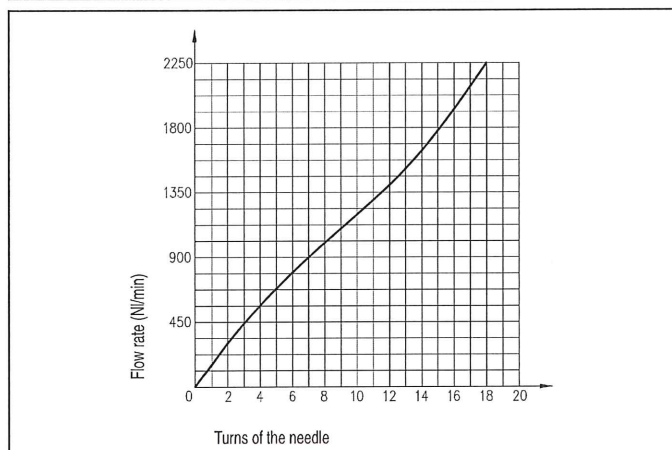

DIMENSIONS AND WEIGHTS URG - URF

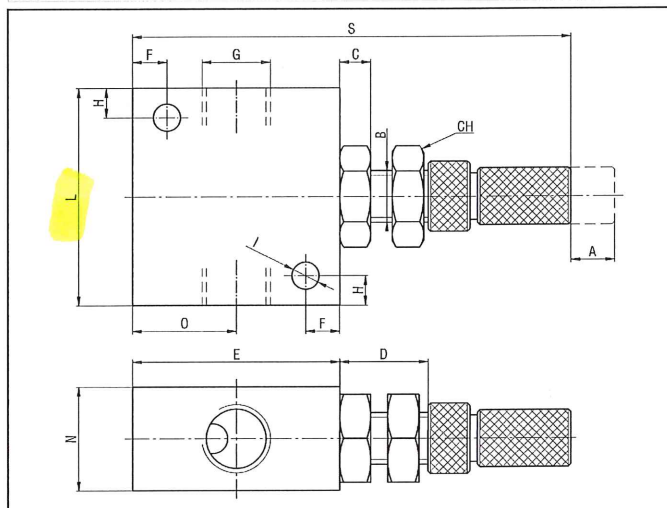

3

Symbol	Nominal diameter (mm)	Port size	TYPE
	0,9	G 1/8	URG8/1
	2	G 1/8	URG8/2
	5	G 1/8	URG8/5
	7,2	G 1/4	URG4/10
	12	G 1/2	URG2/25
	0,9	G 1/8	URF8/1
	2	G 1/8	URF8/2
	5	G 1/8	URF8/5
	7,2	G 1/4	URF4/10
	12	G 1/2	URF2/25

A	B	C	CH	D	E	F	H	I	L	N	O	S	Weight (g)	G
6	M12x0,75	4	14	12,5	31	4,5	5,5	4,3	34	16	15,5	65	60	G 1/8
8,5	M15x0,75	5,5	17	17	40	6,5	6	5,25	42	20	20	84,5	120	G 1/4
13	M25x1,5	7	30	22	65	8,5	12,5	6,25	69	35	32,5	127	540	G 1/2

SILENCED EXHAUST FLOW REGULATORS TYPE URS


TECHNICAL DATA

Maximum pressure	12 bar
Working temperature	0 ÷ +80 °C (-20 °C with dry air)
Medium	Filtered, unlubricated or continuous lubricated compressed air
Port size	G 1/8 - G 1/4 - G 3/8 - G 1/2

MATERIALS

Body	Brass
Silencer	Sintered bronze

DIMENSIONS AND WEIGHTS - URS

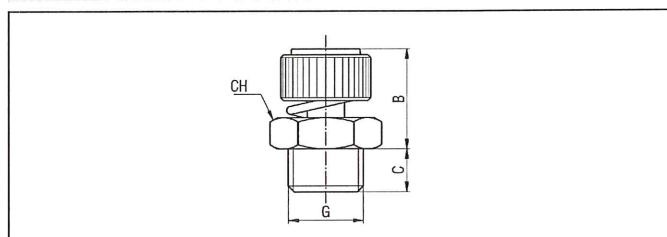

Symbol	B	C	CH	Weight (g)	G	TYPE
	15,5	6	12	15	G 1/8	URS8/3
	17,5	8	16	25	G 1/4	URS4/5
	20	9	20	40	G 3/8	URS3/7
	22,5	10,5	26	70	G 1/2	URS2/9