



Latches with
fold-away knob





- **Material**
Rotor, stator, fold-away knob, closing lever and nut (M22x1.5) in glass-fibre reinforced polyamide based (PA) technopolymer certified self-extinguish UL-94 V0. Resistant to solvents, oils, greases and other chemical agents.
- **Colour**
Black, matte finish.
- **Packing ring**
SBR rubber.
- **Internal toothed washer**
AISI 304 stainless steel
- **Self-tapping screw**
AISI 304 stainless steel
- **Rotation**
90°.
- **IP protection**
IP 65 protection class, according to IEC 529

Technical data
The "V0" certification in accordance with UL-94 V (Underwriters Laboratories) (see Technical data) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.

Special executions on request
Closing lever with I2 ledge in other dimensions.



Drilling template

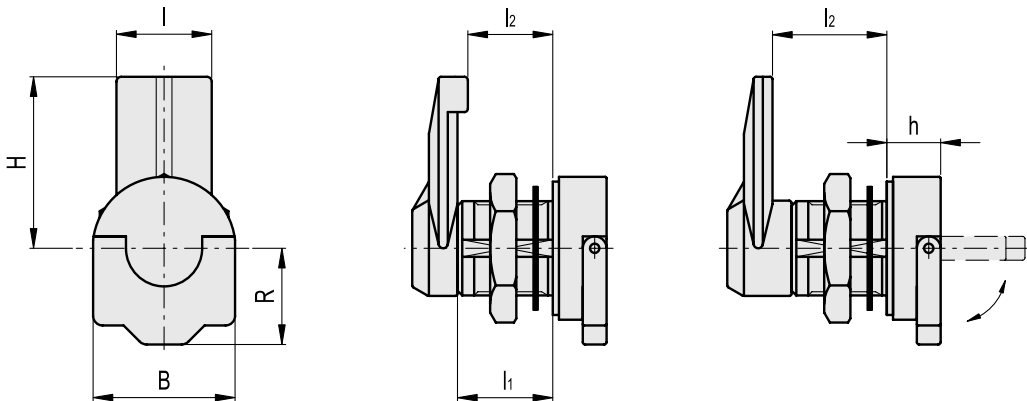

Code	Description	H	B	R	I	l ₁	l ₂	h	
421243	CMT.32-18 AE-V0	32	30	20	20	20	18	11	27
421241	CMT.32-20 AE-V0	32	30	20	20	20	20	11	26
421245	CMT.32-24 AE-V0	32	30	20	20	20	24	11	28
421247	CMT.32-32 AE-V0	32	30	20	20	20	32	11	30