


AIRAX gasdruckfedern typ 6/15 - 8/20 - 10/22

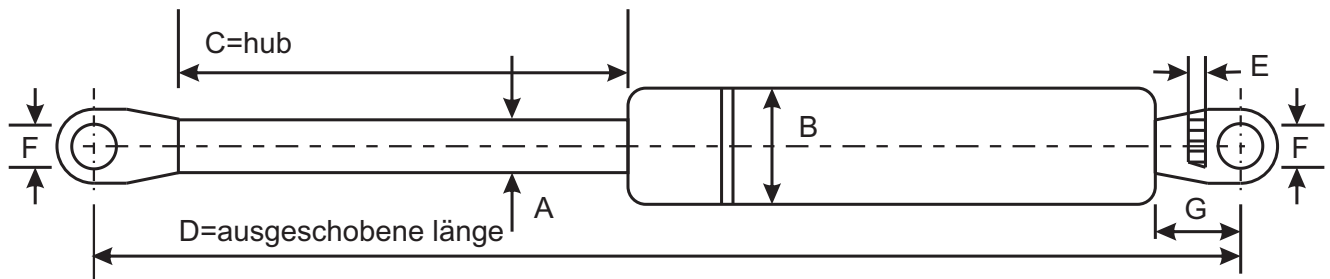

Bestellnummer	Typ	A	B	C	D	E	F	G	Lieferbare Ausschubkraft F1 von/bis
563.500	6/15	6	15	20	94	3	6,5	13	25-400 Newton
563.501				40	145				25-400 Newton
563.502				60	185				25-400 Newton
563.503				80	225				25-400 Newton
563.504				100	265				25-400 Newton
563.505				120	305				25-400 Newton
563.506				150	365				25-350 Newton
588.581	8/20	8	20	60	185	3	6,5	13	100-750 Newton
588.530	8/20	8	20	60	205	5	8,5	14	100-750 Newton
588.510				70	225				100-750 Newton
588.531				80	245				100-750 Newton
588.532				100	285				100-750 Newton
588.533				120	325				100-750 Newton
588.534				140	365				100-750 Newton
588.535				160	405				100-750 Newton
588.536				180	445				100-750 Newton
588.537				200	485				100-700 Newton
588.538				220	525				100-650 Newton
588.539				250	585				100-600 Newton
588.559				300	685				100-550 Newton
588.502				450	985				100-500 Newton
512.520	10/22	10	22	100	285	5	8,5	14	150-1150 Newton
512.521				150	385				150-1150 Newton
512.522				200	485				150-1100 Newton
512.523				250	585				150-1075 Newton
512.524				300	685				150-1050 Newton
512.525				350	785				150-1000 Newton
512.526				400	885				150-0900 Newton

F1 = die ausschubkraft gemessen bei 5 mm eingeschobener kolbenstange.