

YOUR WISHES ARE OUR BENCHMARK






Cables Cable protectors

Catalogue



Cables

Pages 3-7

LEUCHTFLEX	EXTREMFLEX PUR	PROFLEXX H07	THERMFLEX	EXTREMTHERM
				
Page 3	Page 4	Page 5	Page 6	Page 7




Device connecting cables / extensions

Pages 8-10

LEUCHTFLEX	EXTREMFLEX PUR	PROFLEXX H07	Extension PROFLEXX 07	PROFLEXX 07 extension PRCD-S
				
Page 8	Page 8	Page 8	Page 9	Page 10







Specialist cables

Pages 11-12

KRANFLEX	WENDEFLEX PUR	POTIFLEX
		
Page 11	Page 11	Page 12

Cable protectors

Pages 13-16

Overview Cable protectors	MINI	SLIM	SMART	MIDI	PROTECT
					
Page 13	Page 14	Page 15	Page 15	Page 16	Page 16

Cable protectors / practical examples

Pages 17-18

MAXI	MEGA	Practical exam- ples
		
Page 17	Page 17	Page 18

LEUCHTFLEX



The GIFAS LEUCHTFLEX is ideal for connecting lighter electrical equipment with medium mechanical stresses. This polyvinyl chloride-insulated flexible cable satisfies tough demands in relation to mechanical and chemical stresses.

Product properties

- Silicon-free cable
- Polyvinyl chloride insulated
- Above-average flexibility under normal conditions
- Compliant with DIN VDE 0281-1, HD 21.5.S3
- Cu wire cable structure compliant with DIN VDE 0295 Class 5, IEC 228 Cl. 5
- Conductor identification compliant with DIN VDE 0293

Technical data

Cable type:	H05 VV-F
Operating voltage U_0/U :	300/500V
Test voltage:	3000V/50Hz
Temperature range	
- mobile:	-15°C to +70°C
- fixed:	-30°C to +70°C
Sheath colour:	yellow

Areas of application

- Equipment, machine industry
- Mechanical workshops
- Transport (e.g. railways)
- Building sites
- Agriculture
- Food industry
- Municipal companies

Article No.	Conductor No. x cross-section in mm ²	Cable Wire No. in mm	Cable external diameter Diam. in mm	Weight kg/km	Conductor identification	Minimum order quantity in m
102732	2x1.0	32x0.20	6.8	60	blue, brown,	
102743	2x1.5	30x0.25	7.4	100	blue, brown,	
102785	2x 2.5	51x0.25	9.2	130	blue, brown,	100
102842	3x 0.75	24x0.20	5.9	66	green-yellow, blue, brown	
102850	3x1.0	32x0.20	7.2	70	green-yellow, blue, brown	
102860	3x1.5	30x0.25	7.8	110	green-yellow, blue, brown	
102886	3x2.5	51x0.25	9.8	150	green-yellow, blue, brown	500
102911	4x0.75	24x0.20	6.9	79	green-yellow, brown, black, grey	
102925	4x1.5	30x0.20	8.8	125	green-yellow, brown, black, grey	
102946	4x2.5	51x0.25	10.9	210	green-yellow, brown, black, grey	500
102962	5x0.75	24x0.20	7.5	100	green-yellow, blue, brown, black, grey	
102978	5x1.5	30x0.25	9.6	145	green-yellow, blue, brown, black, grey	
102999	5x2.5	51x0.25	12.0	230	green-yellow, blue, brown, black, grey	

Other designs available upon request.

The cable can optionally be printed with your company name.

EXTREMFLEX PUR



GIFAS EXTREMFLEX PUR is intended for use in dry, moist and wet environments. This PUR-sheathed heavy current cable satisfies increased or above-average demands. It is suitable for the connection of commercial and industrial equipment or tools such as drilling machines and sanders.

Product properties

- Silicon and halogen-free cable
- Particularly resistant to impacts as well as being wear and cut-resistant
- Resistant to microbes, UV rays, oils, greases, petrol, water and weathering
- Compliant with DIN VDE 0282 Part 10, HD 22.10.S1
- Cu wire cable structure compliant with DIN VDE 0295 Class 6, IEC 228 Cl. 6
- Conductor identification compliant with DIN VDE 0293

Technical data

Cable type: H05 BQ-F, H07 BQ-F (from 1.5 mm²)
 Operating voltage U₀/U: 300/500V (H05)
 450/750V (H07)
 Test voltage: 2000V/50Hz (H05)
 2500V/50Hz (H07)

Temperature range
 - mobile: - 25°C to +80°C
 - fixed: -40°C to +90°C
 Sheath colour: yellow

Areas of application

- Industry
- Shipyards
- Transportable motors or machines on construction sites

Article No.	Conductor No. x cross-section in mm ²	Cable Wire No. in mm	Cable external diameter Diam. in mm	Weight kg/km	Conductor identification
102740	2x1.0	56x0.15	6.9	59	blue, brown
102751	2x1.5	84x0.15	8.5	89	blue, brown
102859	3x1.0	56x0.15	7.3	73	green-yellow, blue, brown
102876	3x1.5	86x0.15	9.0	109	green-yellow, blue, brown
102897	3x2.5	140x0.15	10.5	159	green-yellow, blue, brown
102937	4x1.5	84x0.15	9.8	137	green-yellow, brown, black, grey
102991	5x1.5	84x0.15	10.8	171	green-yellow, blue, brown, black, grey
103011	5x2.5	140x0.15	13.1	250	green-yellow, blue, brown, black, grey
206485	5x4.0	224x0.15	15.5	406	green-yellow, blue, brown, black, grey
206486	5x6.0	192x0.20	16.9	536	green-yellow, blue, brown, black, grey

The cable can optionally be printed with your company name.

PROFLEXX H07


GIFAS PROFLEXX H07 is intended for use in dry, moist and wet spaces or for outdoors use, such as for the connection of equipment in industrial workshops or workshops at risk of fire. In the case of protected, permanent installations, these cables can be operated with a maximum of 1000 V alternating current or 750 V direct current to earth.

Product properties

- Outer sheath made from highly mechanically stable polychloroprene
- Silicon-free cable
- High flexibility, excellent weather, ozone, oil and alkali resistance
- High thermal load capacity
- This type of cable is approved in compliance with DIN VDE 0165 in workshops at risk of explosion.
- Compliant with DIN VDE 0282-4, HD 22.4.S3
- Cu wire cable structure compliant with DIN VDE 0295 Class 5, IEC 228 Cl. 5
- Conductor identification compliant with DIN VDE 0293

Technical data

Cable type:	H07 RN-F
Operating voltage U_0/U :	450/750V
Test voltage:	2500V/50Hz
Temperature range	
- mobile:	-25°C to +60°C
- fixed:	-40°C to +60°C
- short-term:	up to +250°C
Max. core temperature:	in operation +85°C (standard +60°C)
Sheath colour:	yellow

Areas of application

- Building sites
- Industry
- Shipyards
- Mobile electrical tools, motors and machinery

Article No.	Conductor No. x cross-section in mm ²	Cable Wire No. in mm	Cable external diameter Diam. in mm	Weight kg/km	Conductor identification
112733	2x1.0	32x0.20	8.4	94	blue, brown
102745	2x1.5	30x0.25	9.5	120	blue, brown
110623	2x2.5	50x0.25	11.0	175	blue, brown
102863	3x1.5	30x0.25	10.1	150	green-yellow, blue, brown
102888	3x2.5	50x0.25	12.0	215	green-yellow, blue, brown
102927	4x1.5	30x0.25	11.2	190	green-yellow, brown, black, grey
128372	4x2.5	50x0.25	13.3	270	green-yellow, brown, black, grey
102980	5x1.5	30x0.25	12.3	230	green-yellow, blue, brown, black, grey
103001	5x2.5	50x0.25	14.5	325	green-yellow, blue, brown, black, grey
123840	5x4.0	56x0.30	16.9	475	green-yellow, blue, brown, black, grey
103029	5x6.0	84x0.30	18.8	630	green-yellow, blue, brown, black, grey
102997	5x16.0	128x0.40	27.6	1530	green-yellow, blue, brown, black, grey

The cable can optionally be printed with your company name.

THERMFLEX



This GIFAS THERMAFLEX is intended for use in dry and moist areas with moderate mechanical stresses. It serves as a connecting cable for control devices on tool equipment, conveyor systems, production lines, etc.

Product properties

- Halogen and silicon-free cable
- Exterior sheath made from cross-linked polymer, compliant with DIN VDE 0266, HXM 1
- Flame-retardant, oil-resistant
- Excellent resistance to chemical influences from ozone, mineral oils, diluted acids and alkalis
- High mechanical stability guarantees a long service life
- Modelled on DIN VDE 0281-13 and DIN VDE 0282-9
- Cu wire cable structure compliant with DIN VDE 0295 Class 5, IEC 228 Cl. 5
- Conductor identification compliant with DIN VDE 0293

Technical data

Cable type:	(N) HXSLHXÖ-J
Operating voltage U_0/U :	300/500V
Test voltage:	2000V/50Hz
Temperature range	
- mobile:	-25°C to +100°C
- fixed:	-40°C to +100°C
Sheath colour:	orange

Areas of application

- Chemical industry
- Pharmaceutical industry
- Paper industry
- Automotive industry

Article No.	Conductor No. x cross-section in mm ²	Cable Wire No. in mm	Cable external diameter Diam. in mm	Weight kg/km	Conductor identification
102731	2x0.75	24x0.20	5.6	83	1-2 numbered
102750	2x1.5	30x0.25	6.4	119	1-2 numbered
102848	3x0.75	24x0.20	5.9	100	1-2 numbered, green-yellow
102873	3x1.5	30x0.25	6.8	129	1-2 numbered, green-yellow
102894	3x2.5	51x0.25	8.3	197	1-2 numbered, green-yellow
102934	4x1.5	30x0.25	7.6	154	1-3 numbered, green-yellow
102952	4x2.5	51x0.25	9.2	237	1-3 numbered, green-yellow
102967	5x0.75	24x0.20	7.2	143	1-4 numbered, green-yellow
102988	5x1.5	30x0.25	8.3	198	1-4 numbered, green-yellow
103008	5x2.5	51x0.25	10.1	289	1-4 numbered, green-yellow
103064	7x1.5	30x0.25	10.0	274	1-6 numbered, green-yellow

EXTREMOTHERM


This GIFAS EXTREMOTHERM hose cable is extremely resistant to concentrated organic and inorganic acids and alkalis, salts, solvents and various halogens and gases.

Product properties

- Fluoropolymer insulated
- Extremely heat-resistant
- Nickel-plated Cu conducting wires
- High thermal and chemical stability
- Cu conducting wire structure compliant with DIN VDE 0295 Class 5, IEC 228 Cl. 5
- Conductor identification compliant with DIN VDE 0293

Technical data

Operating voltage U_0/U :	600 V
Test voltage:	2000V/50Hz
Temperature range	
- constant:	-190°C to +260°C
- short-term:	up to +300°C
Sheath colour:	red

Areas of application

- Chemical industry
- Oil, gas industry
- Pharmaceutical and cosmetic industry
- Power plants
- Other industrial systems

Article No.	Conductor No. x cross-section in mm ²	Cable Wire No. in mm	Cable external diameter Diam. in mm	Weight kg/km	Conductor identification
203024	3x1.5	30x0.25	5.8	100	green-yellow, blue, brown

Other cross-sections and lengths available upon request.

LEUCHTFLEX / EXTREMFLEX PUR



Product properties

- Vulcanised contour plug on 2-wire cable
- Vulcanised protective contact plug on 3-wire cable
- Free end stripped, uninsulated and equipped with wire end sleeves

Leuchtflex H05 VV-F

Article No.	Length in m	Conductor No. x Cross-section in mm ²	Plug
100427	3	2x1.0	Contour plug
100431	3	2x1.5	Contour plug
100440	3	3x1.5	Protective contact plug
100448	5	2x1.0	Contour plug
100452	5	2x1.5	Contour plug
100459	5	3x1.5	Protective contact plug
100410	10	2x1.0	Contour plug
100412	10	2x1.5	Contour plug
100414	10	3x1.5	Protective contact plug

Extremflex H05 BQ-F or from 1.5m m² H07 BQ-F

Article No.	Length in m	Conductor No. x cross-section in mm ²	Plug
206919	3	2x1.0	Contour plug
207609	3	2x1.5	Contour plug
206918	3	3x1.5	Protective contact plug
203681	5	2x1.0	Contour plug
203684	5	2x1.5	Contour plug
211890	5	3x1.0	Protective contact plug
203688	5	3x1.5	Protective contact plug
203682	10	2x1.0	Contour plug
203686	10	2x1.5	Contour plug
203689	10	3x1.5	Protective contact plug

PROFLEX H07



Product properties

- Vulcanised contour plug on 2-wire cable
- Vulcanised protective contact plug on 3-wire cable
- Moulded CEE plug
- Free end stripped, uninsulated and equipped with wire end sleeves

Proflexx H07 RN-F

Article No.	Length in m	Conductor No. x cross-section in mm ²	Plug
112735	3	2x1.0	Contour plug
100435	3	2x1.5	Contour plug
100444	3	3x1.5	Protective contact plug
133852	4	2x1.0	Contour plug
112737	5	2x1.0	Contour plug
100454	5	2x1.5	Contour plug
100464	5	3x1.5	Protective contact plug
119034	10	2x1.0	Contour plug
115728	10	2x1.5	Contour plug
116195	10	3x1.5	Protective contact plug
206857	3	3x1.5	CEE 3x16A/230V
206892	5	3x1.5	CEE 3x16A/230V

Other cross-sections and lengths available upon request.

PROFLEXX 07 230/400/500V



Cable type: H07 RN-F with moulded-on plug connectors

Areas of application

- Industry
- Assembly plants
- Power plants
- Building sites
- Services
- ESC
- Anywhere that current needs to be distributed safely

Article No.	GIFAS type	Length in m	Conductor No. x Cross-section in mm ²	Plug
258033	111/211/10/4315GG/K	10	3x1.5	Protective contact plug / protective contact connector
269425	111/211/20/4315GG/K	20	3x1.5	Protective contact plug / protective contact connector
113964	111/313/10/4315PROFLEXX H07	10	3x1.5	Protective contact plug / 3-way protective contact connector
112131	111/313/20/4315PROFLEXX H07	20	3x1.5	Protective contact plug / 3-way protective contact connector
120123	301656/57/10/4525PROFLEXX H07	10	5x2.5	CEE 5x16A/400V
113748	301656/57/20/4525PROFLEXX H07	20	5x2.5	CEE 5x16A/400V
107247	303256/57/10/4560PROFLEXX H07	10	5x6.0	CEE 5x32A/400V
114808	303256/57/20/4560PROFLEXX H07	20	5x6.0	CEE 5x32A/400V
112384	306356/57/10/45160PROFLEXX H07	10	5x16.0	CEE 5x63A/400V
102221	306356/57/20/45160PROFLEXX H07	20	5x16.0	CEE 5x63A/400V
259309	501646/47/10/4425H07	10	4x2.5	CEE 4x16A/500V
259312	501646/47/20/4425H07	20	4x2.5	CEE 4x16A/500V
259313	503246/47/10/4460H07	10	4x6.0	CEE 4x32A/500V
244024	503246/47/20/4460H07	20	4x6.0	CEE 4x32A/500V
259315	506346/47/10/44160H07	10	4x16.0	CEE 4x63A/500V
245001	506346/47/20/44160H07	20	4x16.0	CEE 4x63A/500V

Other designs available upon request.

PROFLEXX H07 with residual current protection device PRCD-S



Portable residual current protection device with electronic residual current analysis for optimised personal safety as an in-line device. Any faults caused by faulty consumers result in all-pole cut-off (DIN VDE 0661). In the event of fixed-installation system errors, all possible faults are detected and the PRCD-S cannot be switched on. The PRCD-S detects residual current on the protective conductor, does not interrupt the protective conductor connection, and the residual current can as a result be released via their own, upstream protective devices (RCCB and LS).

Product properties

- Encapsulated design for harsh conditions
- Suitable for direct connection to the electrical device's supply cable (H07 RN-F 3G2, 5 mm²)
- Unaffected by the plug system used
- Large, easy to operate ON and OFF buttons
- Additional visual switch position display
- Undervoltage triggering
- All-pole switching
- Can be installed in cable drums and mobile distributors


Technical data

Rated voltage:	230V/50Hz
Rated current:	16A
Nominal fault current:	10 or 30mA
Ambient temperature:	– 25°C to +40°C based on a daily mean value that does not exceed 35°C
Protection category:	IP 55
Connection cross-section:	1 mm² to 2.5 mm²
Test marks:	GS of the BG/Cologne
Standard / regulations:	DIN VDE 0661 DIN 40040 and DIN EN 60721

Areas of application


- Building sites
- Fire brigade operations
- Workshops
- For all portable electrical equipment

Article No.	Length in m	Number of wires x cross-section in mm²	Plug
246171	2	3x1.5	Protective contact plug / protective contact connector
234890	2	3x1.5	Protective contact plug / protective contact 3-way connector
234891	2	3x1.5	Protective contact angled plug, protective contact connector

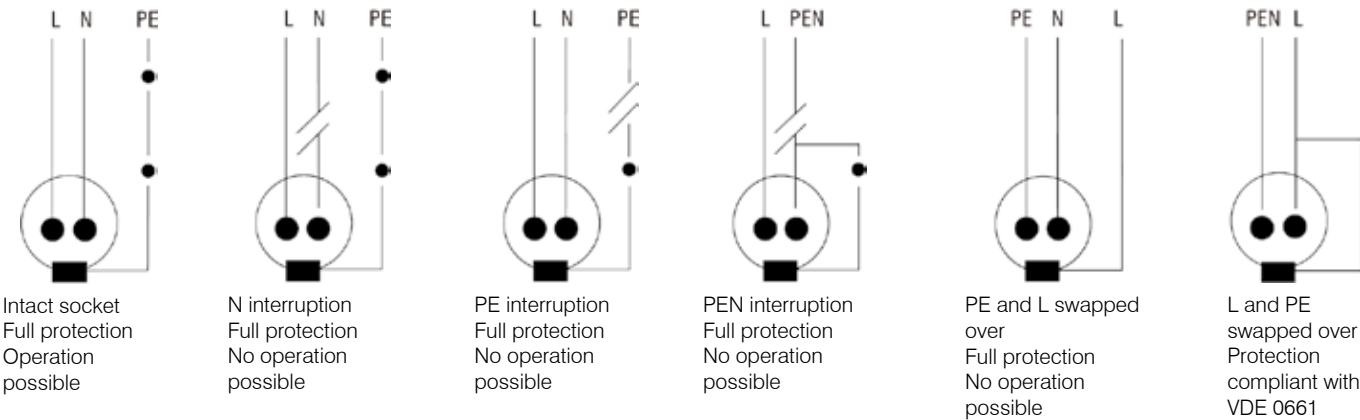

Other designs available upon request.

KRANFLEX

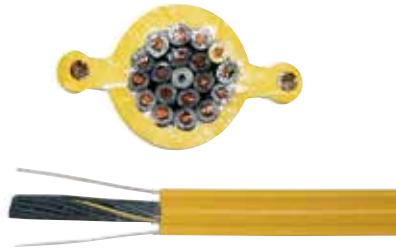

GIFAS KRANFLEX is a special mixture of cold-flexible, weather-resistant PVC acting both as a sheath and as a wire material. The tensile forces that occur are absorbed by two steel cable supporting elements that are arranged in an opposite and axis-parallel manner and which are linked to the exterior sheath.

Product properties

- Crane and lifting equipment control cable based on DIN EN 60811

Technical data

Carrying force:	up to 135 kg
Critical point:	approx. 190 kg
Temperature range:	
- constant	-30° C to +70° C
- defined	-40° C to +70° C
Rated voltage U_0/U :	300/500 V
Test voltage:	3000 V
Wire conductor structure:	DIN VDE 0295, Class 5
Wire ID code:	DIN VDE 0293

Areas of application

- On control lamps
- In converter operation
- As self-supporting shaft cabling
- In high-rack systems
- In cable tracks, etc.

Article No.	Conductor No. x Cross-section in mm ²	Cable external diameter Ø d1 / d2 in mm	Weight in kg/km
102697	12x1.0	14.9 / 27.3	446
102717	18x1.0	17.0 / 32.0	528
102827	25x1.0	21.0 / 36.0	660

WENDEFLEX PUR



The long-lasting return force, even in daily use under difficult conditions, is what makes this spiral cable stand out.

Product properties

- High quality, long service life
- Excellent recoil forces, even in cold climates
- Tested with a million load cycles without failure
- Microbe-resistant, therefore also suitable for refrigerated warehouses

Technical data

Cable type:	H05 BQ-F, H07 BQ-F
Temperature range:	-30°C to +80°C
Rated voltage U_0/U :	300/500V (H05)
(HAR)	450/750V (H07)
Test voltage:	2000V (H05)
	2500 V (H07)
Wire conductor structure:	DIN VDE 0295, Class 5
	IEC 228 Cl.5
Wire ID code:	DIN VDE 0293

Areas of application

- For industrial robots
- Drills, screwdrivers and other hand-held equipment
- High-performance machinery
- Lifting platforms
- Lights

Article No.	Number of wires x cross-section in mm ²	Free ends in mm	Coil length in mm	Extended length in mm
211373	2x1.0	500	800	3000
212040	2x1.0	500	1500	6000
211375	3x1.5	500	800	3000
211774	3x1.5	500	1000	4000
211652	3x1.5	500	1500	6000
211377	5x1.5	500	800	3000
230228	5x1.5	500	1200	4800

Other cross-sections and lengths available upon request.

POTIFLEX



The green/yellow exterior sheath of the highly flexible grounding spiral cable is made from polyether polyurethane and is therefore free of cadmium, CFCs, halogens and silicon. The green-yellow colour provides additional safety. The cable is mainly used for potential equalisation.

Product properties

- Low weight
- Temperature and corrosion-resistant
- Impact resistant in high and low temperature range
- Relatively high compressive stability with low wall thickness
- Seawater-resistant, shatter-proof and impact-resistant, resistant to termites, ozone-resistant
- Extensively resistant to acids, alkalis and solvents
- Oil-resistant exterior sheath compliant with VDE 0472 Part 803

Technical data

Temperature range:	-40°C to 80°C (short-term 100°C)
Voltage:	1000V
Testing alternating voltage:	3500V
Wire structure:	ultra-fine wire, Class 6
Single conductor:	EL Cu 58 F 21 stripped/soft
Conductor resistance:	compliant with DIN VDE 0295, IEC 60228
Coil length:	600 mm
Free ends:	450 mm
Extended length:	5,000 mm

Areas of application

- Measuring and control and laboratory technology
- Chemical industry
- Medicine and electrical engineering
- Automotive industry
- Equipment construction
- Pneumatics and hydraulics
- Food industry

Article No.	Connections	Conductor No. x cross-section in mm²
248523	Free ends	1x6.0
249277	1 ground clamp 1 M8 cable lug	1x6.0
248769	2 ground clamps	1x6.0
248526	Free ends	1x10.0
249154	1 ground clamp 1 M8 cable lug	1x10.0
248773	2 ground clamps	1x10.0
248527	Free ends	1x16.0
249659	1 ground clamp 1 M8 cable lug	1x16.0
248784	2 ground clamps	1x16.0

Overview of range

Protect your cable cross-overs with cable protection systems from GIFAS and avoid accidents and damage. The yellow warning colour on the cover and the structured anti-slip surface provide additional safety. Safety and tidiness, whether it be for temporary or permanent cabling, interior or exterior applications. The hinged cover remains vertical when the cable is inserted and can be quickly and easily closed securely via the integrated Velcro fastening system. The cable protection elements can be connected with each other using tenons. The cable protectors feature the patented, self-cleaning locking hinge.

GIFAS cable protectors comply with standards EN 61537:2007; (IEC 61537:2006) in accordance with the specifications of the 73/23/EEC Directive (Low Voltage Equipment).

Product properties

- For electricity, gas, water, compressed air and hydraulic lines
- Non-slip, temperature-resistant, weathering-resistant, wear-resistant
- Resistant to solvents, petrol, oil, acid and de-icing salt
- Extensions possible with moulded-on or mounted tenons
- Structured non-slip surface
- Self-cleaning locking hinge
- DEKRA-certified - tested product safety

Technical data

Material in lower section: black polyurethane
 Material in upper section: polyethylene in yellow signal colour
 Fire safety class: B2 (compliant with DIN 4102)
 Working range: -30°C to +60°C
 Hardness range: 88 Shore \pm 4A.

Areas of application

- Trade fairs
- Walkways
- Marketplaces
- Christmas markets
- Workshops
- Storage bays
- Shopping centres
- Department stores
- Walkways, etc.


Article No.	Designation	Dimensions Length in mm	Width in mm	Depth in mm		Channel widths in mm	Channel heights in mm	Weight in kg	Tyre load when driven over in t (20x20 cm area)
242930	Cable protector MINI	806	435	37	7	30	30	3.6	
258893	Cable protector MINI lower section	804	241		5	22	22	3.5	
266557	Cable protector SLIM 6 channel	1000	280	32	6	18	18	4	2
262866	Cable protector SMART 3 channel	1000	290	48	3	35	30/35/30	5	2
247921	Cable protector MIDI 5 channel	890	542	52	5	34	36	11.5	5
242122	Cable protector PROTECT 3 channel	1000	605	75	3	35/46/58	50	19	5
256032	Cable protector MAXIMA 5 channel	750	700	90	5	62	55/65/60	21.4	6
256985	Cable protector MEGA 4 channel	700	770	145	4	2x35 2x120	2x50 2x115	26	6

MINI
Upper section



Upper section from above and below

MINI
Lower section

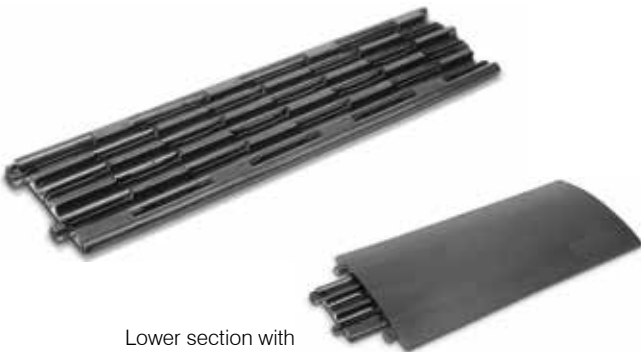

Lower section with upper section

The low-cost version of GIFAS cable protectors. Rows of bumps moulded into the base allow a large number of cables to be laid under the MINI and the weight of vehicles driving over it to be supported. Not suitable for trucks/lorries! Moulded connecting tenons allow quick connections and the tenons cannot be lost afterwards.

Technical data

Material:	black polyurethane
Dimensions (LxWxH):	806x435x37 mm
Channels:	7
Channel width:	28 mm
Channel height:	23-30 mm
Weight:	3.6 kg


The ultimate extension for heavy loads. Our MINI stays true to its line. Easy to handle, quick to lay, low protector heights and now also even with a high load-bearing capacity. The unique MINI lower section connects with the MINI to form a single unit. The reinforced cable protector can withstand even extreme loads. Even forklift trucks and lifting trucks can now drive over these protectors without causing any problems. If several MINIs with a lower section are laid in a line, they remain in a stable row even when driven over by a car.

Technical data


Material:	black polyurethane
Dimensions (LxWxH):	804x241 mm
Channels:	5
Channel width:	22 mm
Channel height:	21 mm
Weight:	3.5 kg

Article No.	Description
242930	MINI cable protector


Article No.	Description
258893	Lower section for MINI cable protector

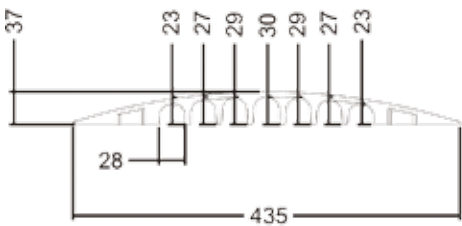

Upper section



Lower section

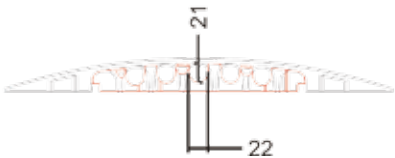

Upper and lower section together

SLIM




The smallest model with the biggest potential. Lightweight, professional, suitable for wheelchairs and universally usable. Equipped with 6 channels, this cable protector meets all the expectations of a professional cable protection system in the smallest possible space.

Technical data

Material in lower section:	black polyurethane
Material in upper section:	yellow polyurethane
Max. load:	approx. 2t/ 400 mm ²
Dimensions (LxWxH):	1000x280x32 mm
Channels:	6
Channel width:	18-19 mm
Channel height:	17 mm
Weight:	4.4 kg

Article No.	Description
266557	SLIM 6-channel cable protector

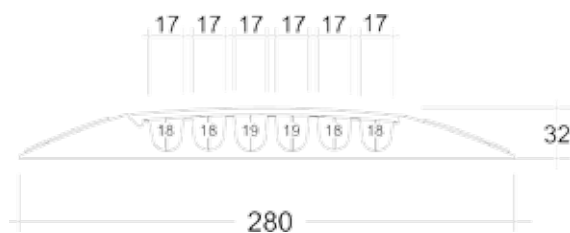

SMART




The dwarf among giants. Lightweight, professional and universally usable. The SMART cable protector satisfies all of the demands made of a professional cable protection system and extends the GIFAS range with a compact, extremely lightweight cable protector that can be driven over in the familiar black/yellow design.

Technical data

Material in lower section:	black polyurethane
Material in upper section:	yellow polyurethane
Max. load:	2t/ 400 mm ²
Dimensions (LxWxH):	1000x290x48 mm
Channels:	3
Channel width:	35 mm
Channel height:	30 mm, 35 mm, 30 mm
Weight:	5 kg

Article No.	Description
262866	SMART 3-channel cable protector

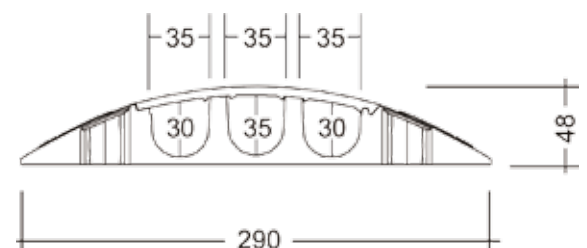

MIDI




The MIDI cable protector has 5 channels, is lower and weighs less than the PROTECT and moulded-on connectors. Its load-bearing capacity is similar to that of PROTECT.

Technical data

Material in lower section: black polyurethane
Material in upper section: yellow polyurethane
Max. load: approx. 5t/ 400mm²
Dimensions (LxWxH): 890x542x52 mm
Channels: 5
Channel width: 34 mm
Channel height: 36 mm
Weight: 11.5 kg

Article No.	Description
247921	MIDI 5-channel cable protector
247924	MIDI end piece incl. separate connecting tenons
247923	45° MIDI elbow

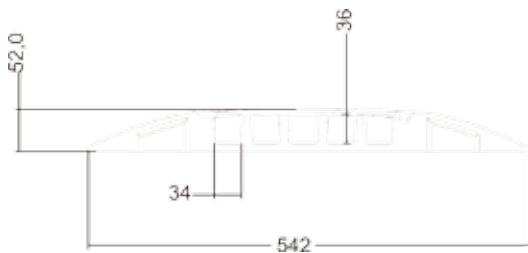


End piece



Elbow 45°C

PROTECT

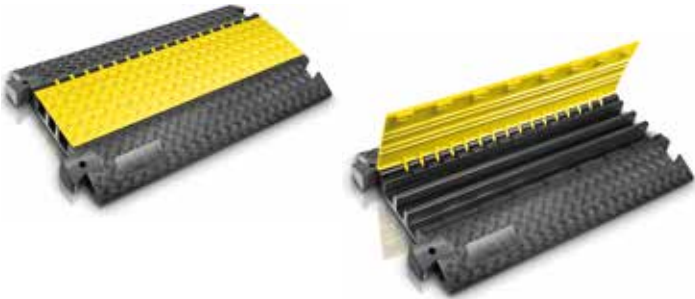


With PROTECT, the individual cable protectors can be connected to each other using screwed-on tenons. Each cable protector is supplied with a pair of pre-mounted connecting tenons. A full range of accessory parts extends the PROTECT range to create a flexible system for protecting expensive cables.

Technical data

Material in lower section: black polyurethane
Material in upper section: yellow polyurethane
Max. load: approx. 5t/ 400mm²
Dimensions (LxWxH): 1000x600x73 mm
Channels: 3
Channel width: 52 mm, 45 mm, 56 mm
Channel height: 49 mm, 50 mm, 49 mm
Weight: 22 kg

Article No.	Description
242122	Cable protector PROTECT 3 channel
242184	PROTECT end piece
249217	45° PROTECT elbow
242183	PROTECT connecting tenons

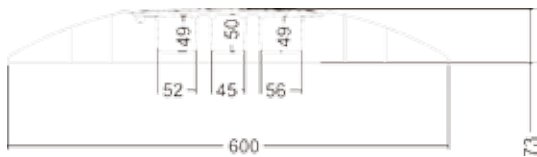


End piece



Elbow 45°C

MAXIMA


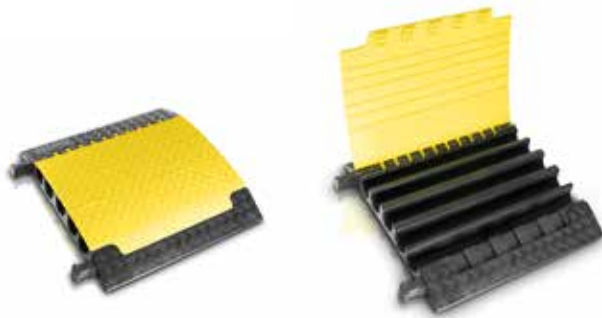


The MAXIMA has 5 over-sized cable channels, 3 of them suitable for C-hose types used by the fire brigade (diameter 62 mm). Heavy current cables are afforded optimum protection too. When used in public traffic situations, please be aware of road traffic acts that are pertinent to your country.

Technical data

Material in lower section:	black polyurethane
Material in upper section:	yellow polyurethane
Max. load:	approx. 6t/ 400 mm ²
Dimensions (LxWxH):	700x696x87 mm
Channels:	5
Channel width:	61 mm, 62 mm, 60 mm, 62 mm, 61 mm
Channel height:	59 mm, 65 mm, 63 mm, 65 mm, 59 mm
Weight:	21.4 kg

Article No.	Description
256032	Cable protector MAXIMA 5 channel
256034	MAXIMA end piece incl. separate connecting tenons

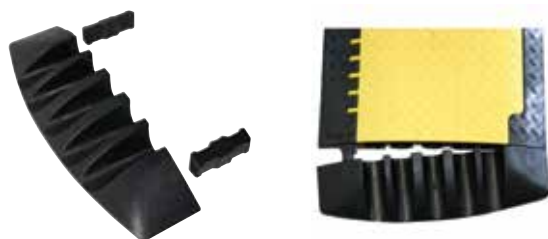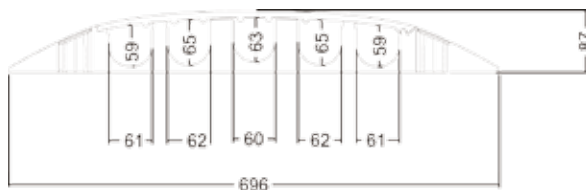

End piece

MEGA




The MEGA was developed for major events. The main features of this heavy-load protector are its oversized cable / hose channels for cables of up to 120 mm (e.g. 2 x A hose), shatter-proof connectors and plug housing not ≥ 100 mm. When used in public traffic situations, please be aware of road traffic acts that are pertinent to your country.


Technical data

Material in lower section:	black polyurethane
Material in upper section:	yellow polyurethane
Max. load:	approx. 6t/ 400 mm ²
Dimensions (LxWxH):	700x783x139 mm
Channels:	2+2
Channel width:	35 mm, 120 mm, 120 mm, 35 mm
Channel height:	50 mm, 115 mm, 115 mm, 50 mm
Weight:	30.5 kg

Article No.	Description
256985	MEGA 4-channel cable protector

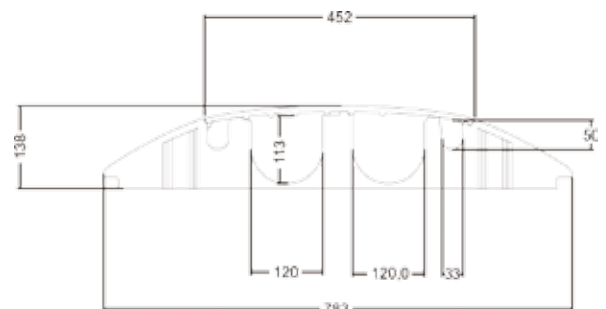

Cables and cable protectors

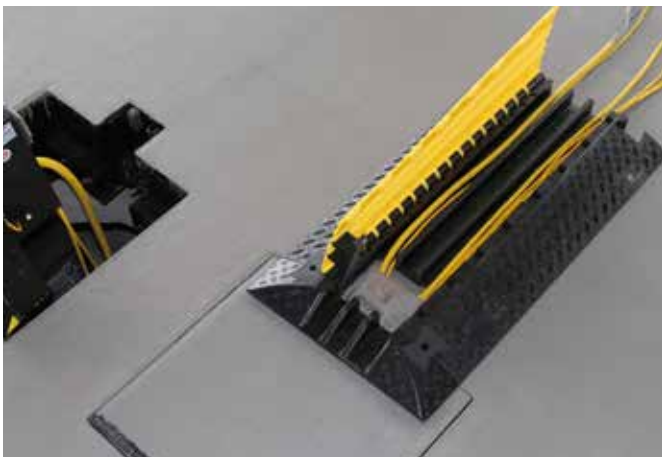

CONTACT US TODAY

New products and specialist solutions, along with the latest product catalogue, can be found on our website.

www.gifas.de

Technical modifications reserved 11/2012



GIFAS
E L E C T R I C

GIFAS ELECTRIC GmbH
Borsigstrasse 9, 41469 Neuss
PO Box 21 03 63, 41429 Neuss
GERMANY

Phone +49 2137 105-0
Fax: +49 2137 105-230
verkauf@gifas.de
www.gifas.de