

BALOGH



189, Rue d'Aubervilliers C.P. 97 75886 PARIS Cedex 18 FRANCE
Tél : 33 (0)1.44.65.65.00 Fax : 33 (0)1.44.65.65.10
<http://www.balogh-group.com>

Board holders

GC xx

IDENTIFICATION SYSTEMS


DESCRIPTION

Cabinet-mount holders intended for accommodation of the press-mount Balogh Eurocard format boards.

The guest board is plugged on an interconnection board which dispatches the signals and power leads on two (GC 01) or three (GC 02 and GC 03) numbered screw blocks.

The board is plugged by manually collapsing a stopper; there is one way to plug it:

- the components side faces block d (GC 02), a (GC 03) or even-numbered block (GC 01),
- the solder side faces blocks b and z (GC 02 and GC 03) or odd-numbered block (GC 01).

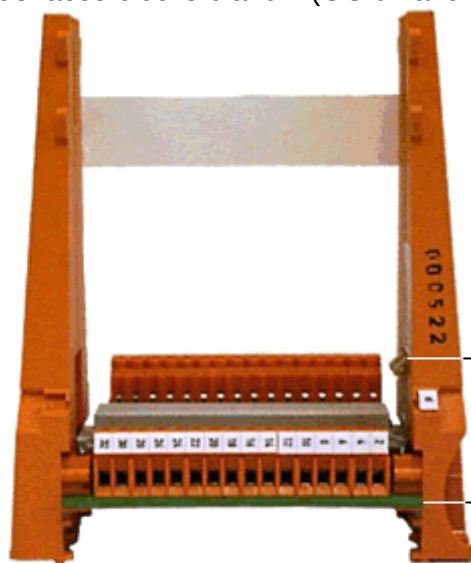

collapsible locking stopper

interconnection board

CHARACTERISTICS

GC	post number	screw blocks	cond. section (mm ²)	overall dim. (mm ²)	guest boards
01	31	even and odd	0.15 ... 2	130 x 45	CEL 81, CELA 81 CLF 81, CLL 81 CELS 91
02	48	d, b and z	0.15 ... 1.3	130 x 56	CEL 95 CELS 45, 94 & 95 CEPR 45 & 96
03	64	a, b and z	0.15 ... 1.3	130 x 77	CEL 98

Height: 140 mm (GC only), 188 ... 200 mm inclusive of guest board.

Footprint: 130 x 45 mm².

Blocks with M 2.5 screws, insulation stripping length: 7 mm.

GC 01

GC 02

GC 03

A GC is fixed using 2 x 3 screws:

