


AUTO-TRANSFORMADORES TRIFÁSICOS

**XRB
SERIES**

STEP UP-DOWN THREE-PHASE AUTOTRANSFORMERS

P. 57

XRB SERIES | 220V / 380V / 480Vac

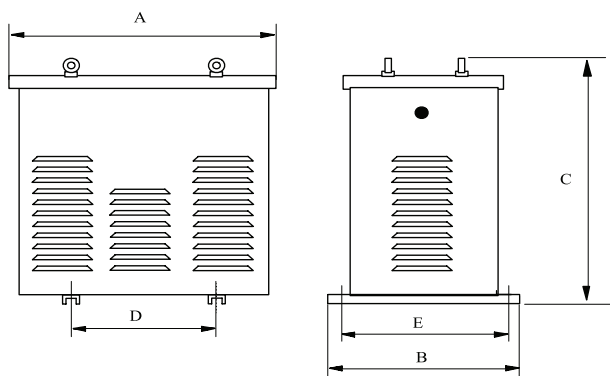

REVERSIBLES VOLTAGES: 220V / 380V / 480Vac

STANDARD: ACCORDING TO EN 61558-2-13
FREQUENCIES: 50 / 60Hz
PROTECTION DEGREE: IP23
PROTECTION CLASS: I
ISOLATION CLASS: T40/F
NON-SHORT-CIRCUIT PROOF

Input and output voltages derive from a common winding (Class H 180°C) without galvanic isolation.

Designed to step up or down the network voltage in order to supply the needed voltage for equipment intended to be associated.

All models are available with protection degree IP00, IP23, IP33 & IP54

TENSIONES REVERSIBLES: 220V / 380V / 480Vac

NORMATIVA: CONFORME A EN 61558-2-13
FRECUENCIAS: 50 / 60Hz
GRADO DE PROTECCIÓN: IP23
CLASE DE PROTECCIÓN: I
CLASE DE AISLAMIENTO: T40/F
NO RESISTENTE A CORTO - CIRCUITOS

Las tensiones de entrada y salida derivan de un bobinado común (Clase H 180°C) sin aislamiento galvánico.

Están diseñados para elevar o reducir la tensión de red con el fin de proveer el voltaje necesario para los equipos a los que están asociados.

Todos los aparatos disponibles en IP00, IP23, IP33 e IP54

Power Potencia (KVA)	Code Código	Dimensions Dimensiones (mm)					Net weight Peso neto (kg)
		A	B	C	D	E	
1	XRB03210283	260	181	243	150	165	7,6
2	XRB03220283	260	181	243	150	165	9
3	XRB03230283	325	280	295	200	250	16,8
5	XRB03250283	325	280	295	200	250	22,5
7,5	XRB03275283	375	300	387	270	270	29
10	XRB03310283	375	300	387	270	270	34
15	XRB03315283	455	310	470	330	290	49
20	XRB03320283	455	310	470	330	290	54
25	XRB03325283	455	310	470	330	290	60
30	XRB03330283	510	400	560	370	345	81
40	XRB03340283	510	430	560	370	380	93
50	XRB03350283	510	430	560	370	380	103
60	XRB03360283	640	490	695	470	430	122
75	XRB03375283	640	490	695	470	430	149
100	XRB03410283	660	520	695	470	460	185
125	XRB03412283	780	580	845	560	515	234
160	XRB03416283	780	630	845	560	564	280
200	XRB03420283	780	630	845	560	564	282

* Any other powers and voltages available on request | * Otras potencias y tensiones bajo demanda