


## StreamLIGHT SL70 Protected tube light

**NEW  
IP68**



End cap with two sealing O-rings

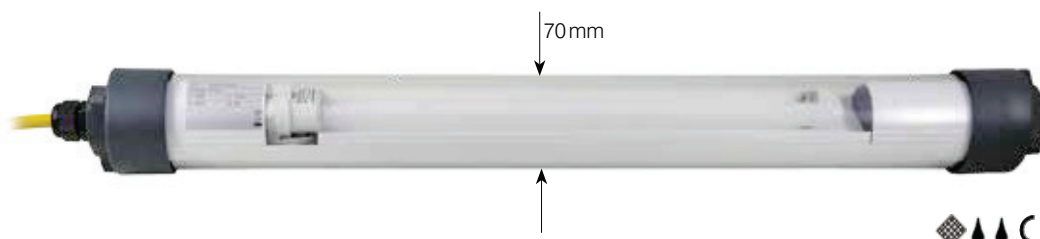

End cap with mounted screw cap

GIFAS has revised its range of protective tube lights completely. In particular, the degree of protection is increased to IP68 and the connection has been massively improved.

The protective tube lights SL70 work thanks to its high protection even under extreme conditions trouble-free and maintenance-free! The standard protected tube lights were developed for mounting on or installation in machinery. They are however also suitable for illuminating switching systems and control consoles. Other areas of use include wet rooms, tunnels, corners, sewers, water reservoirs, etc. We also have a short version especially for small spaces.

### Product properties

- Fluorescent bulb in rod shape or compact fluorescent bulb
- Light body made from shock-resistant Makrolon or borosilicate glass
- Resistant to chemical and mechanical influences
- Sealing cover made from fibreglass-reinforced nylon 66, dust and water tight
- standard: with feed-through wiring and additional internal cable gland\*

### Technical data

Operating voltage:	12/24VDC, 24/42/230VAC
Tube:	makrolon / borosilicate glass
Light colour:	4000K
Temperature range:	-25 to +45 °C
Ballast unit:	EBU built in**
Protection category:	IP68
Protection class:	I / III
Dimensions:	Ø 70mm

\* If the lights are factory-equipped with a connection cable, eliminating the additional cable gland.

\*\* EBU = Electronic ballast unit

Art.No.	Type	Voltage	Output	Length	Illuminant
840047	borosilicate glass	12VDC	18W	750mm	TC-L compact
840046	makrolon	12VDC	18W	750mm	TC-L compact
840064	borosilicate glass	12VDC	36W	925mm	TC-L compact
840056	makrolon	12VDC	36W	925mm	TC-L compact
840049	borosilicate glass	24VDC	18W	750mm	TC-L compact
840048	makrolon	24VDC	18W	750mm	TC-L compact
840067	borosilicate glass	24VDC	36W	925mm	TC-L compact
840066	makrolon	24VDC	36W	925mm	TC-L compact
840051	borosilicate glass	24VAC	18W	750mm	TC-L compact
840050	makrolon	24VAC	18W	750mm	TC-L compact
840070	borosilicate glass	24VAC	36W	925mm	TC-L compact
840069	makrolon	24VAC	36W	925mm	TC-L compact
840055	borosilicate glass	42VAC	18W	750mm	TC-L compact
840052	makrolon	42VAC	18W	750mm	TC-L compact
840080	borosilicate glass	42VAC	36W	925mm	TC-L compact
840079	makrolon	42VAC	36W	925mm	TC-L compact