


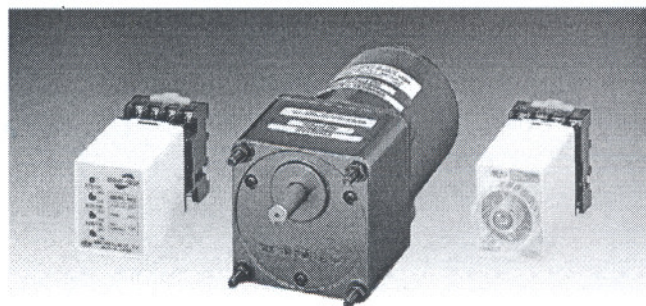

40W

INDUCTION SPEED CONTROL MOTOR

90mm LEAD WIRE TYPE

SPECIFICATION OF SOCKET SR TYPE SPEED CONTROL MOTORS

SIZE mm sq.	Motor Type	Controller Type	Poles	Output (W)	Voltage (V)	Freq. (Hz)	Duty	Speed Range (rpm)	Permissible Torque				Starting Torque		Cap. (μ F)
									at 1200rpm		at 90rpm		(kg-cm)	(N-m)	
90	S9I400A()-S12 S9I400A()-S12(TP) S9I400A()-S12CE	SRA02 SRA02CE	4	40	1 ϕ 110	60	Cont.	90-1700	2.70	0.270	1.00	0.100	2.20	0.220	10.0
	S9I400B()-S12 S9I400B()-S12(TP) S9I400B()-S12CE	SRB02 SRB02CE	4	40	1 ϕ 220	60	Cont.	90-1700	2.70	0.270	1.00	0.100	2.20	0.220	2.5
	S9I400C()-S12 S9I400C()-S12(TP) S9I400C()-S12CE	SRC02 SRC02CE	4	40	1 ϕ 100	50	Cont.	90-1400	2.70	0.270	0.90	0.090	1.80	0.180	10.0
						60		90-1700	2.00	0.200					
	S9I400D()-S12 S9I400D()-S12(TP) S9I400D()-S12CE	SRD02 SRD02CE	4	40	1 ϕ 200	50	Cont.	90-1400	2.70	0.270	0.90	0.090	1.80	0.180	2.5
						60		90-1700	2.00	0.200					
	S9I400X()-S12 S9I400X()-S12CE	SRX02 SRX02CE	4	40	1 ϕ 220	50	Cont.	90-1400	2.50	0.250	0.70	0.070	1.70	0.170	2.0
					1 ϕ 240				3.00	0.300	0.70	0.070	2.10	0.210	

- "CE" marked at the end of motor model name indicates that it is thermally protected type which has received CE (File NO. E9766002E01, Certificate Institute: TÜV Rheinland).
- SR type controller model with "CE" appeared at the end of motor model name indicates that the product acquired CE MARK certification. (File NO. E9766429E01, Certificate Institute: TÜV Rheinland)
- "TP" marked at the end of the motor model name indicates that it is standard motor with Thermal Protector mounted.
- S9I400X-S12, S9I400X-S12CE is thermally protected type with TP mounted.
- () is for marking 'L' type or 'H'. 'L' should be used with gearhead 'L' and 'H' should be used with gearhead 'H'

SPECIFICATION OF SOCKET SS TYPE SPEED CONTROL MOTORS

SIZE mm sq.	Motor Type	Controller Type	Poles	Output (W)	Voltage (V)	Freq. (Hz)	Duty	Speed Range (rpm)	Permissible Torque				Starting Torque		Cap. (μ F)
									at 1200rpm		at 90rpm		(kg-cm)	(N-m)	
90	S9I400A()-S24 S9I400A()-S24(TP) S9I400A()-S24CE	SSA02-SRSS SSA03-SRSS	4	40	1 ϕ 110	60	Cont.	90-1700	2.70	0.270	1.00	0.100	2.20	0.220	10.0
	S9I400B()-S24 S9I400B()-S24(TP) S9I400B()-S24CE	SSB02-SRSS SSB03-SRSS	4	40	1 ϕ 220	60	Cont.	90-1700	2.70	0.270	1.00	0.100	2.20	0.220	2.5
	S9I400C()-S24 S9I400C()-S24(TP) S9I400C()-S24CE	SSC02-SRSS SSC03-SRSS	4	40	1 ϕ 100	50	Cont.	90-1400	2.70	0.270	0.90	0.090	1.80	0.180	10.0
						60		90-1700	2.00	0.200					
	S9I400D()-S24 S9I400D()-S24(TP) S9I400D()-S24CE	SSD02-SRSS SSD03-SRSS	4	40	1 ϕ 200	50	Cont.	90-1400	2.70	0.270	0.90	0.090	1.80	0.180	2.5
						60		90-1700	2.00	0.200					
	S9I400X()-S24 S9I400X()-S24CE	SSX02-SRSS SSX03-SRSS	4	40	1 ϕ 220	50	Cont.	90-1400	2.50	0.250	0.70	0.070	1.70	0.170	2.0
					1 ϕ 240				3.00	0.300	0.70	0.070	2.10	0.210	

- "CE" marked at the end of motor model name indicates that it is thermally protected type which has received CE (File NO. E9766002E01, Certificate Institute: TÜV Rheinland).
- "TP" marked at the end of the motor model name indicates that it is standard motor with Thermal Protector mounted.
- S9I400X-S24, S9I400X-S24CE is thermally protected type with TP mounted.
- () is for marking 'L' type or 'H'. 'L' should be used with gearhead 'L' and 'H' should be used with gearhead 'H'


50Hz

GEAR RATIO		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
MODEL	rpm	500	416	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12	10	8	7.5
	kg-cm	8.3	9.9	13.8	16.5	20.7	24.8	27.5	34.4	41.3	49.6	49.6	62.1	74.5	89.4	99.3	100	100	100	100	100	100	100	100	100
S9KB(B)		Nm	0.813	0.970	1.352	1.617	2.029	2.430	2.695	3.371	4.047	4.861	4.861	6.086	7.301	8.761	9.731	9.800	9.800	9.800	9.800	9.800	9.800	9.800	9.800


60Hz

GEAR RATIO		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
MODEL	rpm	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
	kg-cm	6.8	8.2	11.3	13.6	17.0	20.4	22.7	28.4	34.0	40.8	40.8	51.1	61.3	73.6	81.8	100	100	100	100	100	100	100	100	100
S9KB(B)	Nm	0.666	0.804	1.107	1.333	1.666	1.999	2.225	2.783	3.332	3.998	4.008	5.008	6.007	7.213	8.016	9.800	9.800	9.800	9.800	9.800	9.800	9.800	9.800	9.800


- The code in □ of gearhead model is for gear ratio.
- It is the permissible torque of the assembled motor and gearhead.
- The permissible torque of the assembled with motor and inter-decimal gearhead is 100kg·cm.
- ■ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.
- Rotational speed based on synchronous speed (50Hz:1500rpm, 60Hz:1800rpm) divided by gear ratio. The actual rotation speed is less 2-20% than the displayed value according to the load.

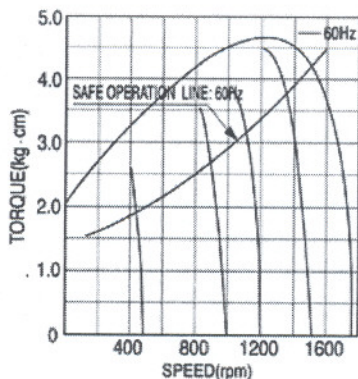

- ▲ S9I40GA(-)-S12 S9I40GA(-)-S24
- S9I40GA(-)-S12(TP) S9I40GA(-)-S24(TP)
- S9I40GA(-)-S12CE S9I40GA(-)-S24CE
- S9I40GB(-)-S12 S9I40GB(-)-S24
- S9I40GB(-)-S12(TP) S9I40GB(-)-S24(TP)
- S9I40GB(-)-S12CE S9I40GB(-)-S24

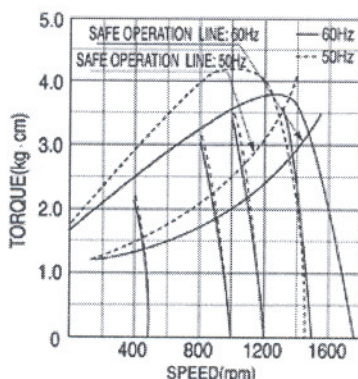

- ▲ S9I40GC(-)-S12 S9I40GC(-)-S24
- S9I40GC(-)-S12(TP) S9I40GC(-)-S24(TP)
- S9I40GC(-)-S12CE S9I40GC(-)-S24CE
- S9I40GD(-)-S12 S9I40GD(-)-S24
- S9I40GD(-)-S12(TP) S9I40GD(-)-S24(TP)
- S9I40GD(-)-S12CE S9I40GD(-)-S24

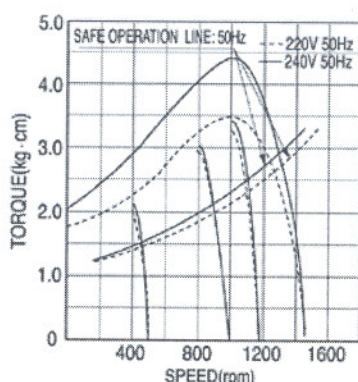

- ▲ S9I40GX(-)-S12 S9I40GX(-)-S24
- S9I40GX(-)-S12CE S9I40GX(-)-S24CE