


LEONI Protec item-no: F07048-17-03

roundcable  
3 x 25,0 mm<sup>2</sup>

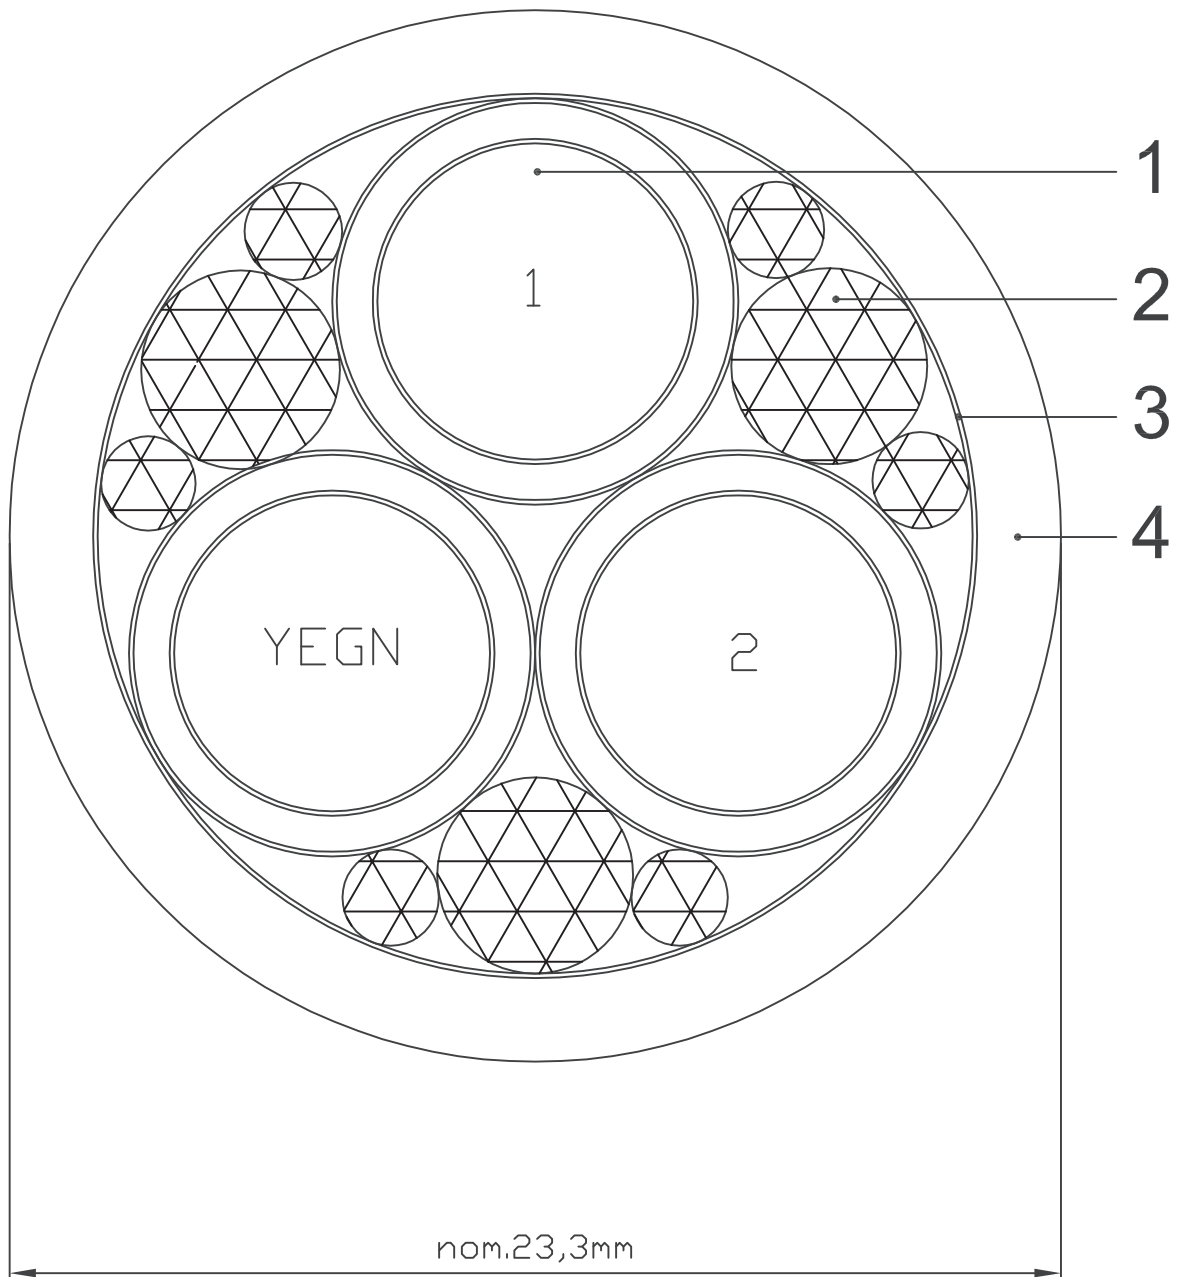

No access may be allowed to either the original or to the copy of this document without our written consent in accordance with §15 and §17 of the (German) Copyright Act.  
In the event of non-compliance we shall reserve the right to assert a claim for damages in accordance with §97 of the (German) Copyright Act as well as to demand prosecution within the meaning of §106 and §108a of the (German) Copyright Act.

LEONI protec item.-Nr.: **F07048-17-03**

<u>pos. 1</u>	3 insulated wires 25,0 mm <sup>2</sup> conductor (3185 x 0,1 mm) bare copper binder polyester – non woven insulation TPE colour black; printed with numbers 1,2, 1x yellow-green binder PTFE
<u>pos. 2</u>	filler
<u>pos. 3</u>	binders PTFE
<u>pos. 4</u>	outer jacket material polyurethane, flame resistant colour black, matt printing blue; <a href="http://www.leoni-robotic-solutions.com">www.leoni-robotic-solutions.com</a> -S- 3x25mm <sup>2</sup> F07048-17-03 production number

technical data:

operating voltage:	750 V
test voltage conductor/conductor:	4000 V/DC
operating temperature:	-40°C to +80°C
weight:	nom. 1056 g/m

bending radius:

fixed installation: 2 x diameter  
minimum bending radius at a continuous flex of: 5 x diameter  
best bending radius at a continuous flex of: 10 x diameter