




2RREu45 250x56R (Inv)

C41-B3

DATA SHEET

release, d - Revision 06-2014





Voltage	Frequency	Absorbed Power	Absorbed Current	Capacitor	Airflow	Rotation speed	Acoustic level	Rotation	Operational Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA	↻	Min/Max
230	50	202	0,88	6,0	1410	2555	76	R	-40°C / +70°C
230	60	285	1,24	6,0	1450	2695	77	R	-40°C / +70°C
230	50				829 CFM				-40°F / 158°F
230	60				853 CFM				-40°F / 158°F

dBA : free blowing

ErP 2013



ErP 2015

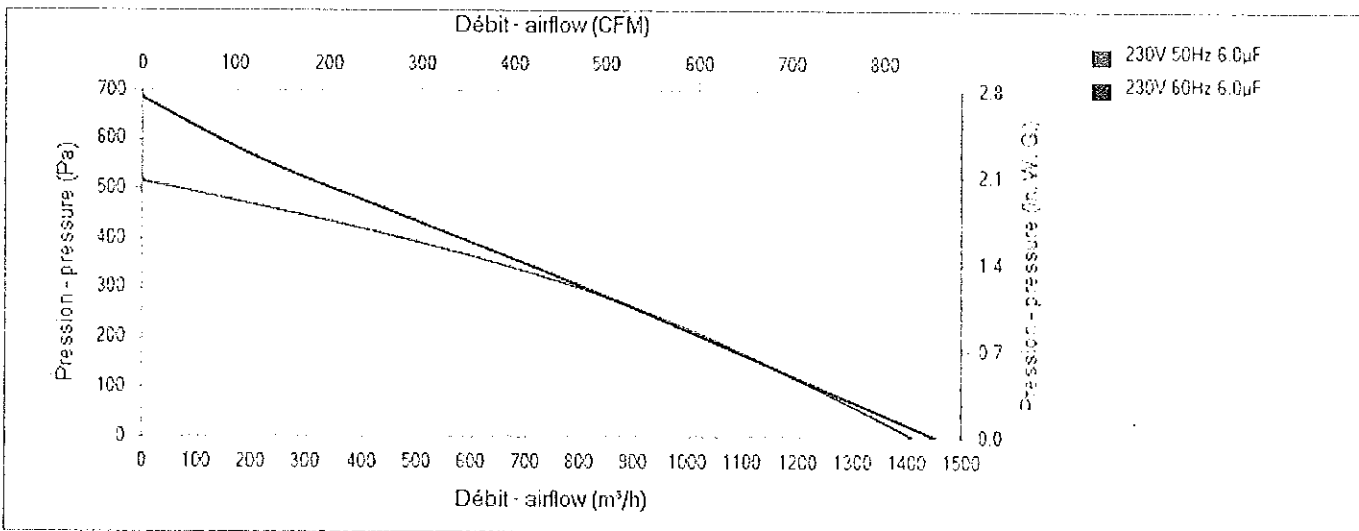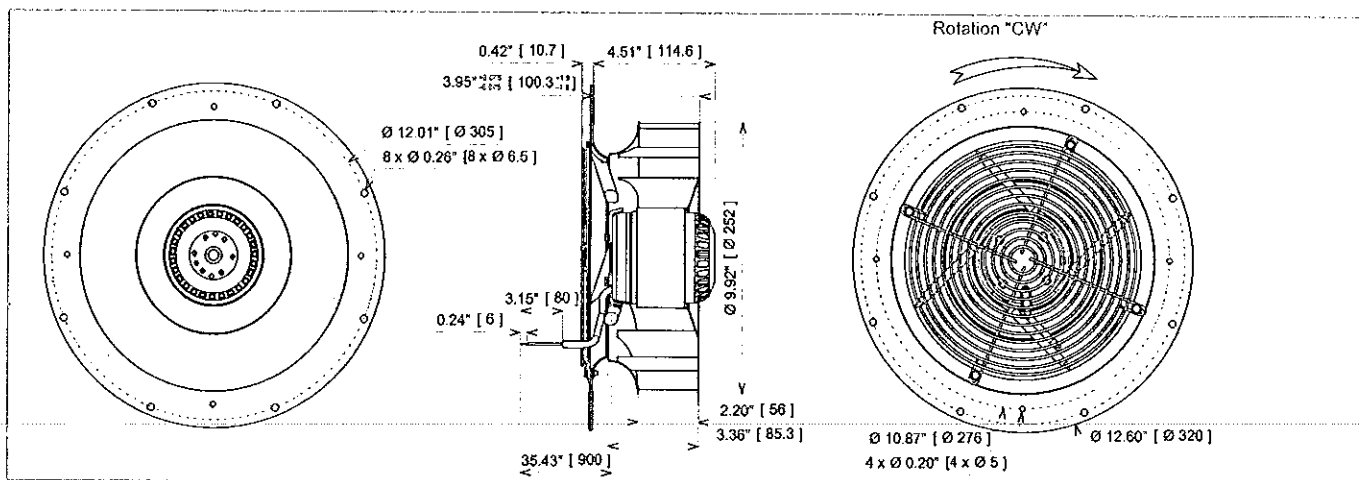

Description

- .Weight : 3,9 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .Galvanized steel impeller
- .Black painted aluminium reversed-inletcone
- .Finger guard
- .UL approved motor

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow

