

PRESSURE TRANSMITTER

Models 570 / 770 / 870



FEATURES

- All Stainless Steel Construction
- Small size - 1.5" diameter
- Exotic wetted materials available
- Watertight/submersible design
- 4-20 mA, 0-5 V, mV/Volt output
- FM, ATEX, CSA, and CE approvals available

TYPICAL APPLICATIONS

- Offshore oil rigs
- Gas compressors
- Paint spraying
- Water treatment
- Natural gas pipelines
- Polyethylene manufacture
- Rolling mills
- Stamping presses

RUGGED CONSTRUCTION

All welded construction and stainless steel surfaces makes the X70 ideal for corrosive environments. The transmitters O-ring free design ensures reliability with corrosive media. Viatran's X70 FM approved labelled units are designed to meet NEC/API Dual Seal

requirements. For most applications requiring field adjustments, Model 571 is also hermetically sealed, with magnetically coupled adjustments to eliminate contamination from liquid or gas intrusion. For the most corrosive environments, Hastelloy, Inconel, and 316 SS wetted parts are available.

OVERPRESSURE PROTECTION

Models 570, 770 and 870 all feature bonded foil strain gage sensors. The over pressure protection in this technology helps to eliminate damage to the sensors when they are exposed to transient pressure spikes. Viatran also offers isolation diaphragms and oil fills for specific application requirements.

PRESSURE MEASUREMENT SOLUTIONS

You'll find complete specifications on the following pages to help you select the right X70 transmitter for your application. Viatran offers a full line of pressure measurement products for the process control industry including a "low power" version of the X70 which draws less than 1 mA of current.

For more information, contact Viatran.



PERFORMANCE

Full Scale Pressure Range0-100 thru 0-100K PSIS (0-6.89 thru 0-6894 bar)

Linearity (Best Fit Straight Line)	0-100 PSI (0-6.89 bar)	±0.5%
	150-10K PSI (10.3-6.89 bar)	±0.2%
	15K-100K PSI (1034-6894 bar)	±0.25%
	Hysteresis	≤0.15% FSO
Full Scale Output (FSO)	Repeatability	≤0.15% FSO
	570	16 mA
	770	5 Vdc
	870	2 mV/V
	Zero and Span Balance	±1% FSO
	Long Term Stability	≤±0.25% FSO per 6 months
	Response Time	<2 mSec to reach 90% FSO
	Temperature Effect on Zero	≤±1% FSO per 100°F (37°C)
	Temperature Effect on Span	≤±1% FSO per 100°F (37°C)
	Compensated Temperature	70°F to 170°F (21°C to 76°C)
	Operating Temperature	-40°F to 190°F (-40°C to 87°C)
	Storage Temperature Limit	-65°F to 250°F (-53°C to 121°C)

ELECTRICAL

Supply Voltage	570/770	12 to 36 Vdc		
	870	10 Vdc nominal, 15 Vdc maximum		
Power Supply Regulation Effect	570/770	≤±0.02% FSO per Volt		
	870	Ratiometric		
Output Signal	570	4 - 20 mA		
	770	0 - 5 Vdc		
	870	2 mV/Volt (Nominal)		
Load Impedance	570	900 Ohms max at 30 Vdc		
	770	100K Ohms minimum		
Bridge Impedance	(All)	5000 Ohms nominal		
Circuit Protection	570/770	Varistor protected across the input leads for surges above 40 V and currents to 250 Amps peak with a pulse width of 20 µSecs. Reverse polarity protected.		
Insulation Resistance	570/770	>200 MegOhms to case ground		
	870	>1000 MegOhms to case ground at 50 Vdc and 70°F (21°C)		
Electrical Connection		1/2" NPT (M), 18 AWG wire, 72"		
	570	770	870	
Red	+Power/Signal	+Power	+Power	
Black	-Power/Signal	+Signal	+Signal	
Green	Case ground	Case ground	-Power	
White		-Power/Signal	-Signal	

MECHANICAL

Pressure Connection	0-50 thru 0-15K PSI	1/4" - 18 NPT Female (0-3.3 thru 0-1034 bar)
	0-20K thru 0-50K PSI	1/4" F250-C High Pressure Tube (0-1378 thru 0-3447 bar)
	0-60K thru 0-100K PSI	5/16" F312C High Pressure Tube (0-4136) thru 0-6894 bar)
Proof Pressure	0-100 thru 0-15K PSI	1.5 times FSPR or 20K PSI (1378 bar), (0-6.8 thru 0-1034 bar) whichever is less
Burst Pressure	0-20K thru 0-100K PSI	1.2 times FSP (0-1378 thru 0-6894 bar)
	0-100 thru 0-15K PSI	≥ 2.3 to 5 times FSPR dependent on (0-6.8 thru 0-10342 bar) sensor
	0-20K thru 0-100K PSI	≥ 1.5 times FSPR or 125K PSI (8618 bar) (0-1378 thru 0-6894 bar) whichever is less
Mounting	Supported by process piping or optional mounting bracket	

MATERIALS OF CONSTRUCTION

Enclosure	0-100 thru 0-15K PSI.....15-5 PH and 316 stainless steel (0-6.8 thru 0-1034 bar)
	0-20K thru 0-100K PSI.....316 SST and PH 13-8 Mo SST (0-1378 thru 0-6894 bar)
Wetted Parts	0-100 thru 0-15K PSI.....15-5 PH stainless steel (0-6.8 thru 0-1034 bar)
	0-20K thru 0-100K PSI.....PH 13-8 Mo SST (0-1378 thru 0-6904 bar)
	Shock Limitation.....100 G's
	Weight.....24 oz. (0.680 kilograms)
	Identification.....Laser etched onto body
	Enclosure.....Classification NEMA 4X

CERTIFICATIONS (Consult Factory for Available Options)

FM	Intrinsic Safety (570 only): Class I, II, III, Division 1, Groups A-G, Class I, Zone 0, AEx ia IIC, T4 at Ta=80°C, T5 at Ta=40°C Entity, Type 4X hazardous locations
	Explosion Proof: Class I, II, III Division 1, Groups A-G, AEx d IIC, T5 at Ta=88°C NEMA 4X hazardous locations
	Nonincendive (570 only): Class I, II, III Division 2, Groups A,B,C,D,F,G, Class I, Zone 2, Group IIC, T4 at Ta=88°C, T5 at Ta=40°C, Type 4X Hazardous locations
CSA	Intrinsic Safety (570 only): Ex ia IIC; Class I, Zone 0; Class I, II, III, Groups A-G; Type 4, T4 at Ta=80°C, T5 at Ta=40°C
	Explosion Proof (570, 870 only): Class I, II, III, Groups A-G Hazardous Locations
ATEX	Intrinsic Safety (570 only): II 1G, EEx ia IIC, -20°C, Ta <40°C, Flameproof: II 2 G EEx d IIC, T5 (-20°C ≤ Ta ≤ 80°C)
CE	EMC Directive 89/336/EEC and Low Voltage Directive 72/73/EEC
	EN 61010-1 (1993)/Safety Requirements
	EN 61326 (2001)/EMC Requirements
	PED Directive 97/23/EC

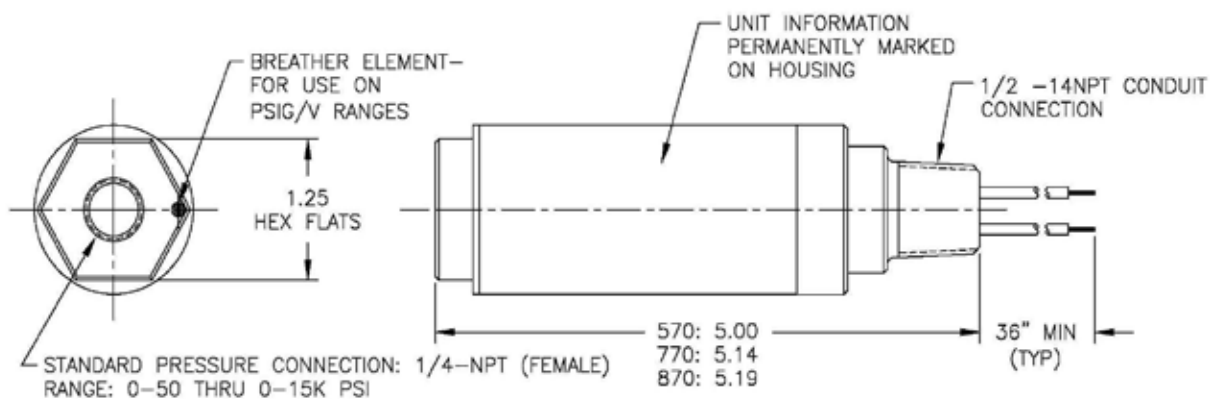
OPTIONS

Y()	Alternate pressure ports performance options
DF	Bleed port (10K PSI and below)
DG	Improved temperature compensation (<5%/100°F for zero/span)
DH	Special range
DM	Modified output (0-10 Vdc, 770 only)
DQ	Cleaning for oxygen service
EA	Special calibration run
JJ	Direct mount indicator with explosion proof housing
JS	Direct mount indicator
ME	CSA explosion proof label (570/870)
MR	Modified electrical damping (570)
NG	ATEX flameproof label
NH	Customer specified identification
NJ	CE label
NK	ATEX intrinsic safety label (570)
NX	CSA intrinsic safety label (570)
NY	FM explosion proof label
NZ	FM nonincendive label
PW	1/8 DIN digital indicator (consult factory)
QA	316 stainless steel wetted parts
QB	Inconel (X-750) wetted parts
QC	Hastelloy (C-276) wetted parts
TF	FM intrinsic safety label

Note: Application of some available options may affect standard performance. Consult your Viatran Representative for details.

ACCESSORIES

Mounting bracket
Conduit connection box
Loop powered digital indicator

FOR RANGES 0–15K PSIFOR RANGES 20K–100K PSI