



LED



Industrial



Test



Comm



Broadcast

Single Output Industrial Power Supplies

Features	Benefits
• Limited Lifetime Warranty	• Lower Cost of Ownership
• High Efficiency (up to 91%)	• Easier System Cooling
• Wide Range AC Input	• Supports Global Use



Specification						
Model		HWS15A/A	HWS30A/A	HWS50A/A	HWS100A/A	HWS150A/A
Input Voltage Range	-	85 - 265VAC (47 - 63Hz) Withstands 300VAC for 5s or 120 - 370VDC*				
Input Current (Typ) (1)	A	0.35 / 0.2	0.65 / 0.4	0.65 / 0.35	1.3 / 0.65	1.9 / 0.95
Inrush Current (1)	A	14 / 28				
Power Factor	-	Meets EN61000-3-2				
		-	-	0.97/0.91	0.98/0.93	0.98/0.93
Temperature Coefficient	%/°C	<0.02%/°C				
Overcurrent Protection	%	>105%				
Overvoltage Protection	V	Yes (see table)				
Hold Up Time (Typ)	ms	20				
Leakage Current (max)	mA	<0.5mA (Typ 0.2mA at 100VAC, 0.4mA at 230VAC)				
Remote Sense	-	No			Yes	
Indicator	-	Green LED = ON				
Operating Temperature (with cover)	°C	-10°C to +70°C, derate from 50°C to 70°C ⁽²⁾				
Storage Temperature	°C	-30 to +85°C				
Humidity (non condensing)	%RH	Operating: 30 - 90%RH, Non operating 10 - 95%RH				
Cooling	-	Convection				
Withstand Voltage	VAC	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.				
Isolation Resistance	MΩ	>100M at 25°C & 70%RH, Output to Ground 500VDC				
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s ² constant X, Y, Z 1 hour				
Shock	m/s ²	< 196.1 m/s ²				
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1, EN50178, UL508, CE Mark				
Line Dip	-	Complies with SEMI F47 (200VAC line only)				
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC-B, VCCI-B				
Immunity	-	IEC61000-4-2, -3, -4, -5, -6, -8, -11; IEC61000-6-2				
Weight (Typ)	g	190	240	300	470	520
Size (HxWxD) (with cover)	mm	31.5x82x80	31.5x82x95	31.5x82x120	33x82x160	42x82x160
Warranty	-	Limited Lifetime Warranty (See TDK-Lambda's terms and conditions)				

Notes:

* Safety certified for AC input only


(1) 100/200VAC.

(2) Derating varies with model. Please refer to individual model specification for derating graphs.


Model Selector								
Model	Voltage (V)	Adjust Range (V)	Max Current (A)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)	Over Voltage (V)	Efficiency (typ) %
HWS15A-3/A	3.3V	2.97 - 3.96	3	40	20	120	4.13-4.95	70/71
HWS30A-3/A	3.3V	2.97 - 3.96	6	40	20	120	4.13-4.95	75/77
HWS50A-3/A	3.3V	2.97 - 3.96	10	40	20	120	4.13-4.95	76/78
HWS100A-3/A	3.3V	2.97 - 3.96	20	40	20	120	4.13-4.95	82/84
HWS150A-3/A	3.3V	2.97 - 3.96	30	40	20	120	4.13-4.95	82/84
HWS15A-5/A	5V	4.0 - 6.0	3	40	20	120	6.25-7.25	77/79
HWS30A-5/A	5V	4.0 - 6.0	6	40	20	120	6.25-7.25	80/82
HWS50A-5/A	5V	4.0 - 6.0	10	40	20	120	6.25-7.25	82/84
HWS100A-5/A	5V	4.0 - 6.0	20	40	20	120	6.25-7.25	84/86
HWS150A-5/A	5V	4.0 - 6.0	30	40	20	120	6.25-7.25	85/87
HWS15A-12/A	12V	9.6 - 14.4	1.3	96	48	150	15-17.4	80/83
HWS30A-12/A	12V	9.6 - 14.4	2.5	96	48	150	15-17.4	84/86
HWS50A-12/A	12V	9.6 - 14.4	4.3	96	48	150	15-17.4	83/85
HWS100A-12/A	12V	9.6 - 14.4	8.5	96	48	150	15-17.4	86/88
HWS150A-12/A	12V	9.6 - 14.4	13	96	48	150	15-17.4	85/88
HWS15A-15/A	15V	12.0 - 18.0	1	120	60	150	18.8-21.8	81/84
HWS30A-15/A	15V	12.0 - 18.0	2	120	60	150	18.8-21.8	85/87
HWS50A-15/A	15V	12.0 - 18.0	3.5	120	60	150	18.8-21.8	83/86
HWS100A-15/A	15V	12.0 - 18.0	7	120	60	150	18.8-21.8	86/88
HWS150A-15/A	15V	12.0 - 18.0	10	120	60	150	18.8-21.8	86/89
HWS15A-24/A	24V	19.2 - 28.8	0.65	150	96	150	30-34.8	82/85
HWS30A-24/A	24V	19.2 - 28.8	1.3	150	96	150	30-34.8	86/88
HWS50A-24/A	24V	19.2 - 28.8	2.2	150	96	150	30-34.8	84/87
HWS100A-24/A	24V	19.2 - 28.8	4.5	150	96	150	30-34.8	87/89
HWS150A-24/A	24V	19.2 - 28.8	6.5	150	96	150	30-34.8	88/90
HWS15A-48/A	48V	38.4 - 52.8	0.33	240	192	200	55.2-64.8	80/80
HWS30A-48/A	48V	38.4 - 52.8	0.65	240	192	200	55.2-64.8	82/83
HWS50A-48/A	48V	38.4 - 52.8	1.1	240	192	200	55.2-64.8	84/86
HWS100A-48/A	48V	38.4 - 52.8	2.1	240	192	200	55.2-64.8	88/90
HWS150A-48/A	48V	38.4 - 52.8	3.3	240	192	200	55.2-64.8	89/91

Options	
Suffix	Description
Blank	No Cover
/ A	Cover
/ R	Remote on/off (available 50W, 100W & 150W models)
/ HD	See HWS/HD datasheet for details. -40°C start up and PCB coating (not available on HWS15A)
/ ME	See HWS/ME datasheet for details of available models IEC/EN60601-1 medical approval (not available on HWS15A)


HWS15A/A Outline Drawing

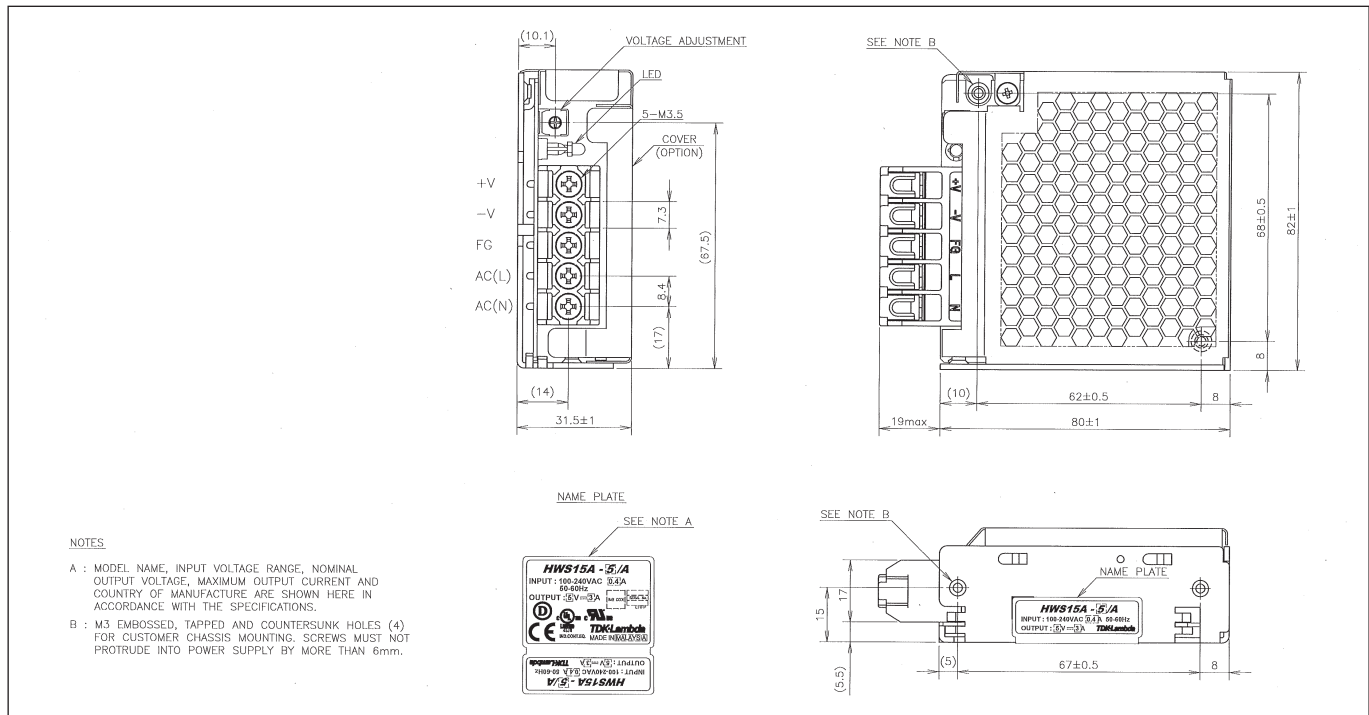


HWS30A/A Outline Drawing

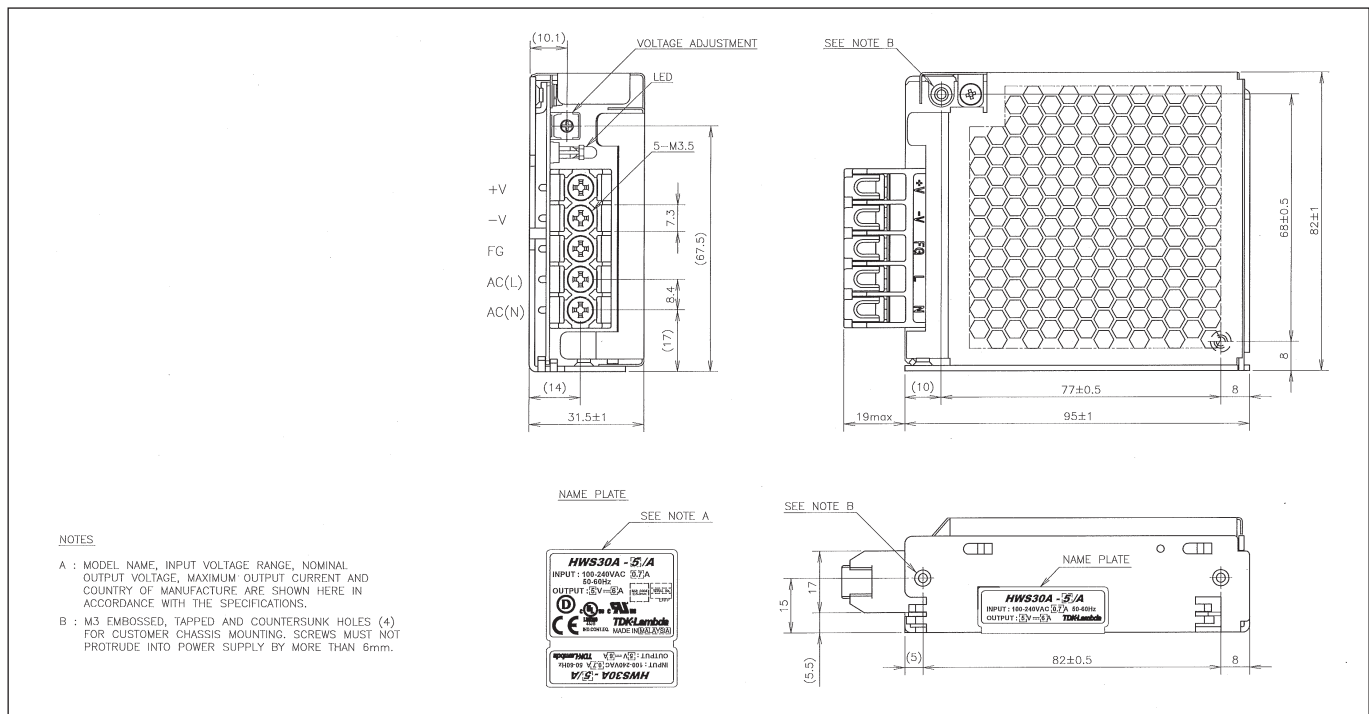

HWS50A/A Outline Drawing

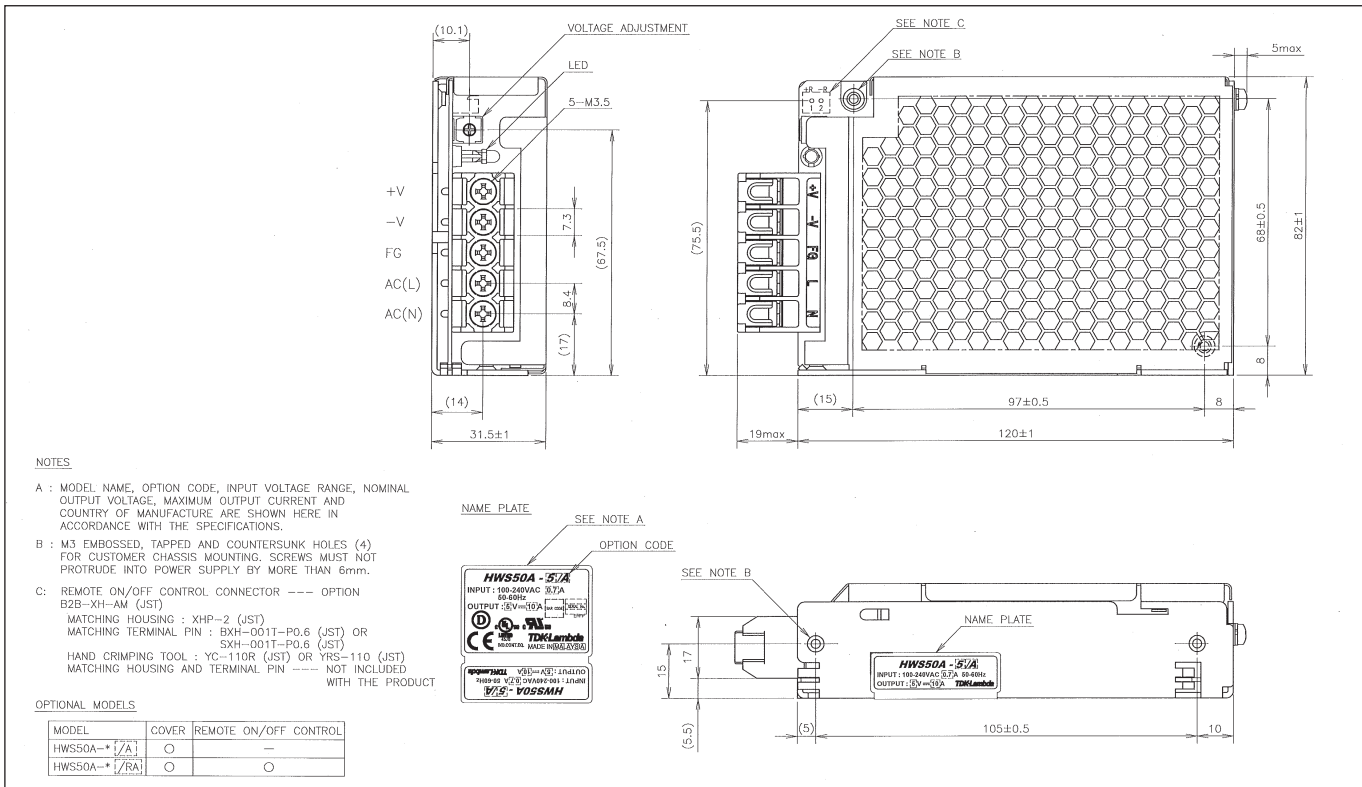

HWS100A/A Outline Drawing

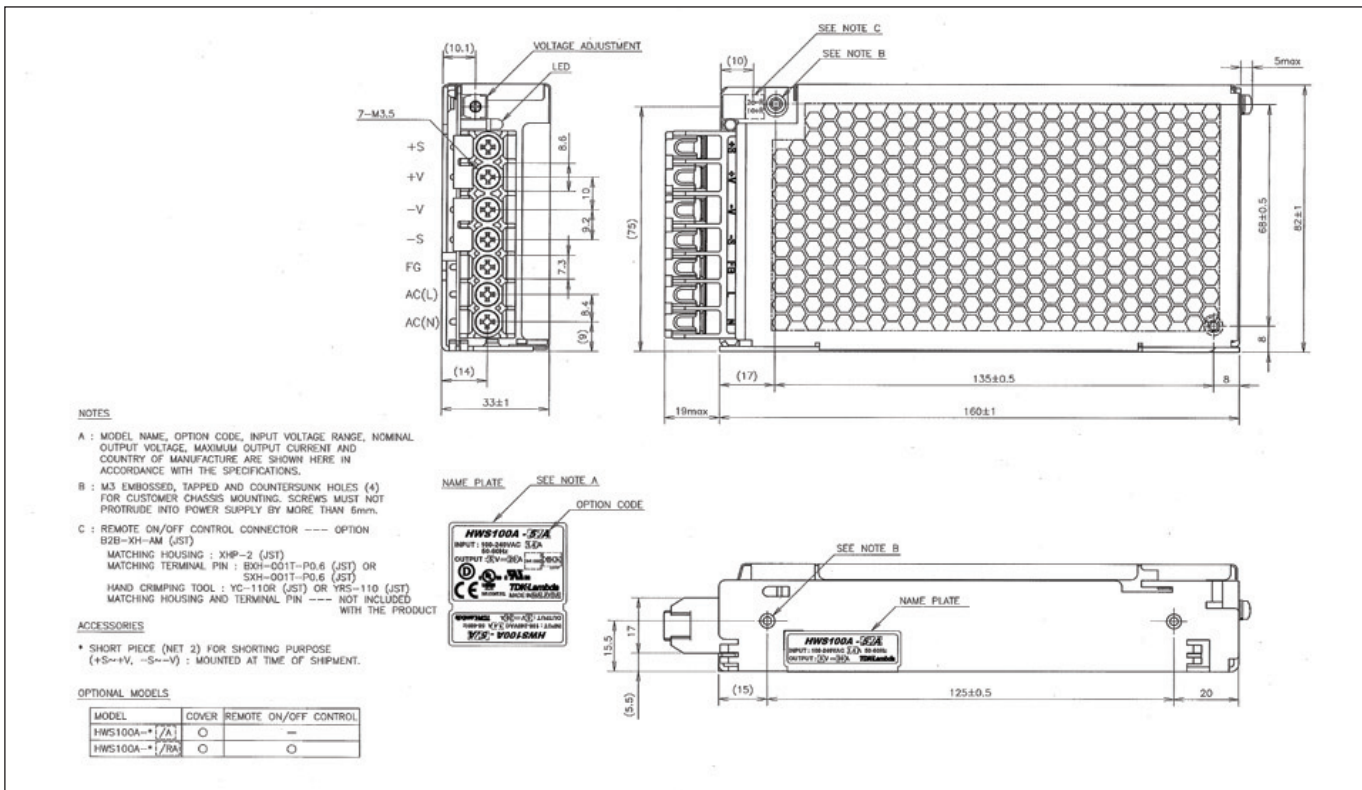

HWS150A/A Outline Drawing

