


AC to DC PFC, 4 Outputs, 1 Main Channel & 3 Secondary Channels, 819W

**Replacement for Astec
Model AA23260**

3 Secondary Channels on DC Terminal
Block with 6-32 screws. 3.3V @ 30A, 5V @
20A, & 5V @ 4A






110/220VAC
1P AC Input
Terminal Block

DC Bus Bars with 1/4 holes
for Main Output Channel
12V @ 50A

DB25 Option Connector:

Pin 1: CH1 Remote Sense (+)
Pin 3: DC Output Good with LED (-8TL)
Pin 4: CH1 Remote Sense (-)
Pin 14: Logic Return
Pin 16: AC Fail with LED (-1CL)

All other pins NC

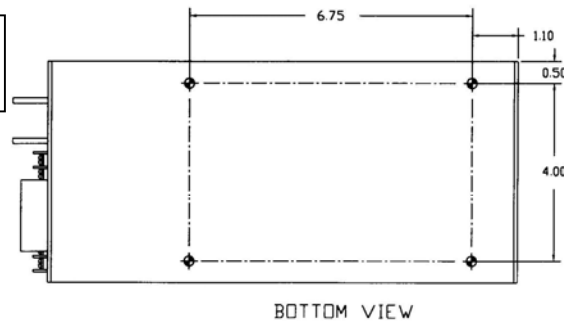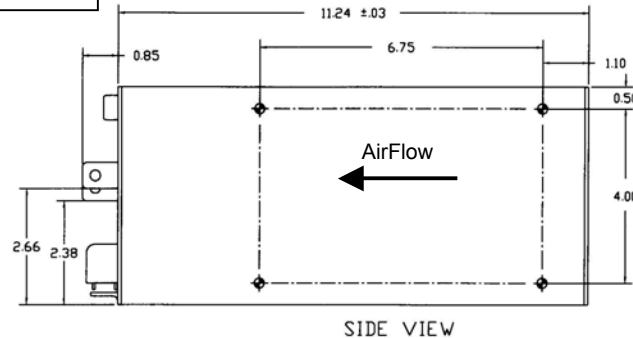

4 mounting holes for 8-32 screws are
provided on one side and the bottom



PM3384B-6-4-2-N, 819W, 12/11/15

Pioneer Magnetics' reserves the right to change the specifications at any time without prior notice. It is Pioneer Magnetics' policy to improve products as new techniques and components become available. 1745 Berkeley Street, Santa Monica CA 90404. Tel: (310) 829-6751 Fax: (310) 453-3929. E-mail: pmi@pioneeermagnetics.com. Web Address: <http://www.pioneeermagnetics.com>