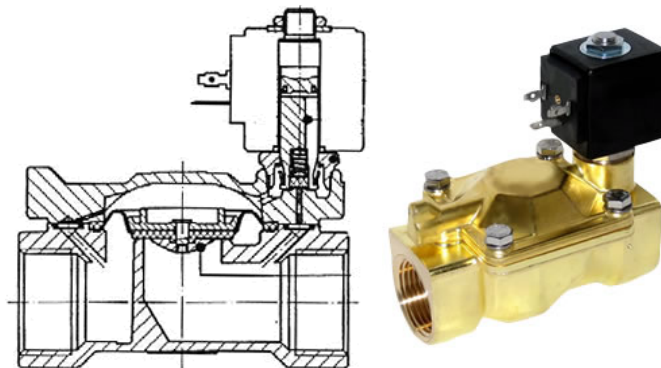


Model #
W5000-0002-way, internally piloted, normally
closed solenoid valve**3/4"**

Pipe Size (Inch)

3/4"

Orifice Size (Inch)

9.80

Flow Factor (CV)

8 watts

Wattage (W)

2–230 psi

Pressure Range (PSI)

NBR

Sealing Material

14°–195° F

Temperature Range

Air, Inert gas, Water

Medium Examples

Materials of Construction

Body:	Brass
Armature Tube:	Stainless Steel 300
Fixed Core:	Stainless Steel 400
Plunger:	Stainless Steel 400
Spring:	Stainless Steel 300
Shading Ring:	Copper
Orifice:	Brass

Valve Dimensions


Valve Width (A):	2 9/16"
Valve Length (B):	4 3/32"
Valve Height (C):	4 1/8"
Coil Width (D):	1 3/16"
Coil Length (E):	1 21/32"
Coil Length (F):	2 1/8"

Electrical Specifications

Rating:	NEMA 4
Inrush VA (AC only):	25
Holding VA (AC only):	14.0
Strain Relief Connector:	Model 009
1/2" Conduit Connector:	Model 010
6 ft. Power Cord:	Model GRN100

Spare Part Numbers

Kit:	KTGOW3KB19
------	-------------------

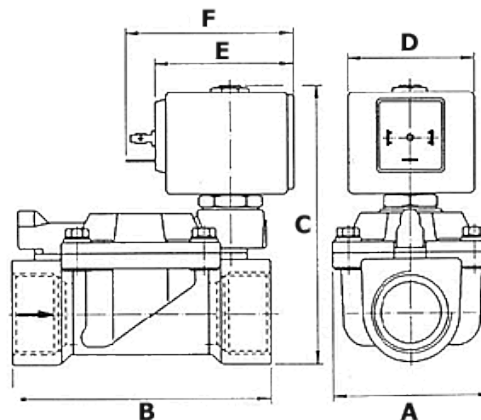**Note:** Valve is pictured above with a sample coil, which may or may not reflect the exact specifications of this particular build.