

MaxiFil - Art. No.:65 650 100

- » High filter capacity
- » Safe filter change



Applications

- » Also suitable for high-alloy steel
- » Medium levels of smoke and dust
- » Regular use

Benefits

- » Safe operation by rotation field control
- » Exhaust arm requires less adjustment due to exhaust hood design
- » Increased safety due to filter monitoring
- » Increased safety with safe filter change
- » Very economic due to long lasting high capacity filters

Properties

- » Automatic Start/Stop (optional)
- » Lighting in the hood (optional)
- » Exhaust arm up to 4 m
- » Rotating exhaust hood

Accessories

- » Automatic Start/Stop
- » Lighting in the hood
- » On/Off switch on exhaust hood





Technical Data

Art. No	65 650 100
Filter	
Filter stages	2
Filter method	Disposable filter
Filter surface	ca. 42 m ²
Type of filter	SafeChangeFilter
Filter material	Non-woven polyester
Filter efficiency	> 99.5 %
Filterclass	E12
Additional filters	Pre-filter
Basic data	
Extraction capacity	1,100 m ³ /h
Weight	129 kg
Motor power	1.5 kW
Power supply	3 x 400 V / 50 Hz
Rated current	3.1 A
Control voltage	24 V, DC
Noise level	70 dB(A)

Additional information	
IFA-Certification	W3-Approved
Fan type	Radial fan
Quantity of extraction arms	1
Exhaust arm type	flexible exhaust arm
Diameter extraction arm	150 mm
Length of exhaust arm	2 m



Suitable for alveole exchangeable dusts
separation > 99 % of particles < 0,4 µm

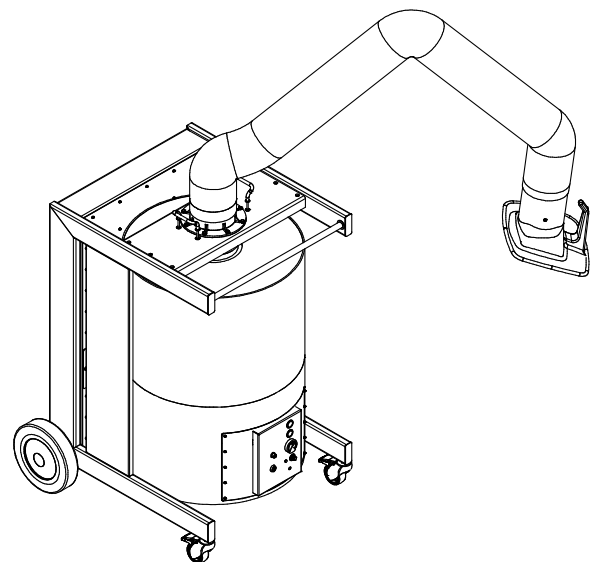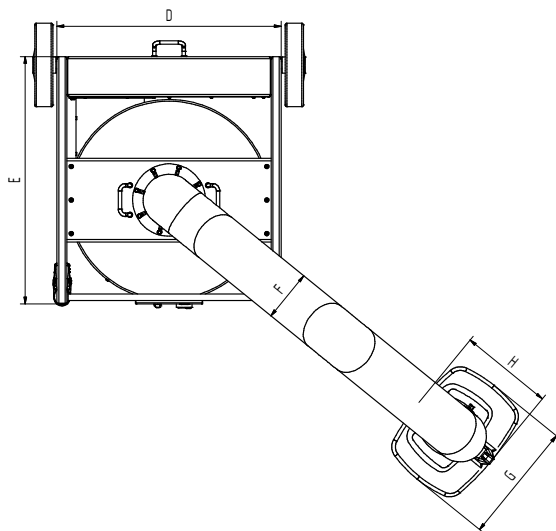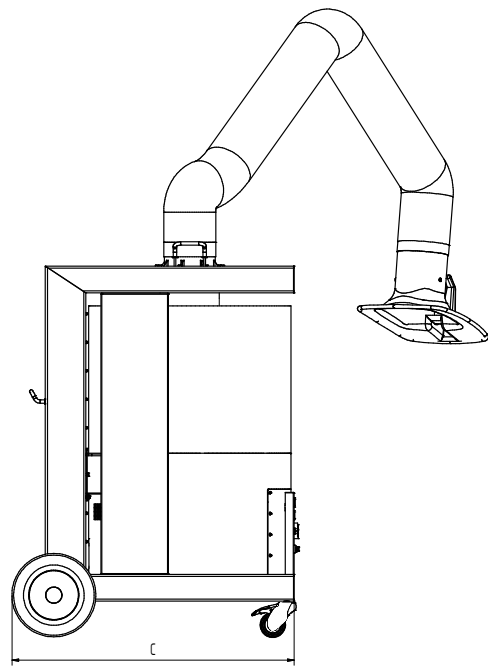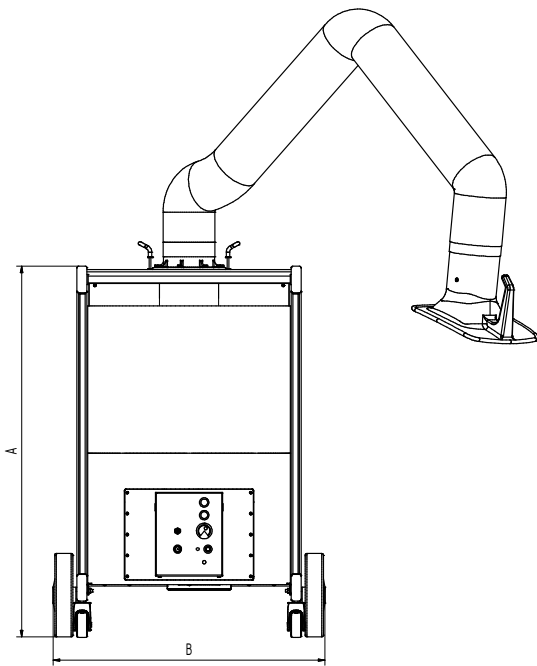

Technical Data

Dimensions

A	1,109 mm
B	807 mm
C	884 mm
D	665 mm
E	738 mm
F	150 mm
G	360 mm
H	295 mm