
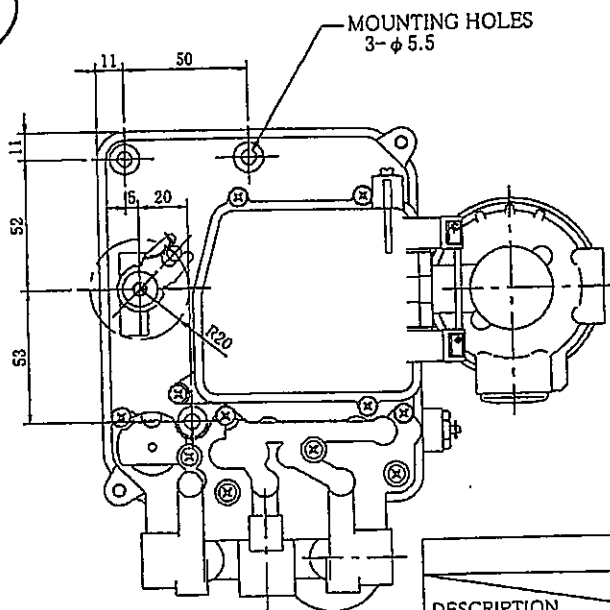
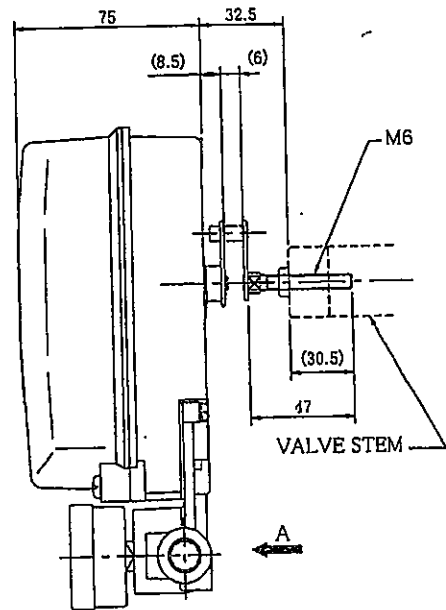


ELECTRO-PNEUMATIC POSITIONER (for KOSO 6300R)

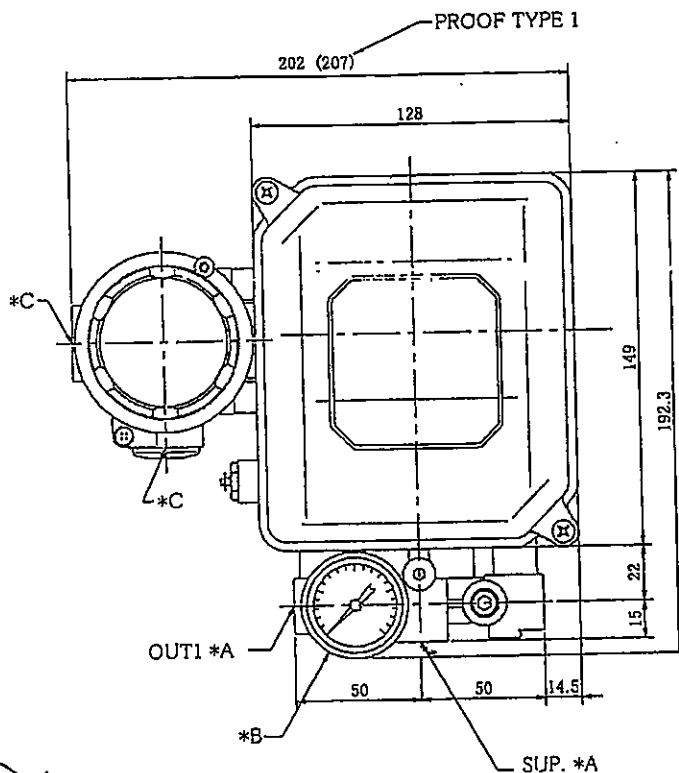

A VIEW

MODEL EPA8□4-L□□

*1	PROOF TYPE
☒ 0	WEATHER PROOF
☐ 1	Exsd II CT6
☐ 2	Exia II CT6

*2	GAUGE TYPE				
☐ 2	☐ 2kgf/cm ²	☐ 200kPa	☐ 2bar	☐ 30psi	
☐ 4	☐ 4kgf/cm ²	☐ 400kPa	☐ 4bar	☐ 60psi	
☒ 10	☐ 10kgf/cm ²	☒ 1000kPa	☐ 10bar	☐ 160psi	

*3	SERVICE		
☒	WEATHER PROOF	☐ Exsd II CT6	☐ Exia II CT6
☒	-20~80°C <STANDARD>	-20~60°C	-20~60°C
☐ L	-50~60°C <LOW TEMP.>		-30~60°C
☐ H	0~100°C <HIGH TEMP.>		

*A *B CONNECTION				
DESCRIPTION	UNIT	☒	☐	☐ SPECIAL
*A AIR CONNECTION	Rc1/4		1/4NPT	
*B GAUGE CONNECTION	Rc1/8		Rc1/8	

*C	CONDUIT CONNECTION
☒	G 1/2
☐	1/2NPT

Rc=PT
G=PF

APPROX. Weight: 2.3kg

NOTE:
FOR SPRING RETURN ACTING ACTUATOR

EPA804-L10

DRAWING No.

E-EPA804

REV

B

KOSO